



# SUPER

## FAÇADE SCAFFOLDING

STRONGER.  
TOGETHER.

 **scafom-rux**

## MANAGEMENT



**Volker Rux**  
Managing Director

T +49 2331 47 09-0  
[info@scafom-rux.de](mailto:info@scafom-rux.de)



**Marco Hiby**  
Sales Management

T +49 2331 47 09-200  
M +49 151 16 20 65 01  
[marco.hiby@scafom-rux.de](mailto:marco.hiby@scafom-rux.de)

## RENTAL



**Stephan Winterhoff**  
Rental Manager

T +49 2331 47 09-114  
M +49 171 56 57 432  
[stephan.winterhoff@scafom-rux.de](mailto:stephan.winterhoff@scafom-rux.de)



**Heiko Ulrich**  
Rental

T +49 2331 47 09-205  
M +49 151 62 50 97 50  
[heiko.ulrich@scafom-rux.de](mailto:heiko.ulrich@scafom-rux.de)



**Philine Lüling**  
Rental

T +49 2331 47 09-204  
[philine.lueling@scafom-rux.de](mailto:philine.lueling@scafom-rux.de)



**Tim Bauer**  
Rental

T +49 2331 47 09-210  
[tim.bauer@scafom-rux.de](mailto:tim.bauer@scafom-rux.de)



**Nadine Prokopp**  
Rental

T +49 2331 47 09-257  
[nadine.prokopp@scafom-rux.de](mailto:nadine.prokopp@scafom-rux.de)

## INTERNATIONAL SALES



**Deniz Bozkir**  
Global Account Manager

T +49 2331 47 09-264  
M +49 151 15 34 91 40  
[deniz.bozkir@scafom-rux.de](mailto:deniz.bozkir@scafom-rux.de)

## SALES D / A / CH

### SALES DEPARTMENT



**Etienne Terlitzki**  
Sales Manager

T +49 2331 47 09-268  
[etienne.terlitzki@scafom-rux.de](mailto:etienne.terlitzki@scafom-rux.de)



**Udo Lüling**  
Sales

T +49 2331 47 09-230  
[udo.lueling@scafom-rux.de](mailto:udo.lueling@scafom-rux.de)



**Tim Tempelmann**  
Sales

T +49 2331 47 09-258  
[tim.tempelmann@scafom-rux.de](mailto:tim.tempelmann@scafom-rux.de)



**Marina Calamonte**  
Sales

T +49 2331 47 09-253  
[marina.calamonte@scafom-rux.de](mailto:marina.calamonte@scafom-rux.de)



**Sonia Sfragara**  
Sales

T +49 2331 47 09-251  
[sonia.sfragara@scafom-rux.de](mailto:sonia.sfragara@scafom-rux.de)



**Alexander Stehnuhl**  
Sales

T +49 2331 47 09-266  
[alexander.stehnuhl@scafom-rux.de](mailto:alexander.stehnuhl@scafom-rux.de)



**Sebastian Wiegand**  
Sales

T +49 2331 47 09-259  
[sebastian.wiegand@scafom-rux.de](mailto:sebastian.wiegand@scafom-rux.de)

### SALES REPRESENTATIVES



**Wulf D. Basse**  
PLZ: 1/23923-23996

T +49 30 47 03 90 00  
M +49 172 21 21 100  
[wulf.basse@scafom-rux.de](mailto:wulf.basse@scafom-rux.de)



**Jörn Winkler**  
PLZ: 2 (w/o 23923-23996)

T +49 441 68 26 82  
M +49 151 16 20 65 04  
[joern.winkler@scafom-rux.de](mailto:joern.winkler@scafom-rux.de)



**Thomas Venn**  
PLZ: 3/48-49/57-59/586-589

T +49 2331 47 09-245  
M +49 151 16 20 41 09  
[thomas.venn@scafom-rux.de](mailto:thomas.venn@scafom-rux.de)



**Sebastian Kurowski**  
PLZ: 3/48-49/57-59/586-589

T +49 511 45 01 00 00  
M +49 170 16 12 446  
[sebastian.kurowski@scafom-rux.de](mailto:sebastian.kurowski@scafom-rux.de)



**Marco Schröder**  
PLZ: 40-47 Rheinland Süd

T +49 2331 47 09-243  
M +49 151 14 77 39 20  
[marco.schroeder@scafom-rux.de](mailto:marco.schroeder@scafom-rux.de)



**Maximilian Rux**  
PLZ: 40-47 Rheinland Nord

M +49 171 29 26 301  
[maximilian.rux@scafom-rux.de](mailto:maximilian.rux@scafom-rux.de)



**Daniel Hesbacher**  
PLZ: 50-56/580-585

T +49 2331 47 09-255  
M +49 151 46 16 97 55  
[daniel.hesbacher@scafom-rux.de](mailto:daniel.hesbacher@scafom-rux.de)



**Markus Lock**  
PLZ: 6/7/88-89 + CH

M +49 160 90 14 28 51  
[markus.lock@scafom-rux.de](mailto:markus.lock@scafom-rux.de)



**Mirko Langer**  
PLZ: 80-87/90-97

T +49 8664 32 50 42  
M +49 151 14 77 39 22  
[mirko.langer@scafom-rux.de](mailto:mirko.langer@scafom-rux.de)



**Robert Fröhlich**  
PLZ: 0/98-99

M +49 151 16 20 41 08  
[robert.froehlich@scafom-rux.de](mailto:robert.froehlich@scafom-rux.de)

## CONTACT

**T +49 2331 47 09-180**  
**WWW.SCAFOM-RUX.DE**  
**SALES@SCAFOM-RUX.DE**

**Central Depot Hagen**  
Neue Str. 7  
58135 Hagen  
T +49 2331 47 09-0

**Depot Berlin**  
Kopenhagener Str. 74a  
13407 Berlin-Reinickendorf  
T +49 30 47 03 9000

**Depot Hamburg**  
Kulemannstieg 5  
22457 Hamburg  
T +49 40 54 80 57 48

**Depot Hannover**  
Entenfangweg 9  
30419 Hannover  
T +49 511 450 100 00

**Depot Leipzig**  
An der Bahn 11  
04319 Leipzig-Engelsdorf  
T +49 341 251 38 05

**Depot Munich**  
Krautgartenstr. 36  
85241 Hebertshausen  
T +49 8131 702 9999

**Depot Switzerland**  
Kantonsstrasse 131  
CH-6048 Horw  
T +41 41 244 0770



## SUPER - FAÇADE SCAFFOLDING

**02** | CONTACT PERSONS

**03** | CONTENTS

**04-05** | SYSTEM OVERVIEW

**06-11** | ADVANTAGES / TRBS 2121 TABLE

**12-13** | STAIR TOWERS

### PRICE LIST

**14-55** | PRODUCTS

**14-15** | SCAFFOLD BASIS

**16-19** | VERTICAL FRAMES

**20-23** | DIAGONALS / SIDE PROTECTION

**24-27** | TRANSOMS

**28-30** | DECKS

**31-32** | ACCESS HATCHES

**33-36** | LADDERS / STAIRS

**37-42** | BRACKETS

**43-45** | SCAFFOLD FINISH SECTION

**46-49** | LUG SCAFFOLD

**50** | ANCHORAGE

**51-53** | ACCESSORIES AND LOGISTICS

**53-55** | PERSONAL PROTECTION

**56-57** | PRICE EXAMPLES

**58-65** | SPARE PARTS

**66-69** | ASSEMBLY

**70-71** | USE OF SYSTEM DECKS

**72-73** | APPROVALS SUPER 65 AND SUPER 100

**74-75** | SCAFOM-RUX SERVICE / APP / ANIMATIONS

**76-77** | PRODUCT OVERVIEW

**78-79** | RENTAL

## GOOD TO KNOW

### METRIC, LOGICAL

Material calculations become child's play since the RUX SUPER 65/100 modular system is based on metric dimensions. For example:

**Frame width** 0.65 m and 1.00 m

**Frame height** 2 m


**Bay length** 0.50 m to 4.00 m



### INGENIOUSLY SIMPLE

All the important connections can be mounted without the need for tools, simply and in just a few easy steps. Thanks to its specific geometry, the scaffolding is self-aligning.



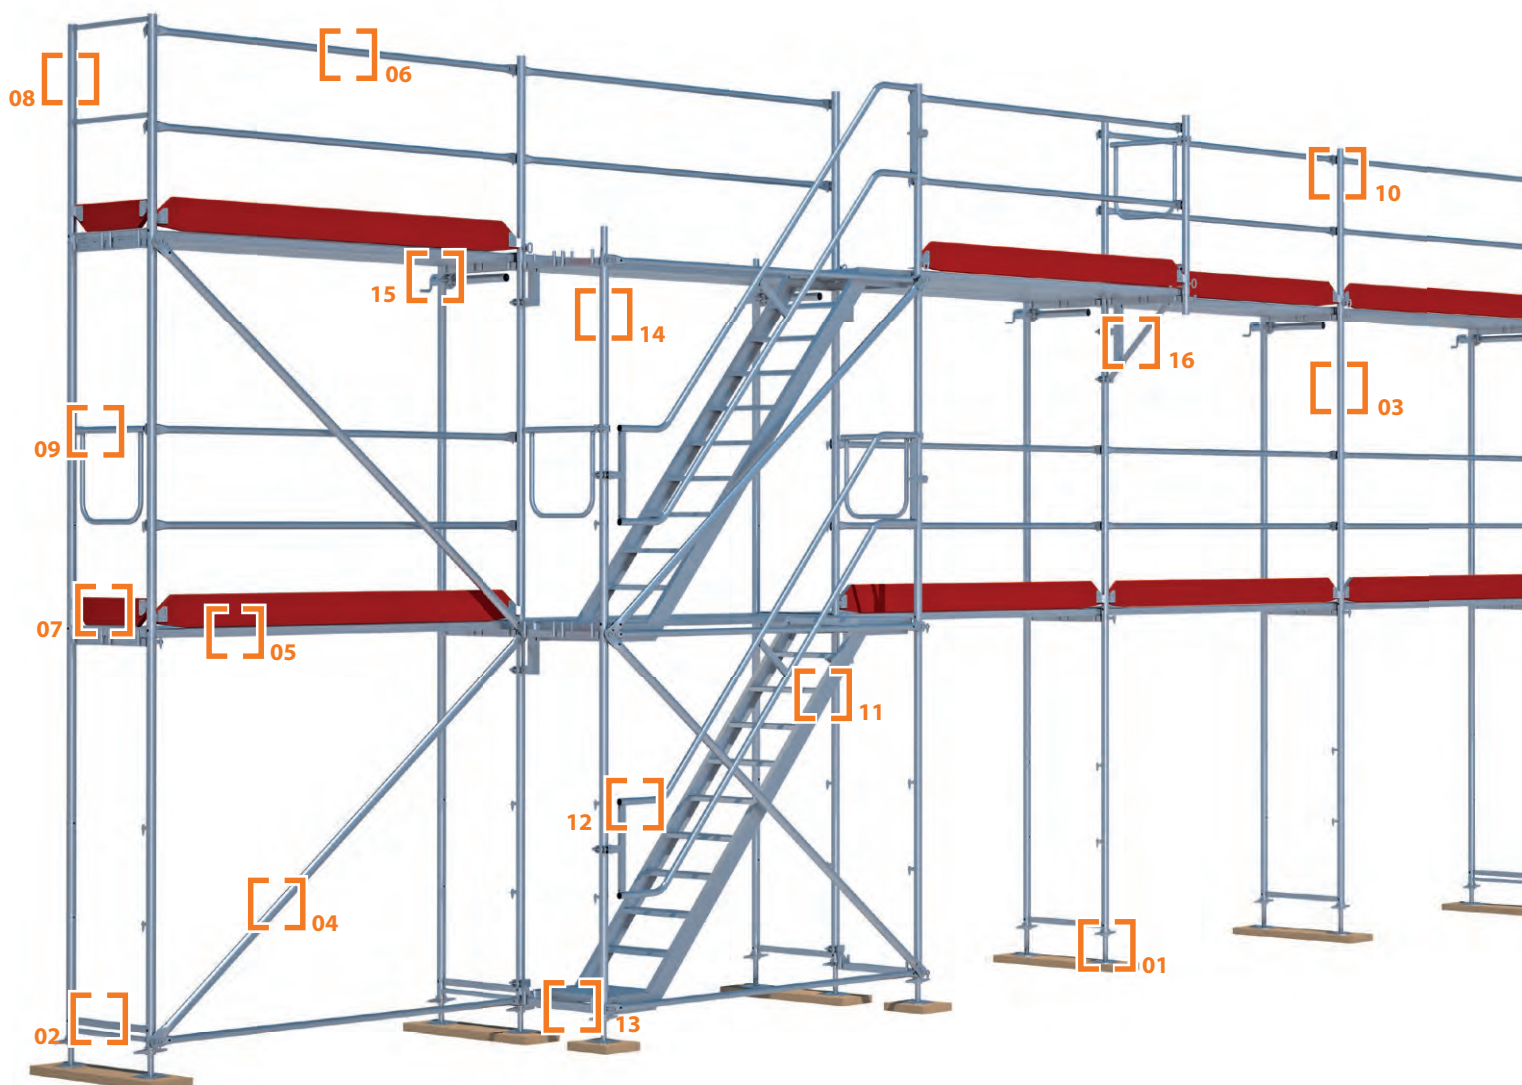

## ERECTION? QUICK AND SIMPLE! **VERY FEW BASIC ELEMENTS - SUPER SYSTEM**

- |   |  |  |
|---|--|--|
| <b>01</b> Base jack                         | <b>07</b> Toe board                        | <b>13</b> Stairway standard starting piece |
| <b>02</b> Base transom                      | <b>08</b> Front guardrail frame            | <b>14</b> Stairway standards               |
| <b>03</b> Vertical Frame                    | <b>09</b> Front guardrail, double          | <b>15</b> Steel shore tube                 |
| <b>04</b> Diagonal                          | <b>10</b> Guardrail post                   | <b>16</b> Cantilever bracket               |
| <b>05</b> Decking planks                    | <b>11</b> Aluminium stairway with platform |  |
| <b>06</b> Back guardrail /Longitudinal tube | <b>12</b> Double handrail                  |  |

**The proven SUPER system** makes do with very few basic elements, but thanks to the wide product range, it can be enlarged to such an extent that there is hardly any challenge in façade scaffolding that cannot be overcome with this system. You can see just how simple it is to assemble the SUPER system in our animation.





## STEEL, ALUMINIUM, 65 OR 100 CM WIDTH, LUG OR GRAVITY LOCK? **EXACTLY.**


**Various options for different applications** – but always compatible.

That was and is our objective whenever we develop system solutions.

The large number of users speaks for itself.



Gravity lock connection



Lug connection

**The practical gravity lock** ensures a self-securing connection between the frames and guardrails or diagonals. The components can be easily mounted by just one person without any walking back and forth. And, of course, the “good old” lug connection is still included in our range.

### SUPER 65/100 STEEL



### SUPER 65 ALUMINIUM



### SUPER 65 STEEL-ULTRA



### FROM SUPER TO ULTRA - THE EVOLUTION OF A SCAFFOLD FRAME

**Previously, steel was steel** – the rest did not matter. Today, every gram counts since vertical and horizontal transportation is the most important economic factor in scaffolding. Anyone addressing this issue is relatively far ahead, but anyone that can also consider the health and well-being of staff members at the same time can only be a winner! That is why the ULTRA frame out of steel with an enhanced yield strength represents an enormous step forward. The same load-bearing capacity, less weight, compatible.



	MSG Basic Set	MSG Extension Set	MSG Standard Set	MSG Universal Set	Double Post
<b>Corresp. catalogue page</b>	p. 22	p. 22	p. 21/22	p. 21/22	p. 22
<b>Categorisation</b>					
<b>Conforms to TRBS 2121 (Status 30.4.2020)</b>	✓	✓	✓	✓	✓
<b>Upward moving solution</b>	✓	✓	✓	✓	
<b>Definitive solution</b>					✓
<b>Removal possible</b>					By means of tools
<b>Assembly characteristics</b>					
<b>Without mechanical parts</b>	✓	✓			✓
<b>Installation without tools possible</b>	✓	✓	✓	✓	Ratchet
<b>Can also be used on the inside</b>					✓
<b>Can be used for front side</b>					✓
<b>Stability of components</b>	★★★★★	★★★★★	★★★★★	★★★★	★★★★★
<b>Economic efficiency</b>					
<b>Stock material usable</b>	✓	✓			✓
<b>Transport/storage</b>	★★★★★	★★★★★	★★★★★	★★★★★	★★★★★
<b>Low investment</b>	★★★★★	★★★★★	★★★★★	★★★★★	★★★★★
<b>Visible proof of performance</b>					✓
<b>Matching systems</b>					
<b>Matching for system</b>	SUPER, SUPER-Lug	SUPER	SUPER, SUPER-Lug	SUPER, SUPER-Lug, FRAMESCAFF, RINGSCAFF, VARIANT	SUPER, SUPER-Lug FRAMESCAFF
<b>Arguments</b>					
<b>Decision-making horizon</b>	Short term and expandable	Short term and expandable	Medium term	Medium term	Short term
<b>Main argument of the technician</b>	Familiar material	Familiar material	Easy to use, innovative railings	Identical handling for modular and façade scaffolding	Safe, familiar handling
<b>Main argument of the merchant</b>	Existing material, low investment	Existing material, low investment	Manageable investment	One investment for multiple systems	Low investment and visible proof of performance
<b>Main argument of the planner</b>	Well-known units	Well-known units	Accepted, well-known market solution	Universal solution	Well-known units and definitive solution



# BUILT-IN SAFETY

COMPLIANT WITH TRBS 2121

*Essentially, the TRBS 2121 regulations ensure greater safety in scaffolding, as the potential hazards associated with the assembly of the top layer should be a thing of the past. Put simply, the guardrail must be in place before the layer is entered.*

When implementing the TRBS 2121 specifications in our product range, one thing was particularly important for our users: it had to be possible to continue using existing systems!

## SUSTAINABLE SYSTEM CONCEPT

---

## DIFFERENT APPROACHES FOR DIFFERENT SOLUTIONS

---

## EASY HANDLING

---

## ERGONOMIC DESIGN

---

## OPTIMUM STORABILITY

---

## SENSIBLE UTILISATION OF TRANSPORT SPACE

---


Scafom-rux product engineers are very familiar with the topics of safety, handling and optimised logistics - but it is only with a keen eye for detail and an open ear for the needs of our customers that we can achieve the competitive edge that distinguishes us as one of the industry's innovation leaders.

# WE CAN TELL YOU MANY THINGS...

BUT FIRST WE HAVE LISTENED TO YOU

*Our users are our most important driving force because how would we otherwise know what is needed on the market? Of course, we are also represented on various committees and associations to know at an early point in time e.g. which direction legal or insurance requirements are moving in.*

*And then we implement not just what we would call the "development of scaffolds" - instead we prefer to see ourselves as a competent developer of "safety technology". Since we want you and your customers to be able to work in a safe and secure environment: for example, with our RUX SUPER scaffolding.*

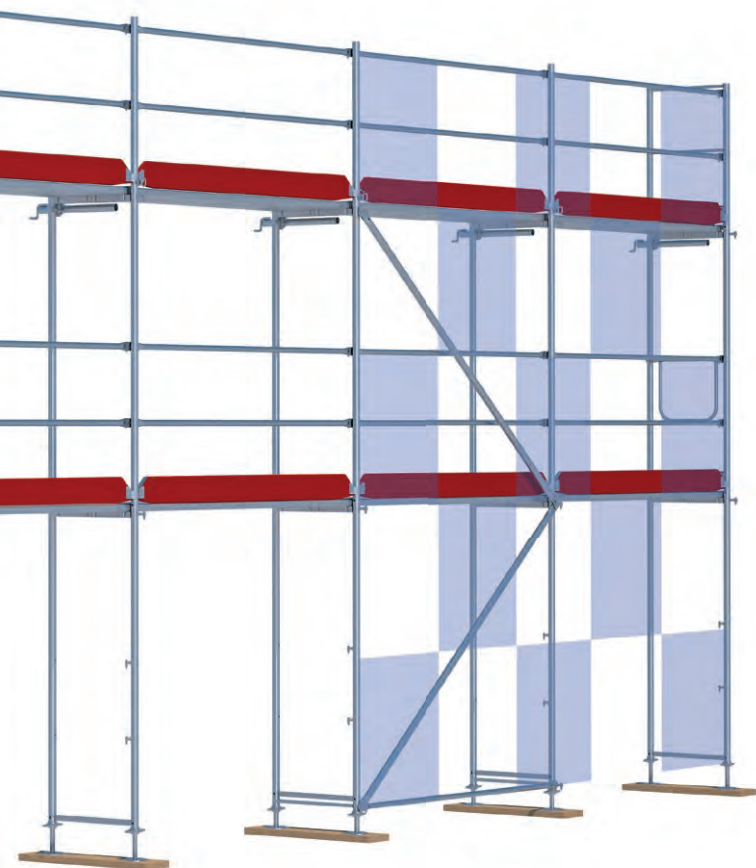

*Why do we make such a big thing out of having meters? Well, it is something that you cannot just take for granted. Just take a look at the market – and you had better order a calculator as well when you are confronted with challenging individual bay lengths.*

## LOGICAL, METRIC MODULAR DIMENSIONS

One metre is one metre! Sounds logical. And it is simple to calculate. That is why the lengths and heights of our scaffold bays are similarly in metric dimensions. You can quickly assemble scaffolding with bay lengths of up to 4 metres with just a few component parts. In this respect, all bay lengths of above 1.00 m can be combined with one another. The standard frame height is 2.00 m.

## FLEXIBLE MODULAR SYSTEM



Scaffolding for numerous applications can be assembled with just a few component parts. Thanks to excellent statical values and a comprehensive range of special parts and accessories, you do not have to bother about any time-consuming screw connections.

## INGENIOUSLY SIMPLE ASSEMBLY

All the important connections from vertical frames and decks to diagonals and back guardrails are free of any screws and wedges. The prescribed scaffold geometry is an essential element of what we understand by an "enforced, self-aligning assembly process". That means that you simply have to level out the lowermost level of the scaffolding when in use and you may then rest assured that all scaffold elements that follow will automatically be aligned so as to be absolutely perpendicular as it is not possible to do it in any other way. This makes the work quick and prevents any assembly errors!

The pins welded on to the frames mean that the fitting of the decks is also predefined thereby preventing any slipping off to the side. This will put a smile on the face of the structural engineer: the decks become statical elements by being firmly locked into place.



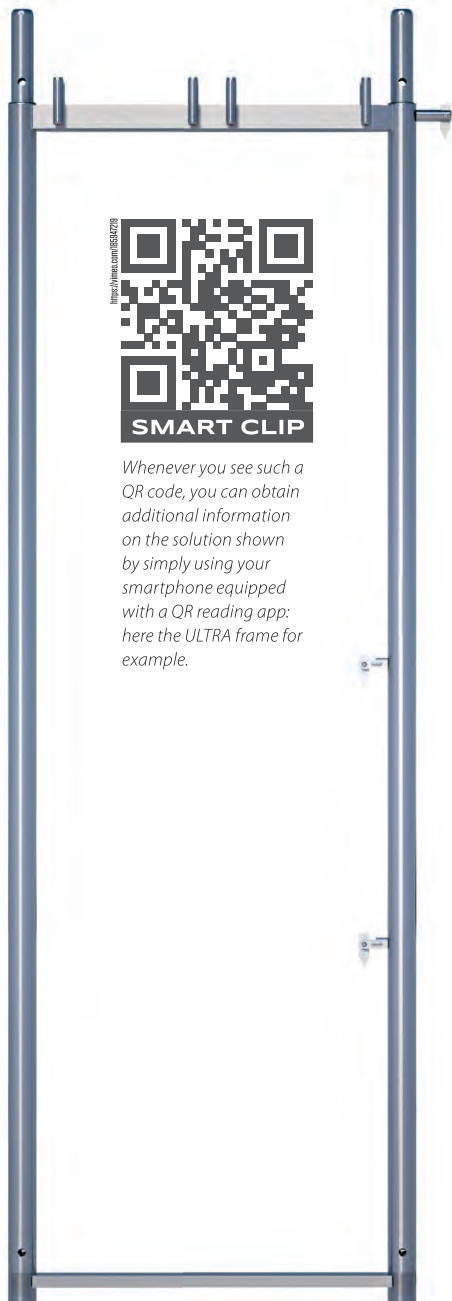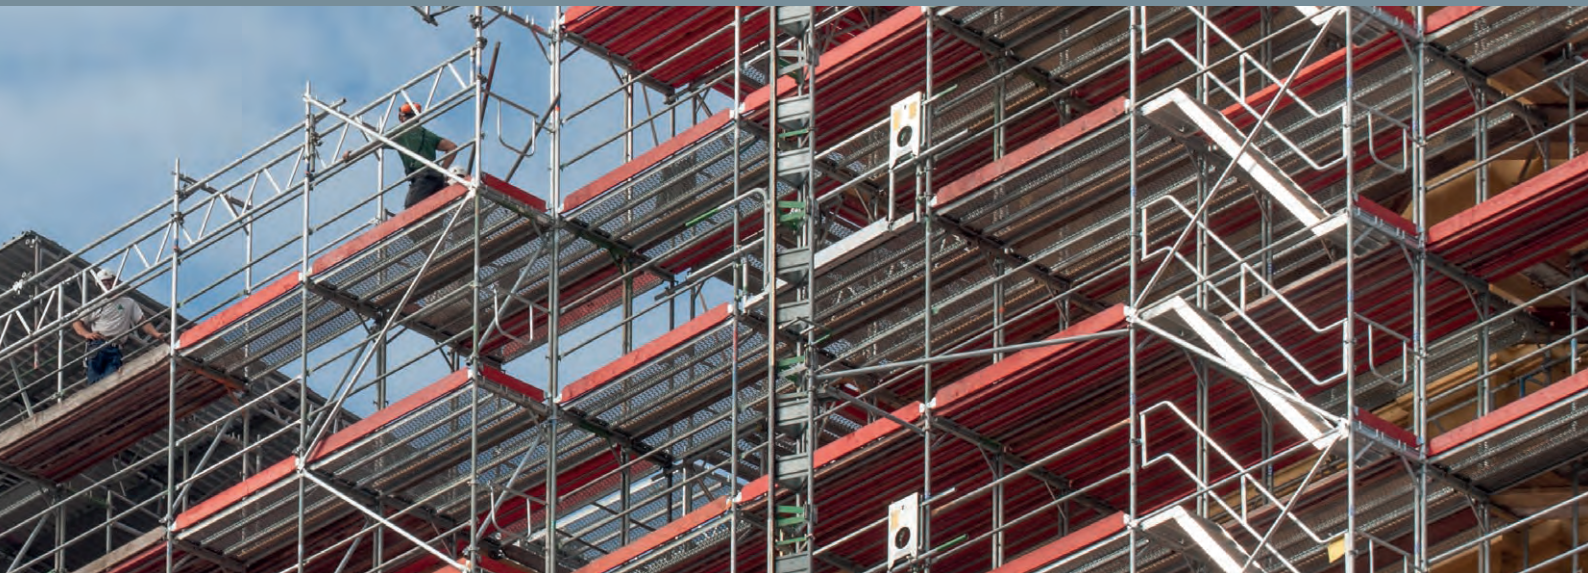


Whenever you see such a QR code, you can obtain additional information on the solution shown by simply using your smartphone equipped with a QR reading app: here the ULTRA frame for example.

### OPTIMAL WEIGHT

The low weight is one of the most significant features of the RUX SUPER 65/100 façade scaffolding. This effect is reinforced by the ideal scaffold widths of 65 cm and 100 cm. This system offers excellent ergonomics and is one of the lightest scaffolds on the market.

It has become even lighter thanks to the new ULTRA frame. This frame can do everything that the classic one can also do, but is considerably lighter. Despite its thin walls, it remains fully combinable and can be fully loaded. This is due to the use of St 355 steel that has an enhanced yield strength and to the buckled tube design at the bottom of the frame which can still be fitted onto the conventional connecting pieces. Catchword: sustainability!

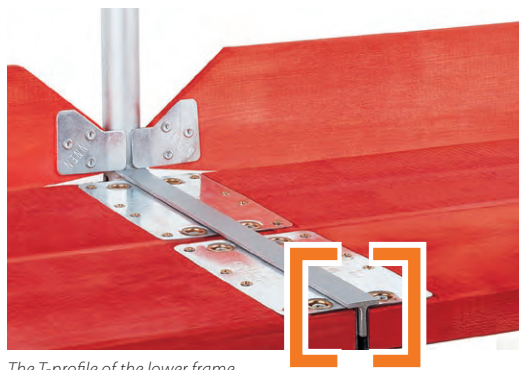

The T-profile of the lower frame transom – here a cross-section. Each new scaffolding level automatically secures the decks, making lifting impossible.



Power centre: the SUPER scaffold node makes this façade system an outstanding workplace from a statics point of view.

### UNIQUE SAFETY STANDARDS

Thanks to the unique T-profile as a lower frame transom, tripping hazards have become a thing of the past. The T-profile secures the decks against lift. By overlaying the planks, a smooth surface without any dangerous seesaw effects is obtained. The steel cap embedded in the wooden planks means that the overlaying of decks has been optimised in the simplest possible manner. After all, every single tripping hazard is one too many. User safety is often just a question of paying attention to details!

### IMMENSE RIGIDITY

The high rigidity of the SUPER 65/100 scaffolding system reduces the number of anchorage points to a minimum. So here, too, you can benefit from material, transport and wage cost savings.



# ECONOMIC, SAFE, SUSTAINABLE?

PICK ANY THREE, THEN JUST ADD CLEVER!



## COMBINABLE ADVANTAGES: MODULAR AND FAÇADE SCAFFOLDING

scafom-rux products are available in metric dimensions – something that cannot be said often enough. It is therefore very simple to combine the modular scaffolding RINGSCAFF with the façade scaffolding system SUPER. Passageway tunnels for pedestrians can be optimally built with RINGSCAFF for instance. Working scaffolds rising above this are then created with SUPER material – the bay lengths are identical. In this way, each system can make full use of its particular strengths.

## COMPREHENSIVE OPTIONS


The large selection of brackets, transoms and accessories ensures a perfect fit of the scaffolding to the architecture of the building. It is particularly in the case of industrial applications, where great flexibility is required (e.g. the scaffolding of winding towers, conveyor bridges or pipelines), that the system offers all possible options, thereby enhancing productivity on the building site.



*Projecting catching structures like this one can be easily created with SUPER bracket solutions: without any improvisation and with full system integrity!*

## ENORMOUS PRODUCT DEPTH

It is not for good reason that the SUPER system is considered to be one of the best developed façade scaffolds. There are many cleverly-designed special parts that are perfectly tailored to meet the users' needs without unnecessarily extending and inflating the system. After all, thanks to the intensive exchange with our customers, we know what is needed on the market.

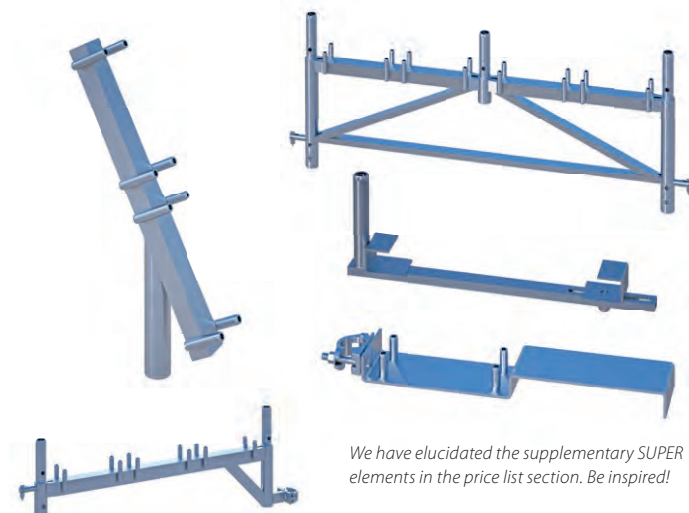

*We have elucidated the supplementary SUPER elements in the price list section. Be inspired!*





*Naturally, for a secure load we also have the right equipment available. Collapsible stacking pallets, frame stands, belts, etc. Just take a look at our accessories brochure!*



### IDEAL DIMENSIONS

The optimised dimensions of the system even ensure material savings when brackets are used. In other words, it is no longer necessary to use gap covers when RUX standard brackets are used.

### INTELLIGENT LOGISTICS

It might seem astonishing at first sight, but more than 90 % of the work of a scaffolder can be attributed to transporting material. So anyone talking about scaffolding efficiency is mainly concerned with the whole issue of logistics. The optimised product design of the SUPER system allows users the possibility of extending their loading capacity by up to 30 %. Three vertical frames can be set down next to each other on a loading platform.

One glance at the illustration will show you how a standard truck can be loaded with the modern RUX SUPER 65 façade scaffolding system. This means that many unnecessary journeys between the storage depot and the building site can be saved. Anyone counting on efficiency will come to count on scafom-rux.

### CLEVER SUSTAINABILITY

scafom-rux is a developer! However, we just do not start producing, but instead follow a guiding line that is determined by our product developers. Catchword: multiple use! When decks, simply in stock and therefore available, can be used for our building site protection system SCAFFPLANK or the MULTI-ROOF components can also be used as a pedestrian bridging system, the investments of our users simply have an added value.

### ABSOLUTE ADDED VALUE

All these points together explain well why the SUPER façade scaffolding system is one of the most stable-value products on the market. You will be investing in a proven, consistently further developed product with RUX SUPER scaffolding and thereby in a sustainable system for the future and one which will have paid for itself within a short time. And by the way: you will also have our unbeatable service as an add-on.



# SIMPLY CHANGE THE LEVEL

NO PROBLEM WITH THE ALUMINIUM PLATFORM STAIRWAY!

*Changing levels in a scaffolding is challenging enough even without any load – the air astonishingly gets very thin very quickly. And with tools or building materials in the hand, it can become a balancing act when ladder frames are used. Solution: stairs! The aluminium platform stairway can be fitted together with SUPER stairway standards as a slim, front-mounted structure for SUPER scaffolding.*

## PERFECTLY INTEGRATED

By using the appropriate stairway standards, you do not need the usual gap coverings as with the SUPER 65 vertical frame. The stair tower gets as close as possible to the façade scaffolding without any over-large gaps emerging as a result of double standards for example – perfect system integration. The trick: it does not matter at all whether you fit the stair tower directly when erecting the façade scaffolding or subsequently.

## SUSTAINABLE DESIGN


The aluminium stairway is equipped for the SUPER pins as standard, but can be quickly converted for tube hook-up by changing the head section. The inner and outer handrails can be fitted quite simply anyway in modular scaffolds. This means that you do not need to keep any additional stairs in stock when using SUPER façade scaffolding parallel to RINGSCAFF modular systems. Once again: multiple uses for lean stock management.

FULL SYSTEM INTEGRATION

USEFUL ACCESSORIES

PRACTICAL MULTIPLE USES


MATERIAL, WORK AND TIME  
SAVINGS

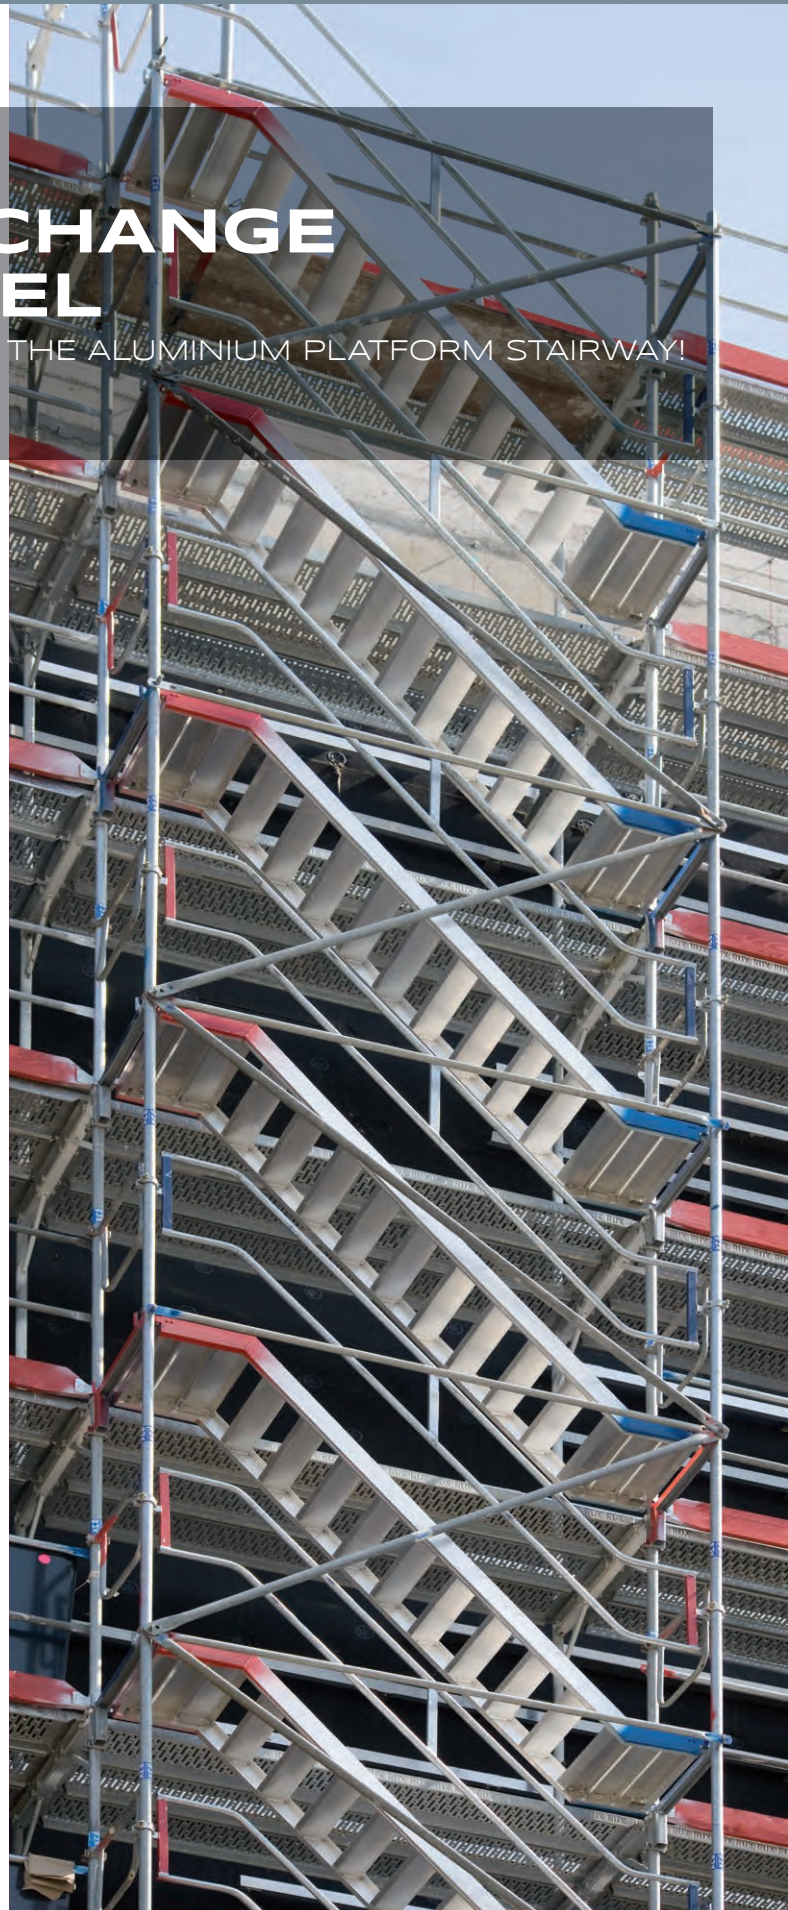





The aluminium stairway cannot only be used with SUPER scaffolding but also with modular scaffolds like RINGSCAFF and other compatible models thanks to the exchangeable head section for tube hook-up – including handrails!

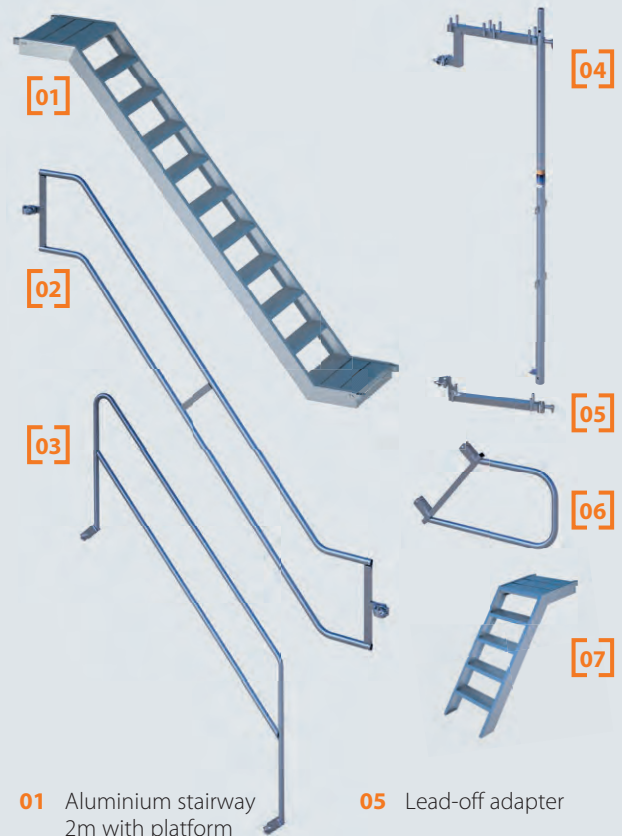

EVERYTHING THAT  
**PEOPLE ON THE UP**  
NEED

**01** Aluminium stairway  
2m with platform

**02** Outer handrail

**03** Inner handrail


**04** Stairway standard


**05** Lead-off adapter

**06** Stair guardrail

**07** Aluminium stairway  
1m with platform

**08** Access barrier

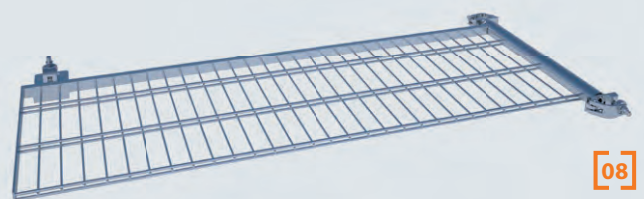

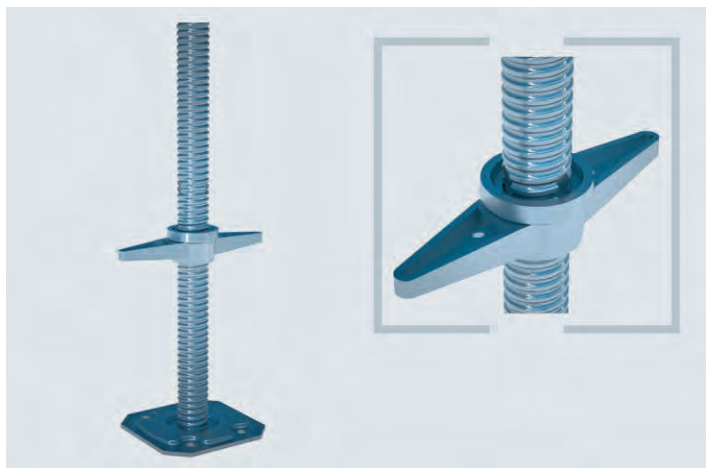


#### Base jack Ø 38 mm

To compensate for uneven surfaces and to enable perpendicular/horizontal scaffold assembly. Depending on the position of the wing nut, the load-bearing capacity can be as much as 50 kN. High-speed thread for continuous adjustment. Comes with wing nut for simple height adjustment even under load conditions. The thread is notched 150 mm below its upper edge to secure the wing nut. Please ensure when fitting that the overlap length between the standard and the spindle is 25 % of the spindle length and is at least 150 mm.

H/L x B (m)	kg	Pack	Part No.	for order volume of: €/each		
0.30	2.40	330	00357	1: 14.35	50: 10.10	250: 8.95
0.50	3.20	250	00358	1: 16.10	50: 10.50	250: 9.65
0.60	3.90	300	08358	1: 16.55	50: 10.60	250: 9.95
0.78	4.20	250	00360	1: 21.25	50: 13.80	200: 12.65
1.00	4.70	200	00365	1: 27.20	50: 17.40	200: 15.50

SNP

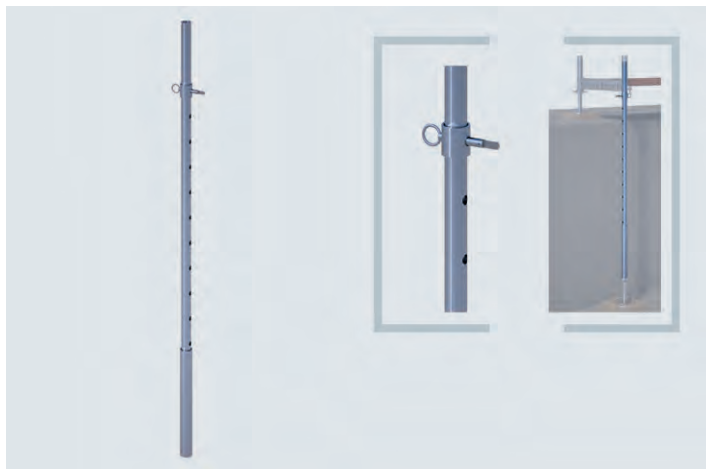

#### Spacer tube complete with sleeve and pin

Suitable when the base jack is no longer adequate for compensating for very uneven surfaces or in the case of cellar stairways etc. It is used as an extension for the base jack in combination with the decking transom. Significant adjustment range of 1.00 m at 10 cm intervals.

H/L x B (m)	kg	Pack	Part No.	for order volume of: €/each		
1.80	6.40	50	00668	1: 53.50	10: 38.60	20: 34.40

SNP




#### Underlay pad for base jack

Fitted with reflectors, out of plastic material.

B: 0.265 m x L: 0.235 m x H: 0.01 m

Info	kg	Pack	Part No.	for order volume of: €/each		
	0.20	80	05632	1: 3.40	10: 2.45	50: 2.10

SNP

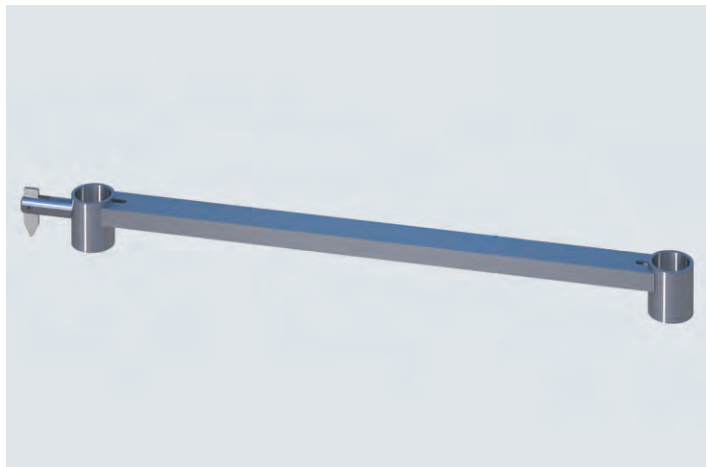


#### Base transom

For the lower diagonal attachment at the foot of the scaffolding. It is slid over the base jacks and thereby aligns them precisely to the width of the scaffolding, similar to an assembly aid.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	0.65	1.50	100	00662	17.50
	1.00	2.00	100	00664	19.90




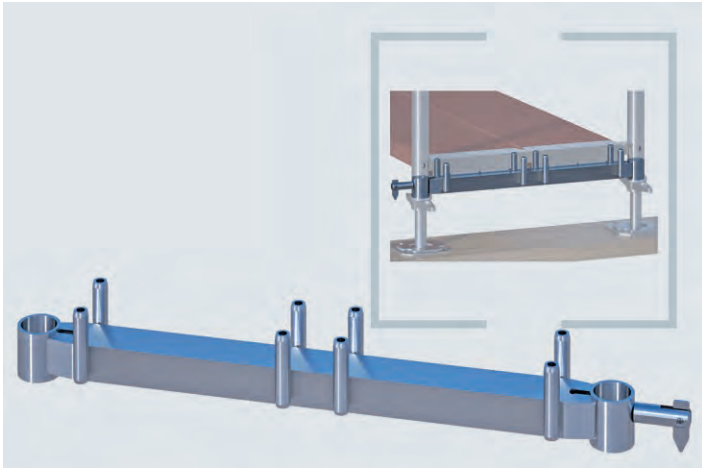

#### Decking transom

For use in the ascent bay or in combination with spacer tubes. Suitable for assembling the lowermost scaffold level when compensating for very uneven surfaces or in the case of e.g. cellar stairways. Comes with gravity lock for the attachment of the diagonals.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	0.65	3.00	100	00670	34.50
	1.00	4.50	75	00672	46.70

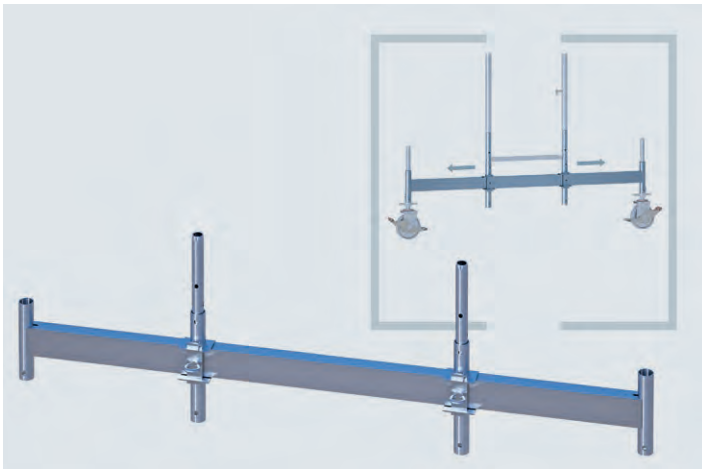

#### Universal mobile beam

Makes a mobile working scaffold out of almost every façade or modular scaffolding. Popular element in every scaffolder's portfolio. No additional investments in a mobile scaffold system necessary. Can be used universally thanks to adjustable tube connectors. Possible to combine with all RUX castors

H/L x B (m)	kg	Pack	Part No.	for order volume of: €/each		
2.00	23.20	1	05505	1: 199.00	4: 169.00	8: 158.00

SNP



#### Castor 10.0 kN


For mobile scaffold structures of all types. Height adjustable for perpendicular alignment. Locking brake for a secure stand and to protect against any unintentional rolling away. Centric transfer of load when brake is engaged. Little effort needed when moving the system thanks to integrated slide bearings and nylon wheel to safeguard the supporting surface. Also equipped with a foot lever for releasing the brake. Suitable for both indoor and outdoor applications: EN 1004.

Wheel Ø: 200 mm. Installation height: 241 mm plus spindle 500 mm. Brake position: 1,000 kg. Travel load approx. 400 kg (on level surface).

Info	kg	Pack	Part No.	for order volume of: €/each		
10.0 kN	6.00	72	05507	1: 84.00	8: 61.00	24: 49.50

SNP



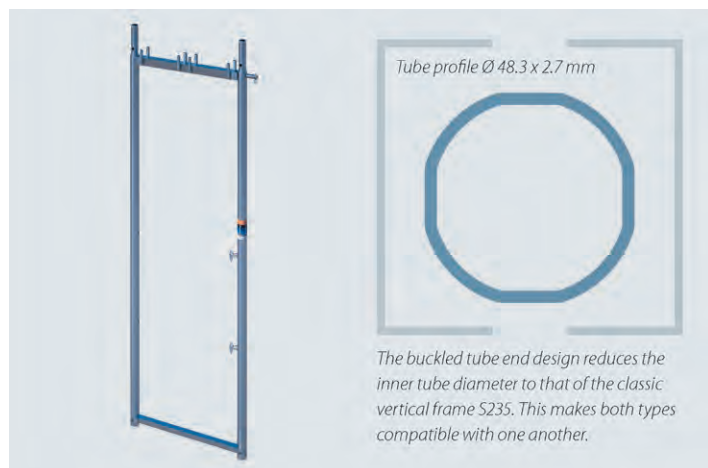

#### Vertical steel frame SUPER 65 ULTRA

Tube profile Ø 48.3 x 2.7 mm.

The classic basic element of the SUPER 65 façade scaffolding. Comes with pins to take up two decks with a width of 0.29 m. The base transom with T profile serves as a deck retainer and additionally for the take-up of horizontal loads. Comes with three gravity locks for the screw-free attachment of back guardrails and diagonals. Drilled at top and bottom to enable interconnection.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	0.50 x 0.65	7.50	25	01525U	<b>72.00</b>
	1.00 x 0.65	10.50	25	01526U	<b>78.00</b>
	1.50 x 0.65	15.30	25	01531U	<b>84.00</b> ①
	2.00 x 0.65	16.50	25	01538U	<b>88.80</b>

Embossing possible



#### Vertical steel frame SUPER 65

Tube profile Ø 48.3 x 3.2 mm.

The classic basic element of the SUPER 65 façade scaffolding. Comes with pins for the fitting of two decks with a width of 0.29 m. The base transom with T profile serves as a deck retainer and additionally for the take-up of horizontal loads. Comes with three gravity locks for the screw-free attachment of back guardrails and diagonals. Drilled at top and bottom to enable interconnection.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	0.50 x 0.65	8.40	25	01525	<b>72.00</b> ①
	1.00 x 0.65	12.00	25	01526	<b>78.00</b> ①
	1.50 x 0.65	15.40	25	01531	<b>84.00</b> ①
	2.00 x 0.65	19.00	25	01538	<b>88.80</b> ①

Embossing possible



#### Vertical steel frame SUPER 100

Fundamental supporting element of the SUPER 100 façade scaffolding.

Designed for three decks with a width of 0.29 m. Depending on the type of deck and the bay length, suitable for scaffolds up to group IV. Comes with five gravity locks for the screw-free attachment of back guardrails and diagonals. The base transom with T profile serves as a deck retainer and provides for horizontal stability.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	0.50 x 1.00	11.20	25	01550	<b>89.00</b>
	1.00 x 1.00	15.40	25	01551	<b>93.50</b>
	1.50 x 1.00	20.60	25	01579	<b>105.00</b> ①
	2.00 x 1.00	23.50	25	01554	<b>111.80</b>

Embossing possible



#### Vertical aluminium frame SUPER 65

Completely out of aluminium and technically designed like the steel frame, but more than 50 % lighter. Suitable for long transport distances and for various other ancillary construction trades.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	1.00 x 0.65	5.50	25	01530	<b>108.80</b> ②
	2.00 x 0.65	9.00	25	01524	<b>136.30</b> ②


Embossing possible

**Vertical aluminium frame SUPER 100**

Completely out of aluminium and technically designed like the steel frame, but more than 50 % lighter. Suitable for long transport distances and for various other ancillary construction trades.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	2.00 x 1.00	10.69	25	01539	198.50 ①


Embossing possible

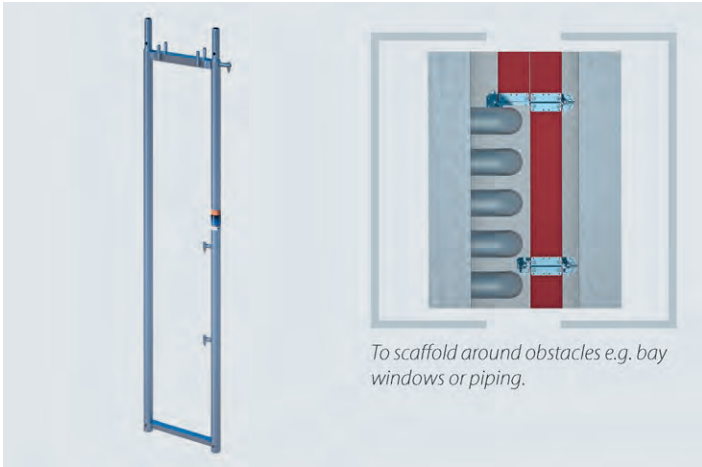**Vertical steel frame, single deck**

Vertical frame for a single deck. Should not be missing from any scaffold portfolio. The economic system solution for building around obstacles. Comes with five gravity locks for the screw-free attachment of back guardrails and diagonals.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	2.00 x 0.40	16.00	25	01535	92.40

Embossing possible

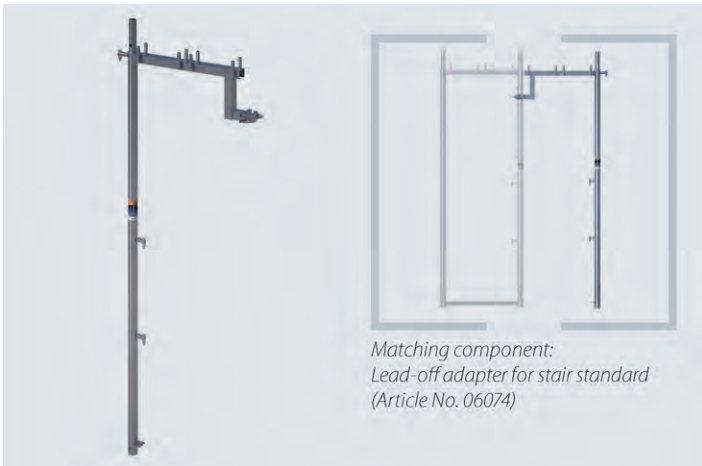
**Stairway standard**

The simple and flexible solution for the outer stairway ascent in combination with the aluminium stairway with platform.

Much reduced gap between the stairway platform and the scaffold decking, less space needed and considerable material savings are the main advantages compared with a stair tower with vertical frames. Also suitable for scaffold bays in façade recesses on passage frames. Stair exit possible over front-mounted bracket.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
AF 19	2.00 x 0.65	11.60		06075_19	106.80
AF 22	2.00 x 0.65	11.60		06075_22	106.80


Matching component:  
Lead-off adapter for stair standard  
(Article No. 06074)

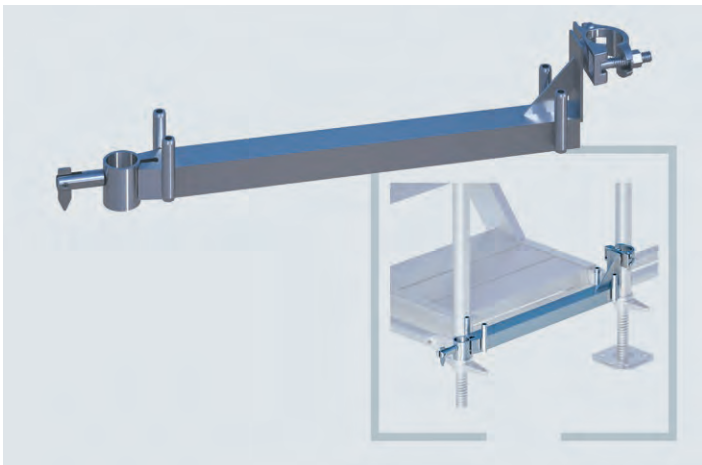**Lead-off adapter for stairway standard**

2 pieces are necessary. Suitable for the assembly of stairway standards (Art. No. 06075) as a starter transom for the attachment of the first aluminium platform stairway (Art. No. 01039).

Info	H/L x B (m)	kg	Pack	Part No.	€/each
AF 19	0.65	3.20		06074_19	62.40
AF 22	0.65	3.20		06074_22	62.40



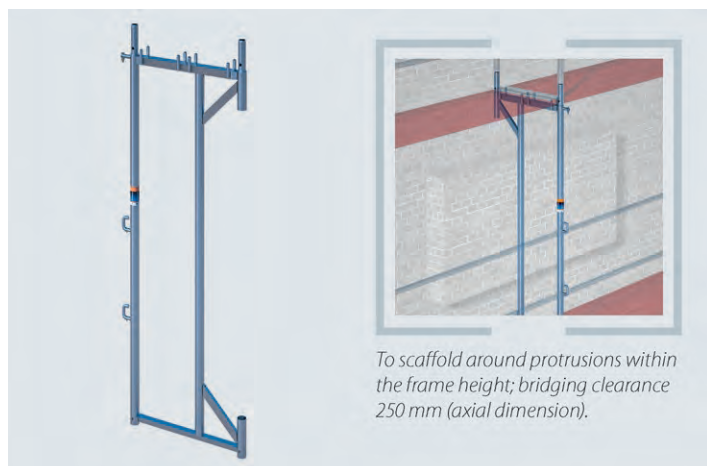


#### Vertical steel frame SUPER 65 for roof protrusions

For the simple scaffolding of roof protrusions and ledges.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	2.00 x 0.65	21.60	25	01539	140.00
	2.00 x 1.00	24.47	25	01510	175.90

Embossing possible

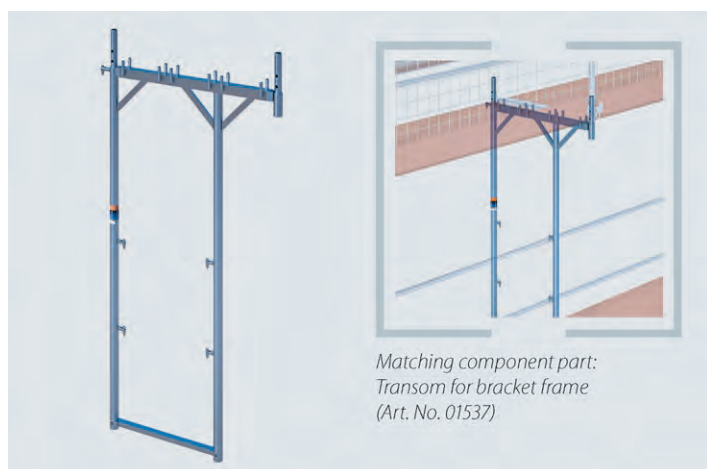


#### Steel bracket frame SUPER 65/100

The versatile one: for the horizontal offsetting of individual scaffold bays or entire levels by one deck width, for the combination of SUPER 65 and SUPER 100 or for use in roof safety systems.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	2.00 x 1.00	23.90	25	01536	141.00


Embossing possible

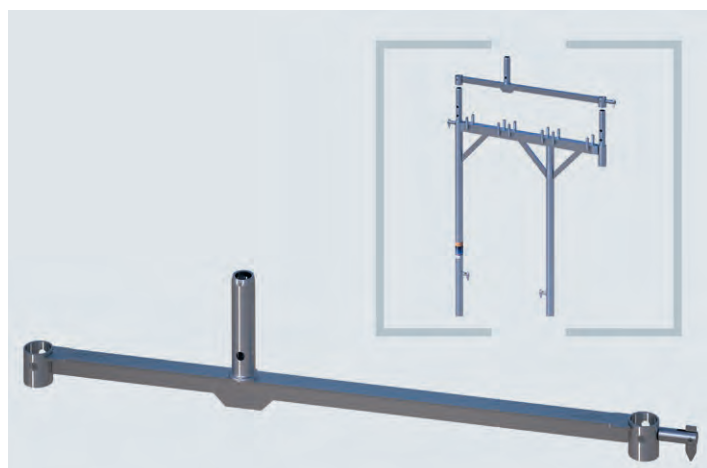

#### Transom for bracket frame

The transom is fitted to the bracket frame or SUPER 100 vertical frame. It serves as a deck retainer and with its tube connector is suitable for the attachment of SUPER 65 vertical frames.


Info	H/L x B (m)	kg	Pack	Part No.	€/each
	1.00	2.50		01537	58.30

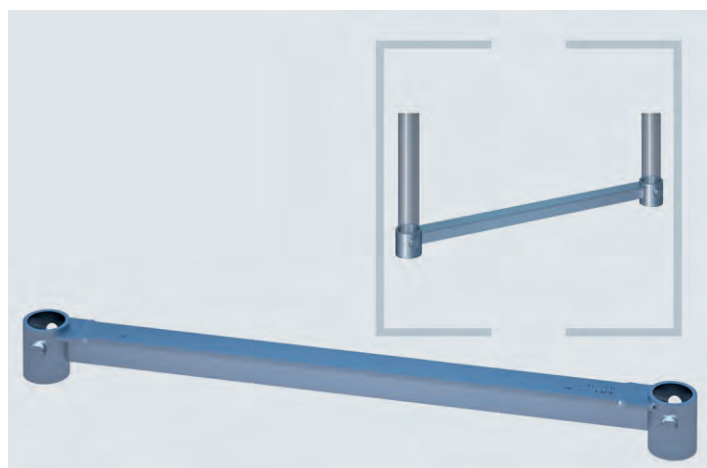

#### Repair transom for vertical frame


A substitute for the missing T-profile below. The repair transom is simply inserted and affixed using the machine bolts supplied (wrench size 19). By fitting the repair transom, the open vertical frame regains its full statical values. This option provides decisive benefits for facade and industrial scaffolding.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	0.65	1.50		01540	22.90
	1.00	2.00		01555	26.90

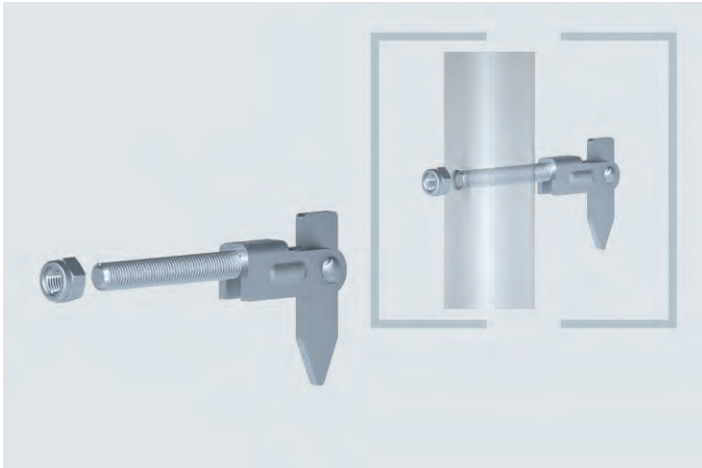**Principal guardrail gravity lock**

For vertical frames, screw-attachment, galvanised.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	0.11	0.10	200	00549	3.60

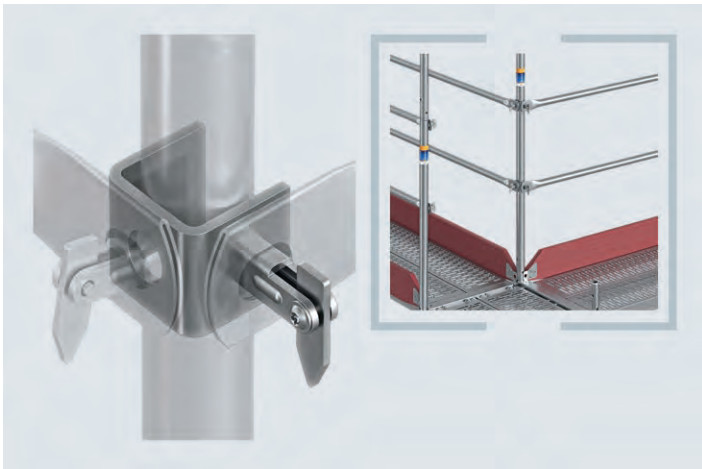**Corner gravity lock**

For mounting additional guardrails on angled scaffolding. Easy to slide over the existing gravity lock.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
		0.34		07444	13.80

**Inner guardrail holder for vertical frames**

Comes with two gravity locks for attaching back guardrails as inner protection.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	0.56 x 0.06	2.40		07135	37.40



Also fits to various Plettac and Hünnebeck systems.

### Diagonals

Steel tube Ø 48,3 mm. Ensures the stability of the scaffolding in the horizontal direction. Screw-free fitting. The attachment using the upper gravity lock on the vertical frame is at the same time the fixed point that allows for perpendicular assembly from the second level on without the need for a spirit level. Can be used in all scaffolding systems with logical modular dimensions and diagonal gravity locks positioned outside. Thanks to the third hole, suspended scaffolds or bridging can be implemented together with overhead transoms or gravity lock couplers.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
Bay 1.50 m	2.50	7.60	50	00605	<b>30.60</b>
Bay 2.50 x 1.00 m	2.70	9.00	50	00606	<b>32.00</b>
Bay 2.00 m	2.80	7.80	50	00607	<b>33.40</b>
Bay 2.50 m	3.20	8.80	50	00610	<b>35.70</b>
Bay 3.00 m	3.60	9.80	50	00611	<b>39.50</b>

### Primary guardrail RS with slotted holes

With slotted holes for fitting using gravity locks. Suitable for all scaffolding systems with logical grid dimensions and gravity locks for guardrails.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
Tube Ø 38 mm	0.65	1.20	100	E04AG0089	<b>14.90</b>
Tube Ø 38 mm	1.00	2.00	100	E04AG0020	<b>15.90</b>
Tube Ø 38 mm	1.50	2.70	100	E04AG0019	<b>16.90</b>
Tube Ø 38 mm	2.00	3.60	100	E04AG0018	<b>17.90</b>
Tube Ø 38 mm	2.50	4.40	100	E04AG0010	<b>19.90</b>
Tube Ø 38 mm	3.00	5.00	100	E04AG0017	<b>21.90</b>
Tube Ø 42.4 mm	4.00	11.10	100	E04AG0090	<b>43.00</b>

### MSG guardrail posts standard for advanced assembly guardrail

For use with MSG aluminium guardrails. No setting down or rehanging of components necessary, instead offset coupling. Tool-free continuous side protection for bay lengths of 2.50 or 3.00 m can be realised.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
RX	2.20	10.00	10	05522	<b>31.00</b>
PC	2.20	10.00	10	05523	<b>31.00</b>

NEW

Passendes Bauteil:  
 MSG-Telegeländer  
 (Art.-Nr. 05514)

Matching components:  
Guardrail post for assembly guardrail  
(Article No. 05522)  
Universal guardrail post  
(Article No. 05538)



#### MSG aluminium assembly guardrail, telescopic

Is mounted in advance together with the assembly railing post. Adjustment range from 2.50 m to 3.07 m. The integrated roller system reduces resistance to a minimum during advanced guardrail assembly.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	3.40	3.30		05514	87.90

NEW


#### MSG guardrail posts with semi-coupler

Made of steel. Remains in the scaffold without modification until scaffold dismantling. After assembly, it is no longer possible to remove the guardrail without tools. The so-called double post can be used on the inner as well as on the outer and front side of the scaffold. The component remains in the scaffold and is thus proof of performance for the assembly carried out in accordance with TRBS 2121. It is combined with standard SUPER primary guardrails.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
Initial starter section	0.30	1.87	10	05539	11.70
	2.00	6.30		05537	41.50

NEW

Matching component:  
MSG telescopic guardrail  
(Article No. 05514)

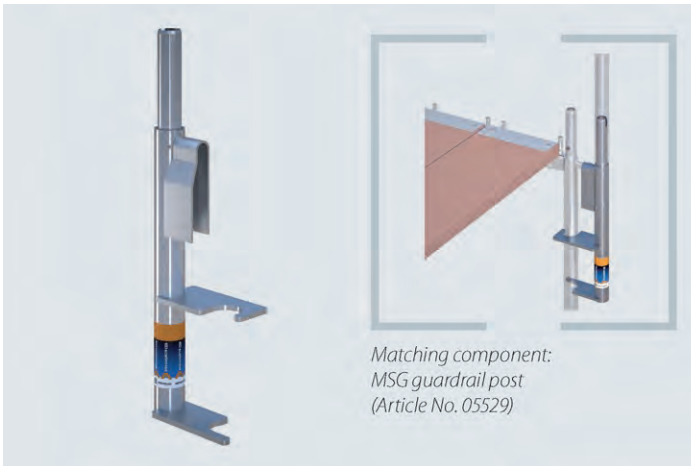

Matching component:  
MSG guardrail post  
(Article No. 05529)

#### MSG bracket out of aluminium for advanced assembly guardrail

The MSG bracket is hooked in without tools using the gravity pin on the SUPER frame and optionally supplemented by standard guardrail posts or MSG aluminium posts.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	2.20	1.47		05528	45.80

NEW

#### MSG guardrail posts out of aluminium for MSG bracket

The MSG guardrail post is mounted on the MSG bracket without tools. Optionally, primary guardrails from stock can be used. With this solution, all bay lengths can be realised.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	2.20	1.81		05529	39.50

NEW

Matching components:  
MSG bracket (Article No. 05528)  
MSG telescopic guardrail  
(Article No. 05514)





#### Front guardrail 0,30 m single-plank, double

For the multi-piece side protection at the front of the scaffolding. One side is slid over the gravity lock on the vertical frame, the other side is firmly fastened with the integrated semi-coupler.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
AF 19	0.30	2.60	25	01542_19	26.50
AF 22	0.30	2.60	25	01542_22	26.50




#### Front guardrail, double

For multi-part side protection on the front end of the scaffold. One side is slipped over the gravity lock of the vertical frame, the other side is screwed tight with the integrated semi-coupler.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
650/667	0.65 x 0.67	3.96	25	E04AG0068	31.30
1000	1.00	4.86	25	E04AG0070	33.80

Please state AF

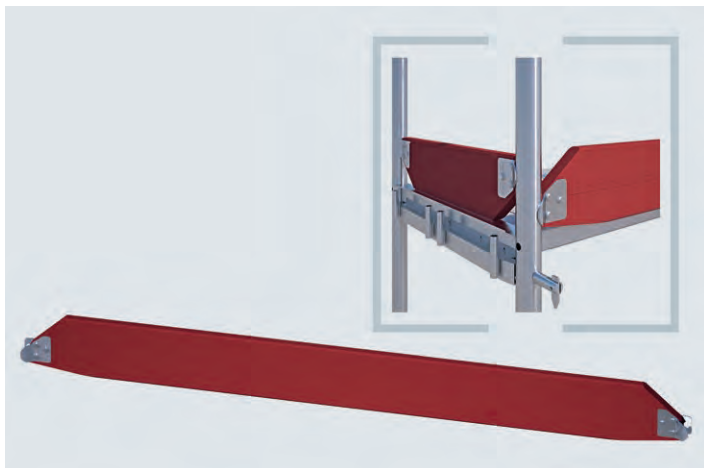

#### Toe board

Component of the three-part side protection. Prevents objects or persons from unintentionally falling from the scaffold. It is fitted parallel to the decking or inserted between the vertical frames at the front end. Impregnated wood with exchangeable metal fittings.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	0.65 x 0.15	2.00	84	01058	19.10
	1.00 x 0.15	2.50	84	01059	20.50
	1.50 x 0.17	3.80	84	01061	22.40
	2.00 x 0.17	5.00	84	01062	24.60
	2.50 x 0.17	6.30	84	01063	26.40
	3.00 x 0.17	7.30	84	01064	29.20
	4.00 x 0.17	10.00	84	01065	46.80

Embossing possible

### SMART DETAILS



**Individualisation** – Simply pick the RAL colour that best suits your company.




**Imprint** – Ensure promotional impact by imprinting your logo, telephone number, website or other advertising texts.



**Stickers** – That something special! There is almost no limit to the message you can get across. The dimensions of the stickers can be individually determined.

**We would be delighted to make you an individual offer in this respect!**

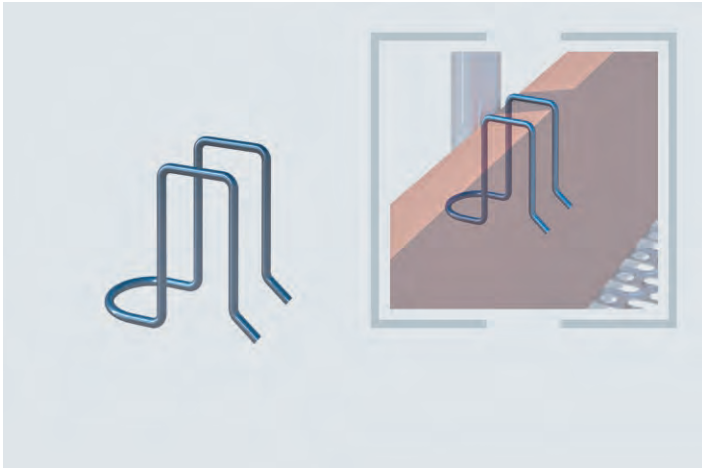
**Toe board clamp**

Robust steel wire, hot-galvanised, for holding the toe boards in tube and coupler scaffolds as well as for attaching scaffold boards in protective scaffolds (safety barrier for roofers).

H/L x B (m)	kg	Pack	Part No.	for order volume of: €/each			
1.35	0.10	100	00376	1:	<b>1.86</b>	100:	<b>1.68</b>   500: <b>1.49</b>

SNP




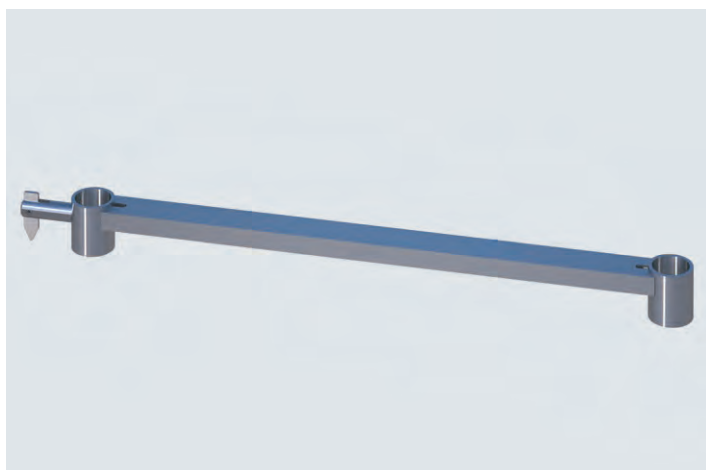

#### Base transom

For the lower diagonal attachment at the foot of the scaffolding. It is slid over the base jacks and thereby aligns them precisely to the width of the scaffolding, similar to an assembly aid.


Info	H/L x B (m)	kg	Pack	Part No.	€/each
	0.65	1.50	100	00662	17.50
	1.00	2.00	100	00664	19.90

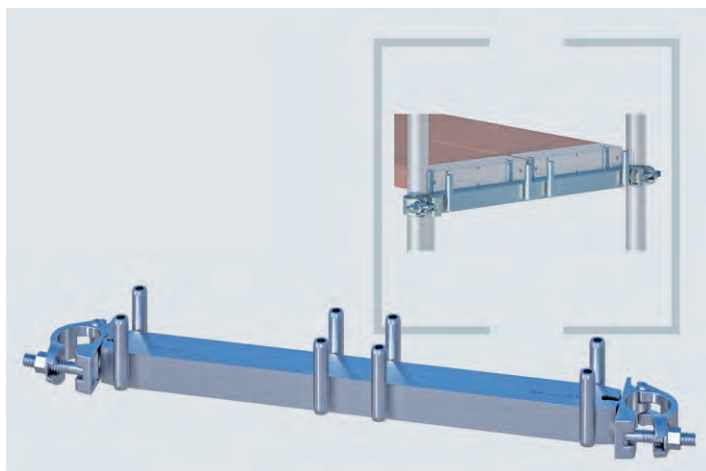

#### Intermediate transom

For intermediate decked levels e.g. in the case of scaffold offsets in the longitudinal direction. Continuous height adjustment thanks to the welded-on scaffold couplers. Available for two or three plank-decking. Also suitable for bridging together with lattice girders.


Info	H/L x B (m)	kg	Pack	Part No.	€/each
AF 19	0.65	3.50	50	00681_19	43.50
AF 22	0.65	3.50	50	00681_22	43.50
AF 19	1.00	5.20	50	00682_19	57.00
AF 22	1.00	5.20	50	00682_22	57.00

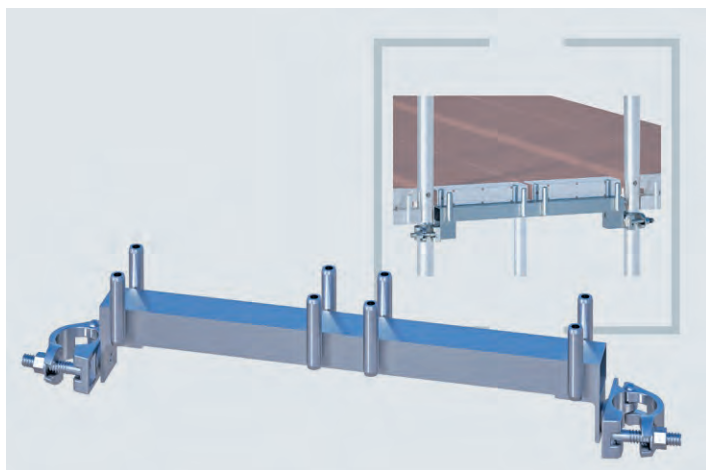

#### Platform transom

For the assembly of large-sized scaffold platforms or birdcage scaffolds out of individual scaffold sections of any length and width. Affixed between two vertical frames by means of scaffold couplers, it extends the working area modularly by either two or three deck widths. Can also be used as an intermediate transom.


Info	H/L x B (m)	kg	Pack	Part No.	€/each
AF 19	0.65	4.10		07101_19	49.20
AF 22	0.65	4.10		07101_22	49.20
AF 19	1.00	5.40		07102_19	62.70
AF 22	1.00	5.40		07102_22	62.70

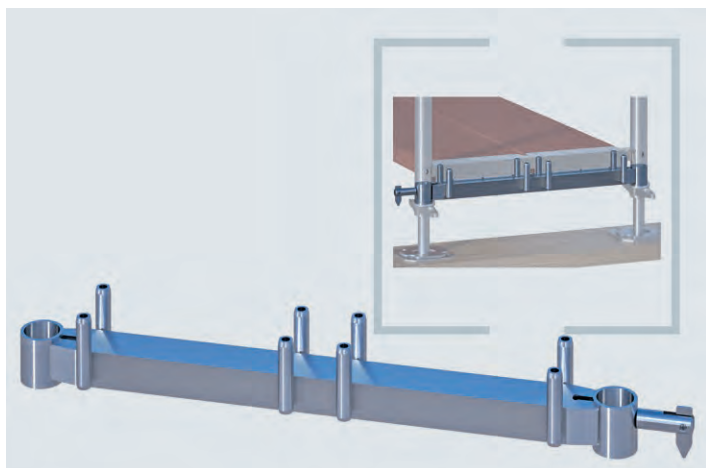

#### Decking transom


For use in the ascent bay or in combination with spacer tubes. Suitable for assembling the lowermost scaffold level when compensating for very uneven surfaces or in the case of e.g. cellar stairways. Comes with gravity lock for the attachment of the diagonals.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	0.65	3.00	100	00670	34.50
	1.00	4.50	75	00672	46.70

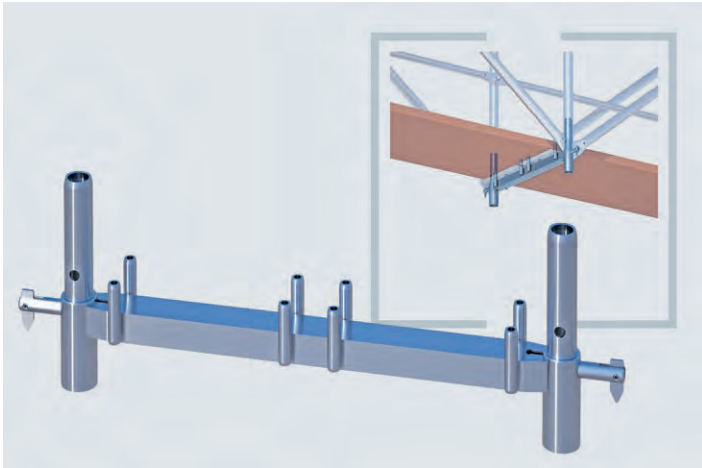**Overhead transom**


For 2 or 3 decks. Is used together with diagonals. Enables bridging over a span width of up to 6.00 m e.g. for gate entrances and crossings with public traffic. Can also be used for front-end scaffold extensions up to 3.00 m.

Info	H/L x B (m)	kg	Pack	Part No.	€/each	
	0.65	4.00	50	00684	49.00	①
	1.00	6.00	50	00685	59.00	①

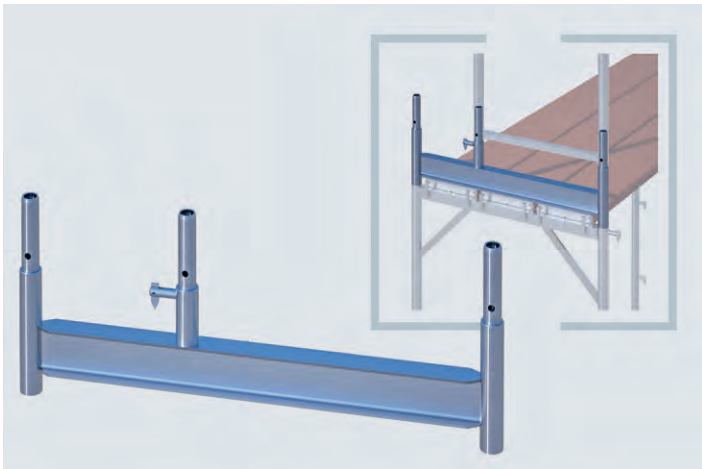**Crossover transom**


For the changeover from SUPER 100 to SUPER 65. Allows individual modification of the scaffolding to fit the building structure.

Info	H/L x B (m)	kg	Pack	Part No.	€/each	
	1.00	13.50	10	00600	126.00	①

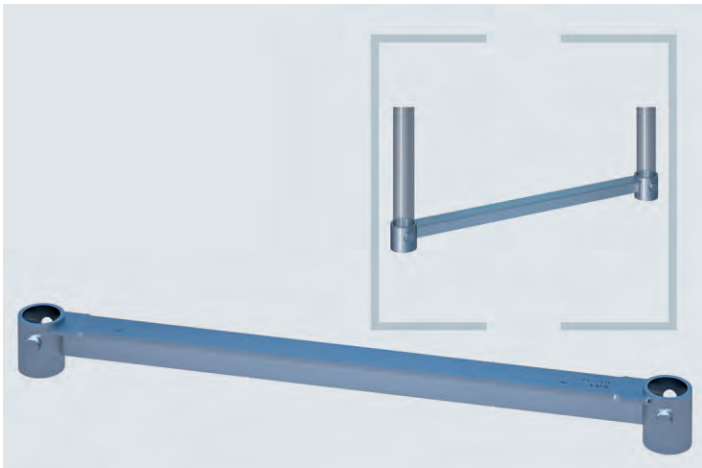**Repair transom for vertical frame**

A substitute for the missing T-profile below. The repair transom is simply inserted and affixed using the machine bolts supplied (wrench size 19). By fitting the repair transom, the open vertical frame regains its full statical values.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	0.65	1.50		01540	22.90
	1.00	2.00		01555	26.90

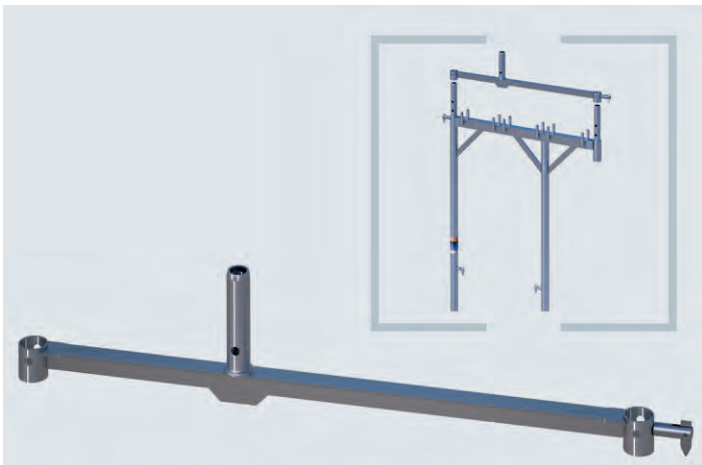**Transom for bracket frame**

The transom is fitted to the bracket frame or SUPER 100 vertical frame. It serves as a deck retainer and with its tube connector is suitable for the attachment of SUPER 65 vertical frames.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	1.00	2.50		01537	58.30



Matching component part:  
 Passage frame standard (Art. No. 00624,  
 2 pieces for each connector)



#### Passage frame connector

Enables safe and smooth-flowing public traffic below the scaffolding and ensures more or less unrestricted access to the entrances of buildings or businesses and free views of the shop windows. Large dimensions of 1.35 m (= 4 deck widths) or 1.65 m (= 5 deck widths) to even handle high numbers of pedestrians. Normal fitting (as standard) on two passage frames standards.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	1.35	14.20	15	00627	159.00

#### Passage frame connector

Enables safe and smooth-flowing public traffic below the scaffolding and ensures more or less unrestricted access to the entrances of buildings or businesses and free views of the shop windows. Large dimensions of 1.35 m (= 4 deck widths) or 1.65 m (= 5 deck widths) to even handle high numbers of pedestrians. Normal fitting (as standard) on two passage frames standards.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	1.65	17.60	15	00630	186.00

#### Passage frame standard

Each comes with 2 machine bolts M12 x 65, suitable for passage frame connector.


2 pieces are necessary for each connector.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	2.00	8.20	50	00624	47.50

#### System girder


Applications e.g. pedestrian tunnels. Width and position of the scaffold structure variable. Decks can be fitted to upper or lower chord. Enhanced safety for pedestrians thanks to second decking level. Possible to use as a system girder in metric dimension. Widths: 1.50 m and 2.00 m. Variable lengths for rising frame or modular scaffolding – 07 dimension also possible.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	1.50 x 0.50	17.60	10	E04RS1223	140.50 ②
	2.00 x 0.50	24.80	10	E04RS1224	175.90 ②

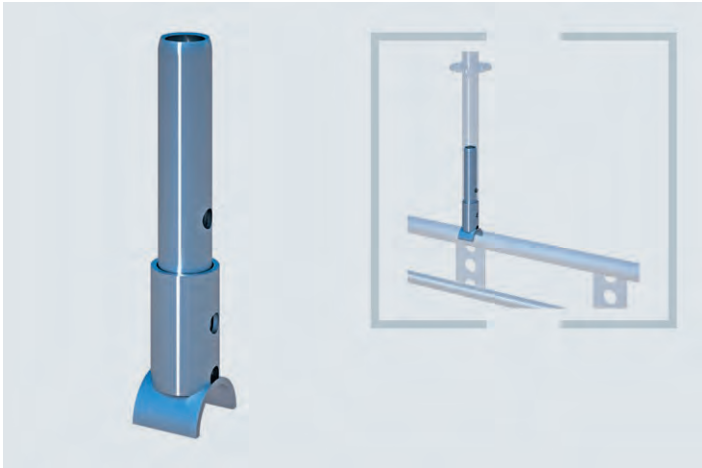**Tube connector, universal**

With semi-round hook-up support. Used for double ledgers, system girders or lattice girders.


Info	kg	Pack	Part No.	for order volume of: €/each		
	0.97	20	08005	1: 23.20	10: 19.90	20: 18.70 ①

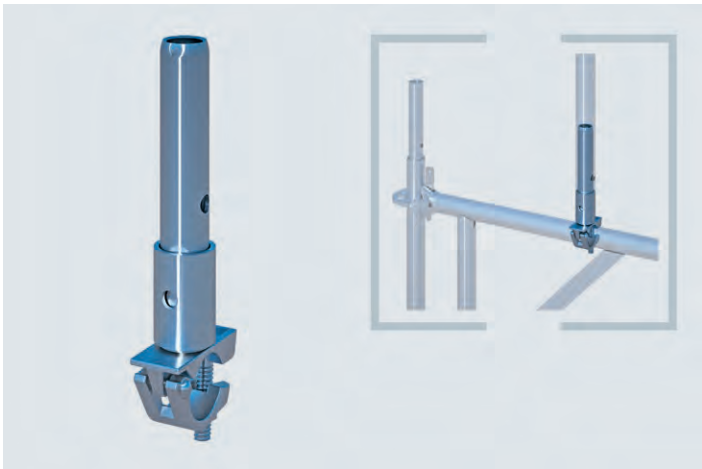**Tube connector with semi-coupler**

Universal use. To fit vertical frames, modular standards or scaffold tubes to e.g. lattice girders, triangular supports, vertically-running scaffold tubes, etc. Attached with standard scaffold coupler and connected using standardised tube supports.


Info	kg	Pack	Part No.	for order volume of: €/each		
AF 19	1.80	20	00470	1: 18.75	10: 16.10	20: 14.00
AF 22	1.80	20	00471	1: 18.75	10: 16.10	20: 14.00

SNP

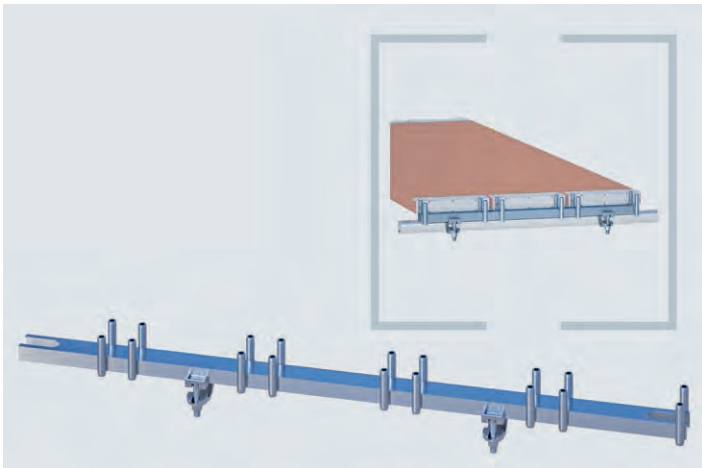**Support rail – RX metric**

For the assembly of large-sized or birdcage scaffolds in combination with SUPER decks or ladder frames. Is screw-fastened to lattice girders, tubes or modular ledgers. Enables large span widths without any inconvenient and disturbing standard structures below. Spanner width 22 (AF 22).

Info	H/L x B (m)	kg	Pack	Part No.	€/each
2 decks 0.29 m	0.65	3.70	50	00628_22	44.40 ②
3 decks 0.29 m	1.00	4.40	50	00622_22	59.70 ②
4 decks 0.29 m	1.50	6.00	50	00625_22	74.50 ②
+1 deck 0.23 m					
5 decks 0.29 m	2.00	7.60	50	00626_22	95.90 ②
+2 decks 0.23 m					
8 decks 0.29 m	2.50	9.40	50	00623_22	120.00 ②

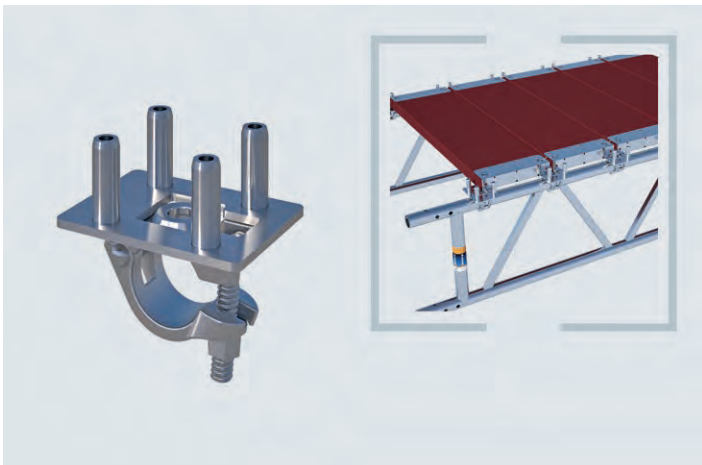
**Deck coupler with 4 pins**

Semi-coupler with 4 pins for mounting on e.g. lattice girders, ledgers or other scaffolding elements. The SUPER decks are mounted on the decking pins.

Info	kg	Pack	Part No.	for order volume of: €/each		
RX, AF 19	1.33	25	07230	1: 36.00	10: 21.40	20: 19.80
PL, AF 22	1.33	25	07231	1: 36.00	10: 21.40	20: 19.80



Incomparable stability thanks to  
 3-piece, interlocking design.

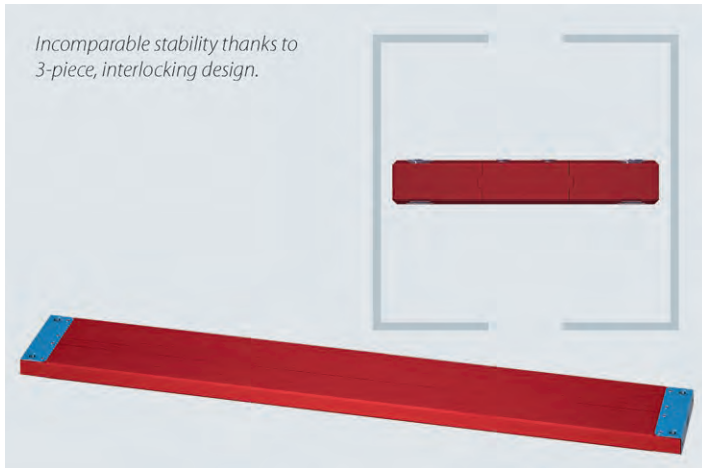

#### Wooden plank, 3-piece, interlocking and bonded

Robust and durable. Combine the features of the classic wooden plank with the benefits of the modern-day safety deck. Bonding of the individual sections – tongue and groove principle.

3.00 kN/m<sup>2</sup> load at 2.50 m length  
 2.00 kN/m<sup>2</sup> load at 3.00 m length

Info	H/L x B (m)	kg	Pack	Part No.	€/each
LC6	0.50 x 0.29	4.60	80	01136	38.30
LC6	0.65 x 0.29	5.60	80	01137	39.50
LC6	1.00 x 0.29	7.70	80	01138	47.10
LC6	1.50 x 0.29	10.80	80	01139	57.50
LC5	2.00 x 0.29	13.90	80	01140	65.50
LC4	2.50 x 0.29	16.00	80	01141	74.80
LC3	3.00 x 0.29	20.00	80	01142	85.50

#### Steel deck ULTRA

The indestructible scaffold deck. Resistant to even the very highest physical demands. The perforated surface only allows a minimum amount of building and blasting material to collect.

Hot-galvanised for long-term resistance to corrosion, optimal stackability.

4.50 kN/m<sup>2</sup> load at 2.50 m length  
 3.00 kN/m<sup>2</sup> load at 3.00 m length

Info	H/L x B (m)	kg	Pack	Part No.	€/each
LC6	0.65 x 0.29	4.00	80	04590	54.50
LC6	1.00 x 0.29	7.00	80	04591	59.50
LC6	1.50 x 0.29	10.00	80	04592	69.50
LC6	2.00 x 0.29	13.00	80	04593	79.50
LC5	2.50 x 0.29	15.70	80	04594	89.50
LC4	3.00 x 0.29	18.30	80	04595	102.50

#### Aluminium deck with aluminium head section

Extremely robust version, can be used on both sides, high load-bearing capacity and anti-slip surface, low degree of sag.

Installation height: 48 mm

6.00 kN/m<sup>2</sup> load at 2.50 m length  
 3.00 kN/m<sup>2</sup> load at 3.00 m length  
 2.00 kN/m<sup>2</sup> load at 4.00 m length

Info	H/L x B (m)	kg	Pack	Part No.	€/each
LC6	1.00 x 0.29	4.00	80	05181	74.80
LC6	1.50 x 0.29	5.80	80	05182	97.80
LC6	2.00 x 0.29	7.60	80	05183	118.20
LC6	2.50 x 0.29	9.50	80	05184	141.40
LC5	3.00 x 0.29	11.30	80	05185	158.60
LC3	4.00 x 0.29	15.00	80	05186	202.80




#### Aluminium floor panel with aluminium head section

Extremely robust version, can be used on both sides, high load-bearing capacity and anti-slip surface, low degree of sag.

Installation height: 48 mm

6.00 kN/m<sup>2</sup> load at 2.50 m length  
 3.00 kN/m<sup>2</sup> load at 3.00 m length

Info	H/L x B (m)	kg	Pack	Part No.	€/each
LC6	1.50 x 0.59	10.40	40	05110	187.30
LC6	2.00 x 0.59	13.70	40	05111	207.40
LC5	2.50 x 0.59	17.00	40	05112	230.00
LC4	3.00 x 0.59	20.30	40	05113	270.00

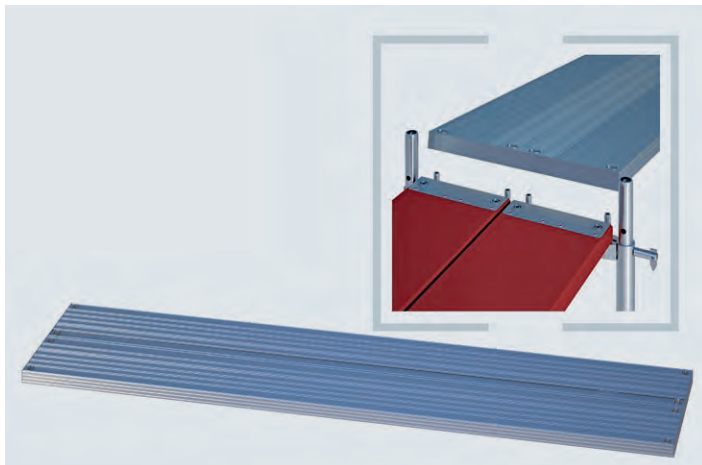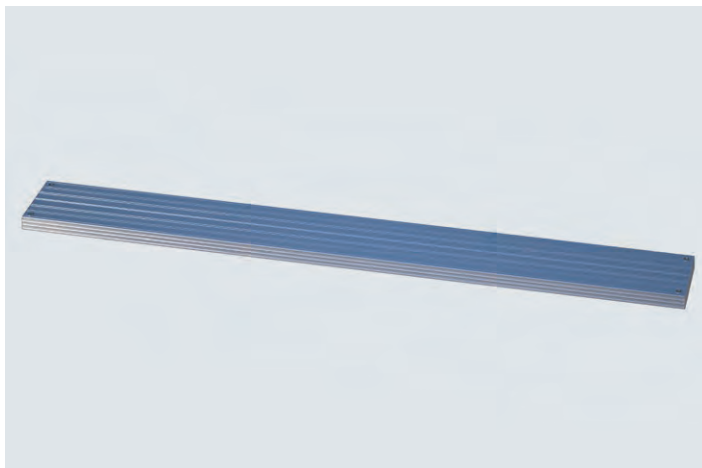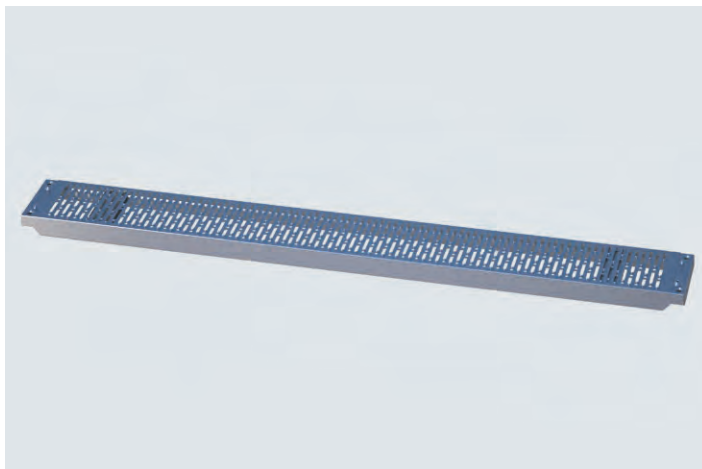

**Deck connector**


To connect 2 aluminium decks (f. 48 mm). Only necessary at 4 m.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
		0.10		04721	12.90

**Key for deck connector**


For simple fitting of the deck connector.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
		0.10		00873	16.20

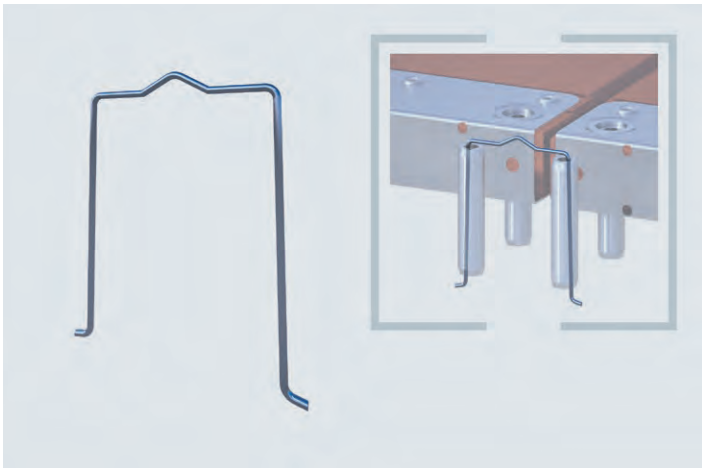**Retaining spring**

Robust spring steel wire, hot-galvanised, to secure the decks and ladder frames in the uppermost level or when cantilever brackets, coupler brackets, platform scaffolds or stair brackets are used.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
		0.01	1500	04552	0.65

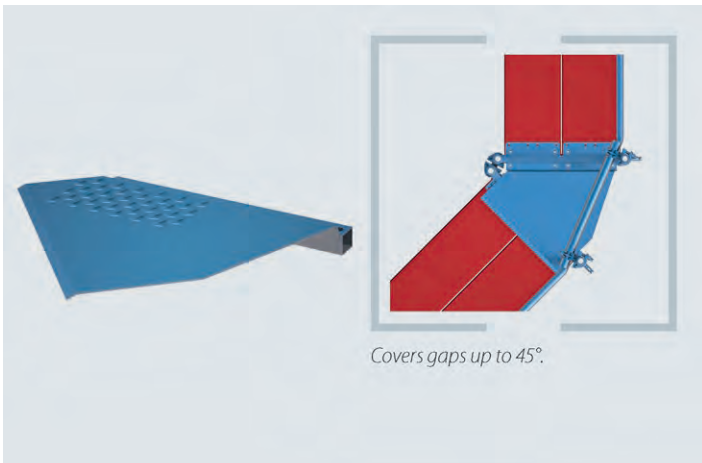
**Corner deck, flexible 2-deck**

The corner deck bridges the gap at the joint between scaffold sections not in alignment with one another (offset) – up to an angle of 45°. In this way the scaffolding can be better adapted to fit to the building structure.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	0.65	7.40	10	00678	64.80

NEW



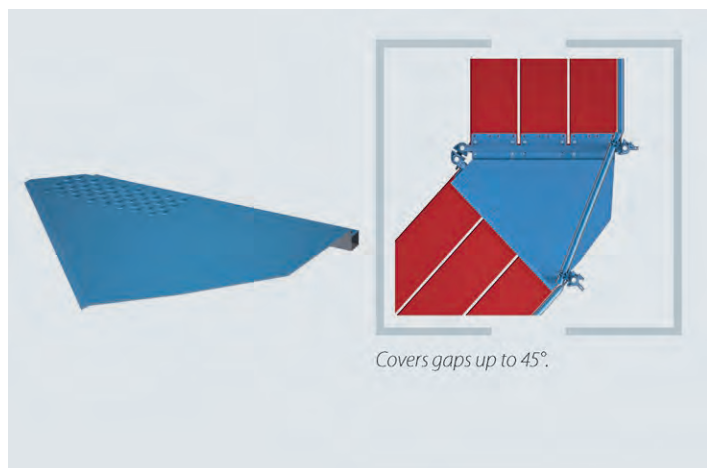


#### Corner deck, flexible 3-deck

The corner deck bridges the gap at the joint between scaffold sections not in alignment with one another (offset) – up to an angle of 45°. In this way the scaffolding can be better adapted to fit to the building structure.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	1.00	15.20	10	00679	117.60

NEW

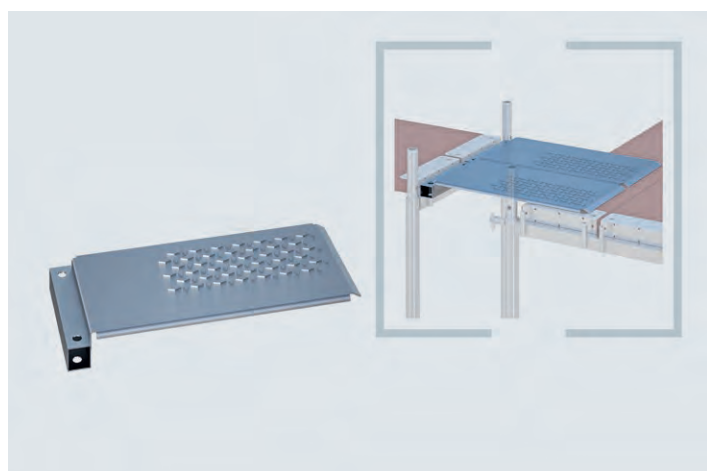


#### Transition plate

Bridges gaps resulting when scaffold sections meet.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
Single deck	0.66 x 0.29	5.80	10	06670	68.00
Double deck	0.66 x 0.59	12.20	10	06671	97.50
Triple deck	0.66 x 0.88	18.80	10	06672	147.80

NEW

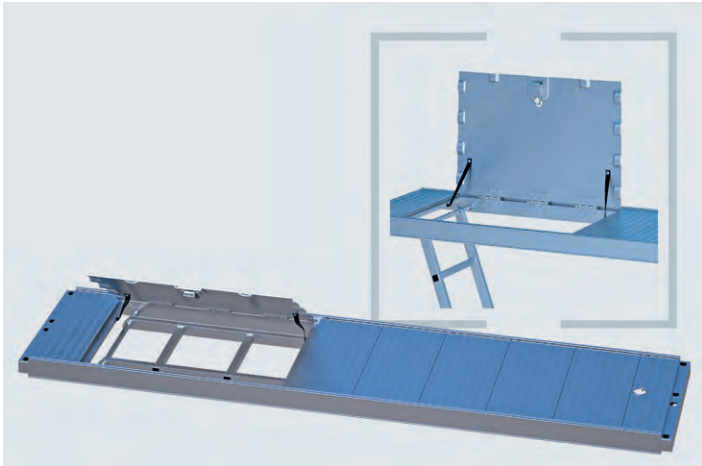

### Aluminium ladder frame - robust with integrated ladder, entirely out of aluminium

Hatch out of support-optimised, anti-slip aluminium plate with 3 hinges, 2 retaining straps. Traffic areas made from extruded, hollow aluminium profiles. High-quality stamped/pressed connections ensure optimum fit of the individual profiles. Ergonomic design of the profiles to ensure optimum handling; new type of safety latch; full stacking-compatibility with the classic ladder frame.


3.00 kN/m<sup>2</sup> load at 2.50 m length

2.00 kN/m<sup>2</sup> load at 3.00 m length

Info	H/L x B (m)	kg	Pack	Part No.	€/each
LC4	2.50 x 0.60	23.50	13	04741	380.00
LC3	3.00 x 0.60	26.00	13	04742	420.00

NEW

## SMART DETAILS

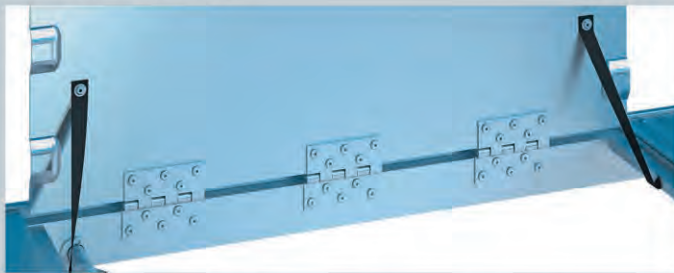

**Uncompromisingly stable** – Three resilient hinges with durable rivets ensure dependable access even when under maximum load.

**Uncompromisingly safe** – The hatch out of chequer plate does not close of its own accord. Two retaining straps ensure a secure hold.



**Uncompromisingly clever** – The wide and tapered design of the latch protects the ladder frame against damage.



### Aluminium ladder frame 2.00 m without ladder

Hatch out of support-optimised, anti-slip aluminium plate with 3 hinges, 2 retaining straps. Traffic areas made from extruded, hollow aluminium profiles. High-quality stamped/pressed connections ensure optimum fit of the individual profiles. Ergonomic design of the profiles to ensure optimum handling; new type of safety latch; full stacking-compatibility with the classic ladder frame.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
LC4	2.00 x 0.60	26.20	10	04743	290.00

### Steel ladder frame without ladder


Robust combination out of hot-galvanised steel and waterproof plywood surface.

3.00 kN/m<sup>2</sup> load at 2.50 m length

Info	H/L x B (m)	kg	Pack	Part No.	€/each
LC4	2.50 x 0.60	29.50	10	00666	264.00

Passendes Bauteil:  
Etagenleiter (Art.-Nr. 07100)

Matching component part:  
Access ladder (Art. No. 07100)

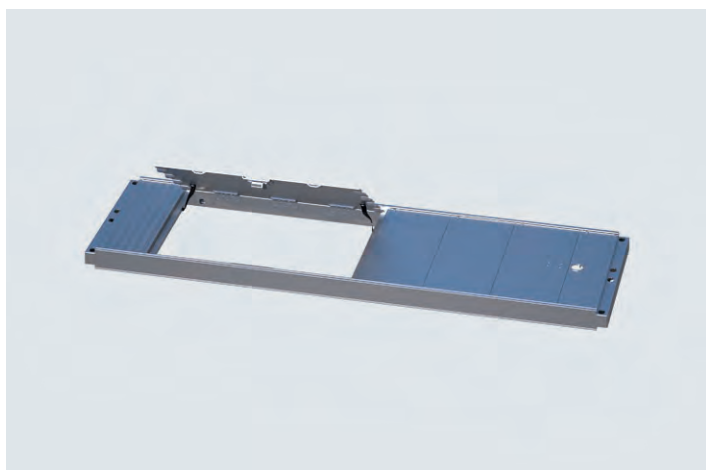

#### Aluminium ladder frame 1.50 m without ladder

With aluminium profile surface and aluminium chequer plate hatch, without ladder.


Info	H/L x B (m)	kg	Pack	Part No.	€/each
LK4	1.50 x 0.60	13.74	10	04745	267.80



#### Steel access ladder for 1 level

Is generally used with ladder frames without integrated ladder or at any place to bridge a normal scaffold level of 2.00 m. It may be removed when not in use for safety reasons or to prevent theft.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	2.16 x 0.40	9.40	20	07100	63.00

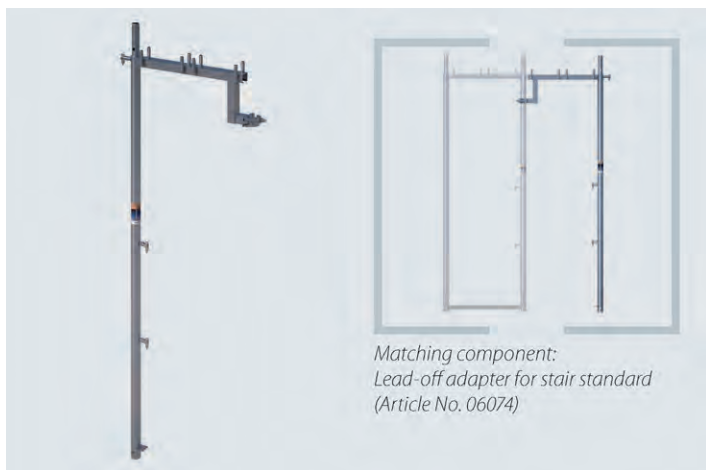


#### Stairway standard

The simple and flexible solution for the outer stairway ascent in combination with the aluminium stairway with platform.

Much reduced gap between the stairway platform and the scaffold decking, less space needed and considerable material savings are the main advantages compared with a stair tower with vertical frames. Also suitable for scaffold bays in façade recesses on passage frames. Stair exit possible over front-mounted bracket.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
AF 19	2.00 x 0.65	11.60		06075_19	106.80
AF 22	2.00 x 0.65	11.60		06075_22	106.80

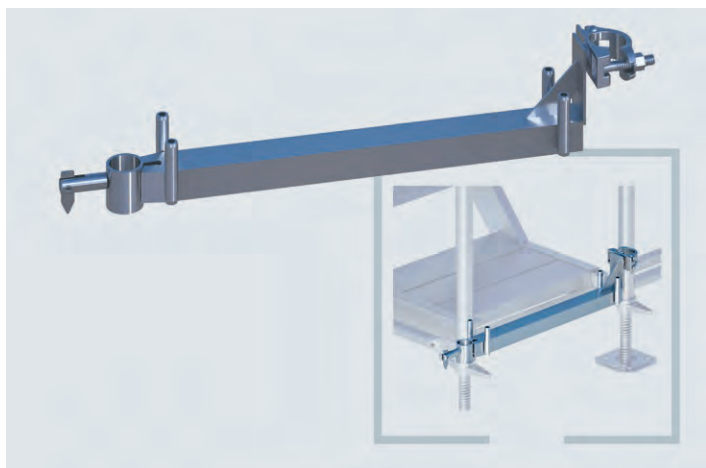

#### Lead-off adapter for stairway standard

2 pieces are necessary. Suitable for the assembly of stairway standards (Art. No. 06075) as a starter transom for the attachment of the first aluminium platform stairway (Art. No. 01039).

Info	H/L x B (m)	kg	Pack	Part No.	€/each
AF 19	0.65	3.20		06074_19	62.40
AF 22	0.65	3.20		06074_22	62.40



**Aluminium stairway 1.00 with platform**

A connecting or access stairway for scaffolds with 1.00 m height for the first level. Exit stairway for accessing the building.


Info	H/L x B (m)	kg	Pack	Part No.	€/each
Bay height 1 m	1.00 x 0.60	10.20		01031	<b>278.40</b>

**Aluminium staircase 1.00 m with 2 platforms**

Compensating stairs with 2 platforms. Bay height 1.00 m.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
Bay height 1.00 m	1.00 x 0.60	14.00	10	01056	<b>336.00</b> ①


NEW

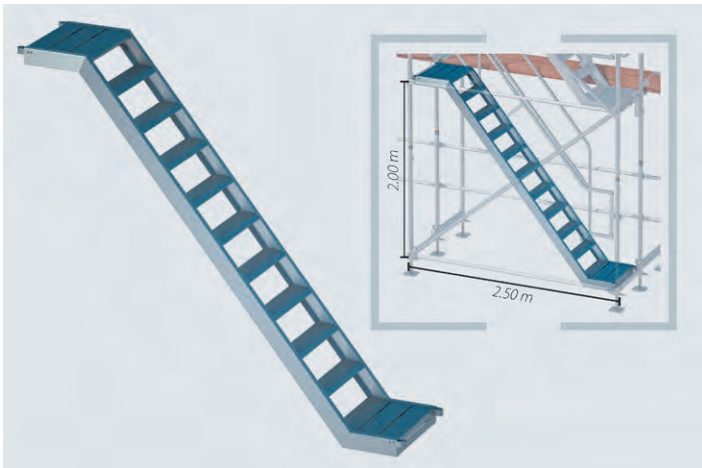**Aluminium stairway 2.00 with platform**

For attachment to the stairway standards and vertical frames. A convenient outer ascent. Particularly suitable for mid-sized scaffold access and for transporting material into the uppermost scaffold levels. Regulation-conform scaffold accesses as per TRBS 2121. For bay lengths of 2.50 m and bay heights of 2.00 m


Load-bearing capacity of up to 2.00 kN/m<sup>2</sup> as a scaffold stairway.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
Bay height 2 m	2.50 x 0.60	20.00	10	01039	<b>485.00</b>

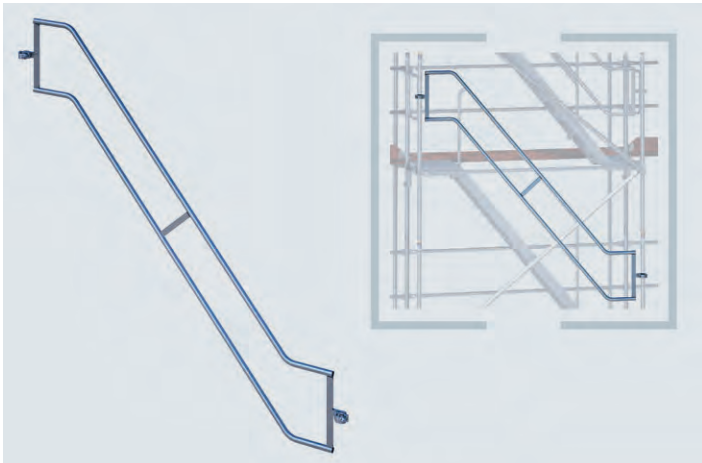**Outer handrail for aluminium stairway 2.00 m with platform**

Steel handrail for aluminium stairway 2.00 m with platform. Attached using the integrated semi-couplers to the vertical tubes or modular standards. For bay lengths of 2.50 m.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
AF 19/RX,PC	3.45	16.00	25	01040_19	<b>129.00</b>
AF 22/RX,PC	3.45	16.00	25	01040_22	<b>129.00</b>

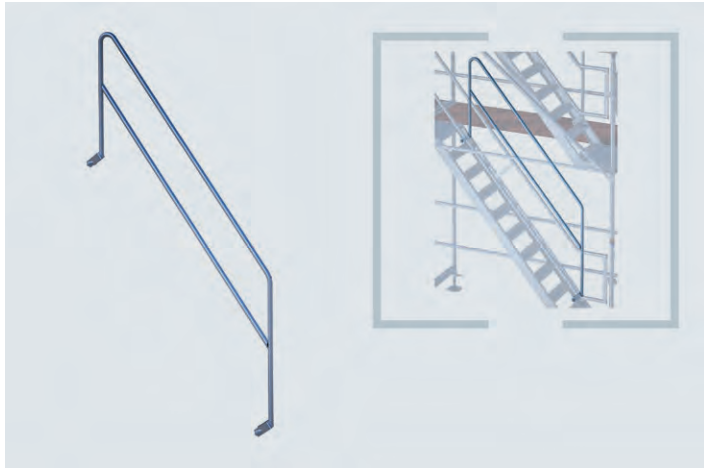

#### Inner handrail for aluminium stairway 2.00 m with platform

Steel handrail for aluminium stairway 2.00 m with platform. Attached to the stairway support using the clamping bracket with screw connection.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
AF 19/RX,PC	2.15	12.40	25	01041_19	123.60
AF 22/RX,PC	2.15	12.40	25	01041_22	123.60



#### Aluminium stair guardrail


Is attached to the stairway support and is a substitute for the stairway inner handrail when stairs run unidirectional (parallel).

Suitable for:

Aluminium stairway 2.00 m with platform (item no.: 01039)

Aluminium steps 2.00 m with platform for tube support (art. no.: 00979)

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	0.60	3.00	10	01050	79.20 ②

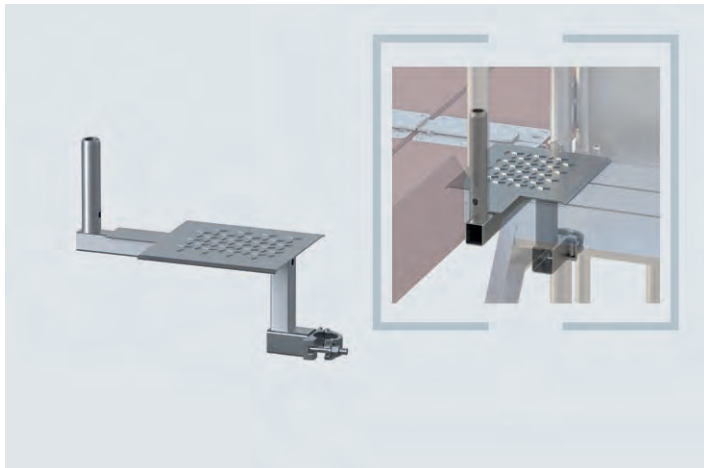


#### Gap cover for aluminium platform stairs with supports

To take up standard guardrail posts that are combined with primary guardrails in accordance with the bay length to form a handrail. The use of stair perimeter guardrails is no longer needed.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
		5.74		07090_19	78.50 ②
		5.74		07090_22	78.50 ②

NEW

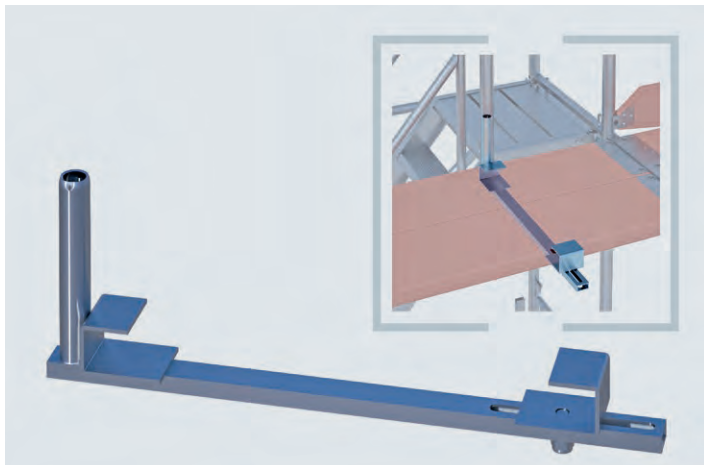


#### Guardrail holder for decks

For fitting guardrail posts on scaffold decking at any side outside the modular dimensions. Particularly suitable for the uppermost level in the case of stair towers and for scaffold inner corners.

Appropriate for wooden planks with an installation height of max. 48 mm. Not suitable for steel decks or aluminium ladder frames.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	0.65	3.00		00687	55.20

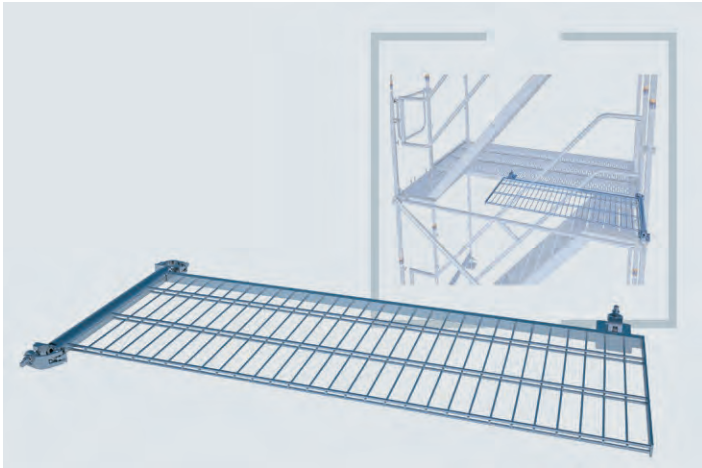


#### Access barrier for aluminium stairway 2.00 m with platform

Suitable for the façade scaffolding SUPER 0.65 m. The stairway entrance is simply made inaccessible for unauthorised persons. Screws and couplers are used for the fitting, opening and closing.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
AF 19	1.50 x 0.65	16.40		07139_19	235.00
AF 22	1.50 x 0.65	16.40		07139_22	235.00

NEW

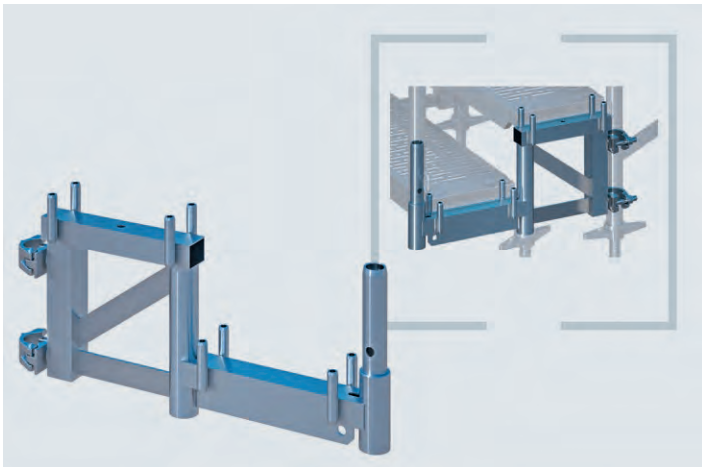

#### Stair bracket lead-off adapter for system decks

For the DIN-conform fitting of temporary stairs, in particular for intermediate heights and to enable access to the scaffold.


The scaffold stairs are flexible in height and width. Stair widths of 0.65 m to 3.00 m can be constructed with the use of SUPER system decks. The extension steps are implemented with stair brackets. 2 lead-off adapters as well as 2 base jacks are required for each stairway. SUPER system decks are secured against lift by locking springs (Art. No. 04552).

Info	H/L x B (m)	kg	Pack	Part No.	€/each
AF 19	0.68 x 0.32	8.00	10	01941_19	114.00 ②
AF 22	0.68 x 0.32	8.00	10	01941_22	114.00 ②

### SMART DETAILS




**Flexible** – This safe and convenient scaffold access allows step widths of between 0.65 m and 3.00 m and is an interesting alternative to system-independent solutions.




**Matching component part** – The lead-off adapter provides the ideal access and is correspondingly combined with stair brackets to match the height difference.



**Alternative** – We also offer the stair brackets and lead-off adapters for decks with tube hook-up (Art. Nos. 01943/01944)



**Safe** – Decks are secured against lift either by the integrated deck retainers or by retaining springs (Art. No. 04552) in the case of system decks.

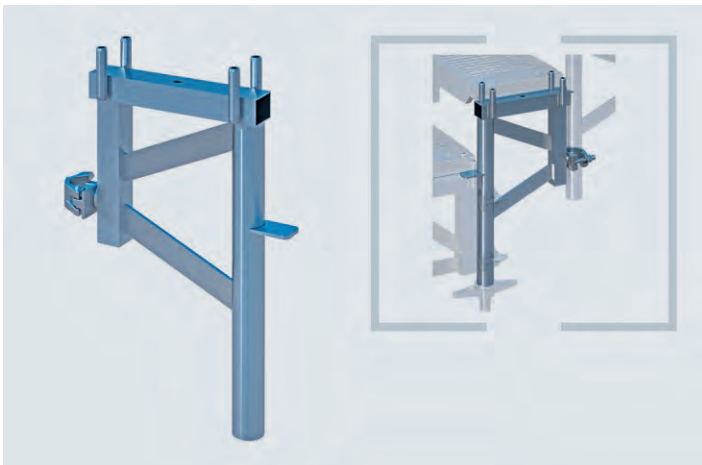


#### Stair bracket for system decks

Extension steps for the scaffold stairway are created with stair brackets for SUPER system decks. They are positioned on the lead-off adapters for the first extension step and they can be flexibly supplemented in height and width. Guardrails can be fitted using either tubes or diagonals. 2 stair brackets are needed for each extension step. SUPER system decks are secured against lift by locking springs (Art. No. 04552).

Info	H/L x B (m)	kg	Pack	Part No.	€/each
AF 19	0.30 x 0.48	5.00	50	01942_19	66.00 ②
AF 22	0.30 x 0.48	5.00	50	01942_22	66.00 ②



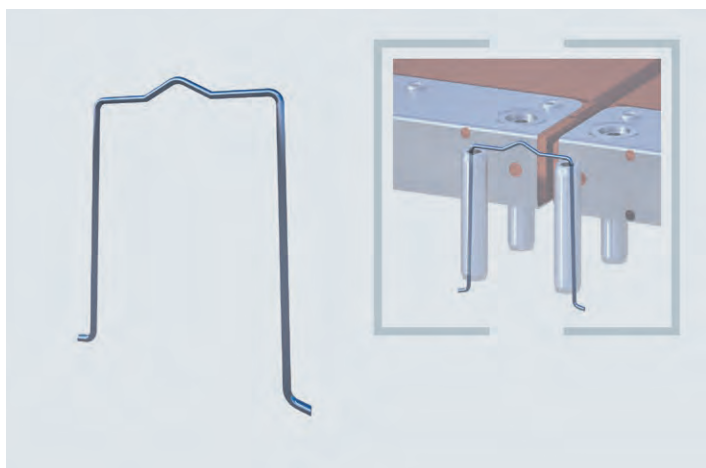

#### Retaining spring

Robust spring steel wire, hot-galvanised, to secure the decks and ladder frames in the uppermost level or when cantilever brackets, coupler brackets, platform scaffolds or stair brackets are used.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
		0.01	1500	04552	0.65

Matching component part:  
Deck retainer (Art. No. 07110)



#### Suspension bracket SUPER 0.30 m for system decks

To widen the scaffold by 0.30 m to the wall side. Screw-free, self-aligning, rapid-fitting without couplers. Only possible to use on decked areas.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	0.30	2.20	250	07096	38.40

#### Suspension bracket 0.14 m for tube hook-up

To widen the scaffold by 0.14 m to the wall side. Screw-free, self-aligning, rapid-fitting without couplers. Only possible to use on decked areas.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	0.14	1.30	250	01871	32.0

#### Insertion bracket 140 - RA

For compensation decks 140 mm.


Round tube. Temporary scaffold widening, inwards.


Removal of brackets as building work progresses (attachment of thermal insulation systems).

Gap to facade is closed.

Versions: 1-deck, 2-deck.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	0.14	1.20	25	01870	25.60




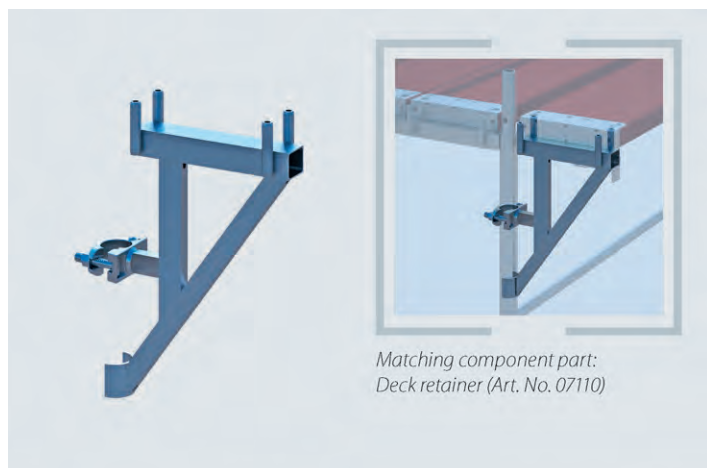

#### Coupler bracket 0.30 without support

To widen a scaffold bay on the wall side by a deck width for an entire scaffold level or in the case of wall recesses for example. Attachment by means of the welded-on semi-couplers.


Info	H/L x B (m)	kg	Pack	Part No.	€/each
AF 19	0.30	2.80	100	00593_19	36.90
AF 22	0.30	2.80	100	00593_22	36.90

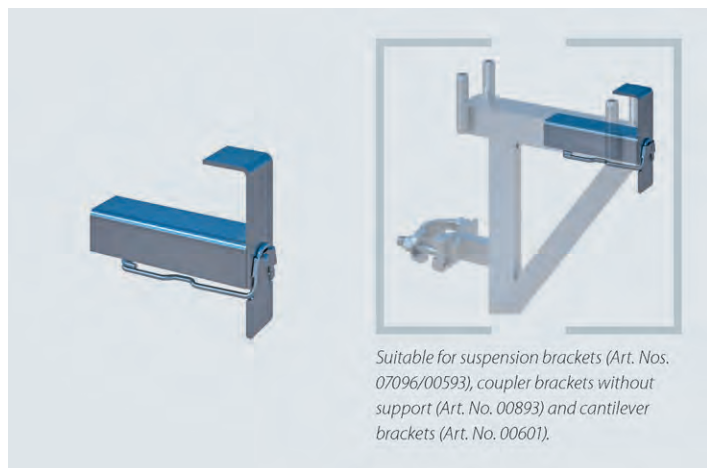

#### Deck lock

For suspension brackets and coupler brackets without supports. Undetachable thanks to spring fastener.


Info	H/L x B (m)	kg	Pack	Part No.	€/each
	0.15 x 0.13	0.40		07110	4.50 ①

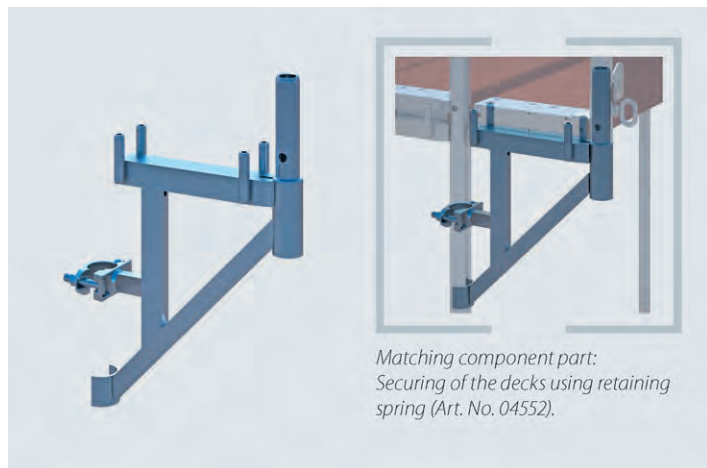

#### Coupler bracket 0.30 with support

To widen a scaffold bay by one deck width at any position in the scaffold. Comes with supports for guardrail posts to enable fitting of the three-piece side protection.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
AF 19	0.30	4.40	80	00594_19	41.80
AF 22	0.30	4.40	80	00594_22	41.80

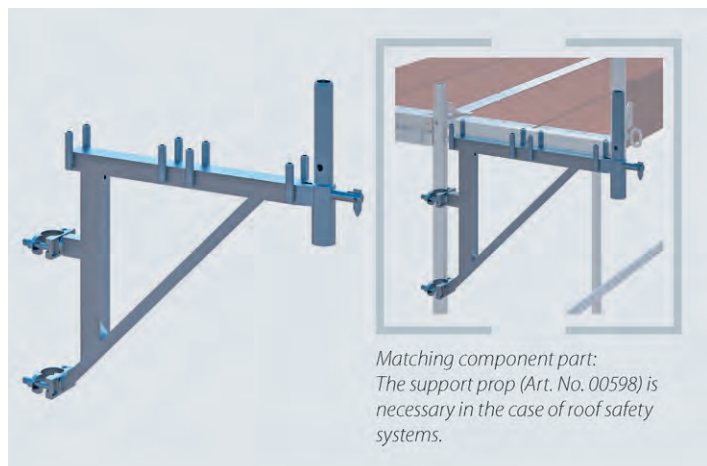


#### Cantilever bracket 2-deck with supports

To widen a scaffold bay by the double deck width or an entire scaffold level. Particularly suitable in the case of large recesses or façade protrusions. Designed in terms of dimensions to enable entirely offset scaffold bays to be constructed.


Info	H/L x B (m)	kg	Pack	Part No.	€/each
AF 19	0.65	7.20	25	00595_19	69.00
AF 22	0.65	7.20	25	00595_22	69.00

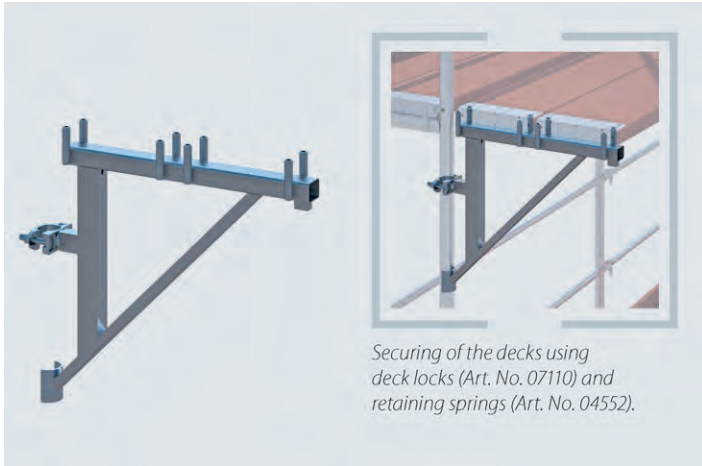

**Cantilever bracket 2-deck without supports**


To widen a scaffold bay on the wall side by two deck widths. Closes large gaps between the scaffolding and the wall for individual bays or even entire scaffold levels. Optimally suited for creating a larger working area.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
AF 19	0.65	7.00		00581_19	66.50
AF 22	0.65	7.00		00581_22	66.50

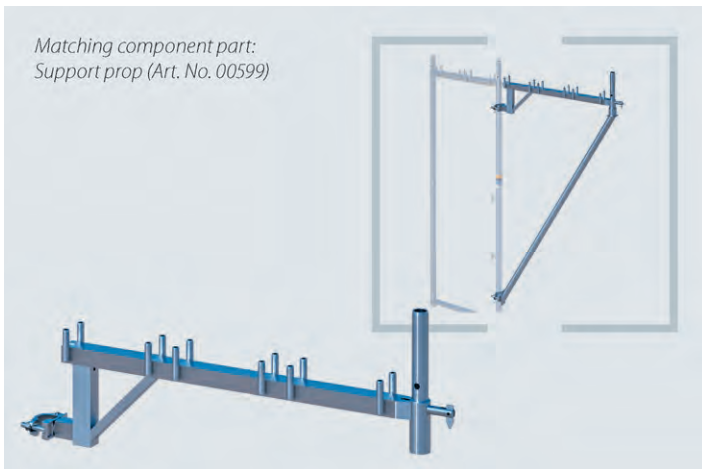**Cantilever bracket 3-deck with supports**

The maximum for system-linked scaffold widening. Extends the working area by three deck widths in the longitudinal direction or by about 1.00 m at the front end. Attachment by means of the welded-on semi-couplers. A support prop (Art. No. 00599) needs to be fitted for statical reasons.


Info	H/L x B (m)	kg	Pack	Part No.	€/each
AF 19	1.00	15.00	10	00596_19	95.00
AF 22	1.00	15.00	10	00596_22	95.00

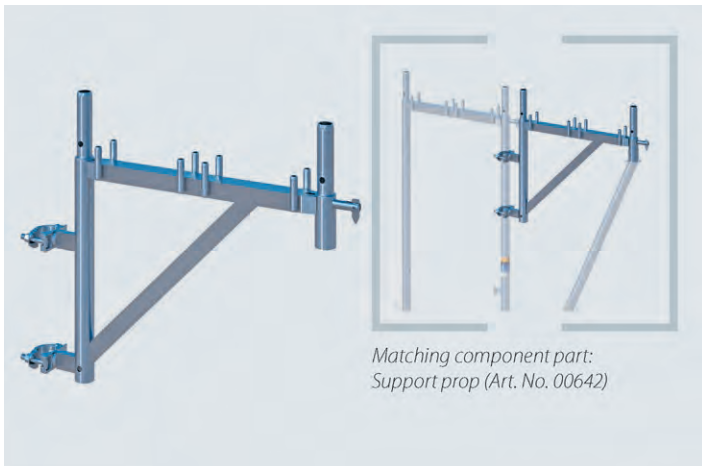**Frame bracket 2-deck**

The frame bracket is used for scaffold offsets of one frame width and fitted with 2 couplers. Contrary to the cantilever bracket, the offset is not only possible at the decking height but at any height. This enables an optimum fitting of the scaffolding to the building structure.

2-deck version for the SUPER 65 vertical frame with gravity lock or lug connection.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
AF 19	0.65	8.50	25	00640_19	85.00
AF 22	0.65	8.50	25	00640_22	85.00

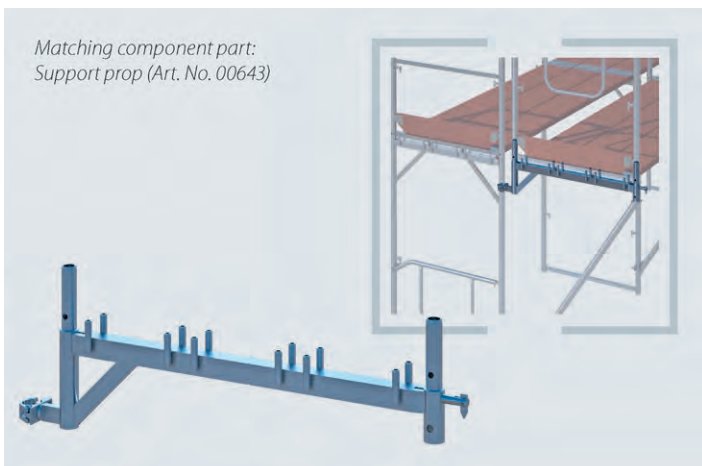**Frame bracket 3-deck**

The frame bracket is used for scaffold offsets of one frame width and fitted with 1 coupler. Contrary to the cantilever bracket, the offset is not only possible at the decking height but at any height. This enables an optimum fitting of the scaffolding to the building structure.

3-deck version for the SUPER 100 vertical frame with gravity lock or lug connection.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
AF 19	1.00	10.00	25	00641_19	108.00
AF 22	1.00	10.00	25	00641_22	108.00




*Suitable for cantilever and frame brackets.*

#### Support prop

For even more safety when using cantilever or frame brackets. Stabilises the entire overhang and diverts the vertical forces into the vertical frames. Enhances load-bearing capacity and the sense of security.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
Cantilever bracket 2-planked AF 19	1.80	8.50	50	00598_19	56.90
Cantilever bracket 2-planked AF 22	1.80	8.50	50	00598_22	56.90
Cantilever bracket 3-planked AF 19	1.95	9.40	50	00599_19	56.90
Cantilever bracket 3-planked AF 22	1.95	9.40	50	00599_22	56.90
Frame bracket 2-planked AF 19		8.50	50	00642_19	56.90
Frame bracket 2-planked AF 22		8.50	50	00642_22	56.90
Frame bracket 3-planked AF 19		8.60	50	00643_19	56.90
Frame bracket 3-planked AF 22		8.60	50	00643_22	56.90

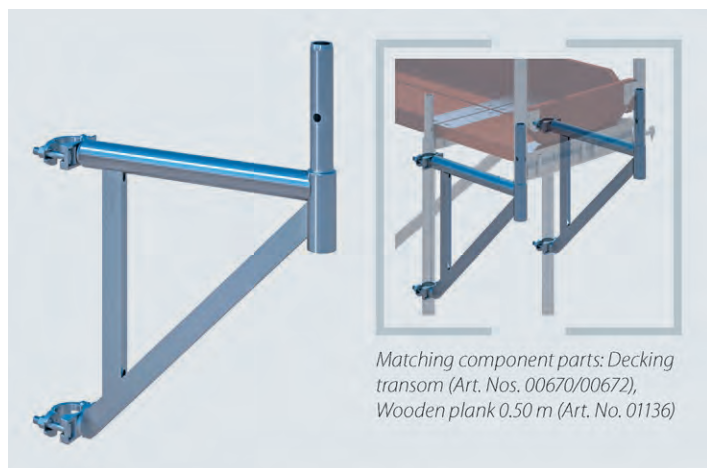


*Matching component parts: Decking transom (Art. Nos. 00670/00672), Wooden plank 0.50 m (Art. No. 01136)*

#### Extension bracket with supports 0.50 m

For the front-end extension of the scaffold bay by 0.50 m e.g. in the case of wall protrusions: in combination with system decks 0.50 m and decking transoms (Art. No. 00670/00672). It can similarly be used to shorten scaffold bays.


Info	H/L x B (m)	kg	Pack	Part No.	€/each
AF 19	0.50	5.00		00597_19	77.70
AF 22	0.50	5.00		00597_22	77.70

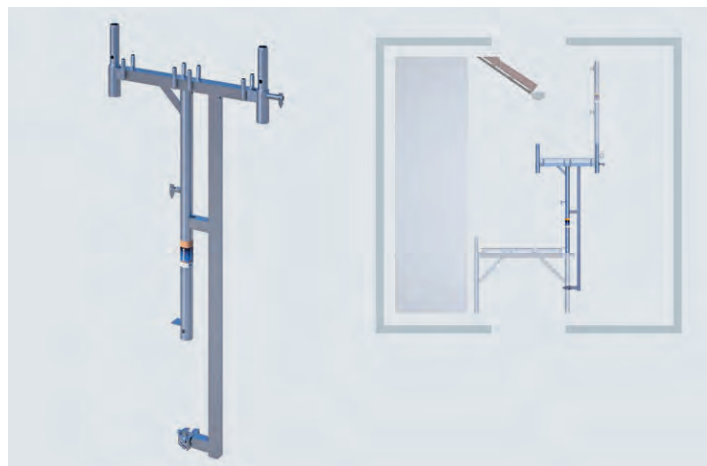

#### Roofers' bracket 0.65

Very economic system solution for simultaneous work on roofs and facades. On the one hand it allows undisturbed work up to the uppermost scaffold level while at the same time offering a roof safety system as per scaffold group 3.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
AF 19	0.65	15.00		04846_19	178.80
AF 22	0.65	15.00		04846_22	178.80

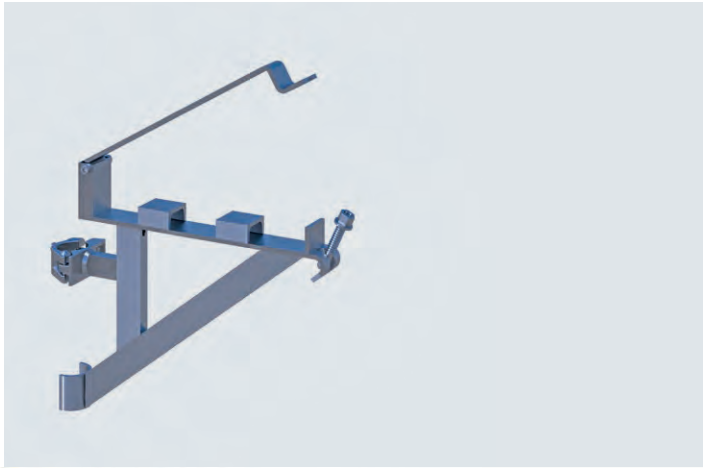**Corner bracket 1-deck, foldable**


The system solution for scaffold corners and crossovers. Time-consuming fastening, angle grinding and sawing are all things of the past. Simply close the gaps with system elements from your portfolio.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
AF 19	0.33	4.90	10	07097_19	<b>114.90</b>
AF 22	0.33	4.90	10	07097_22	<b>114.90</b>


NEW

**SMART DETAILS**

**Flexible** – Fits for all RUX SUPER decks.

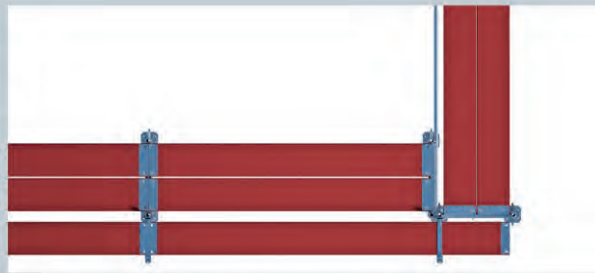


**Clever** – Gaps resulting from cornered structures are closed by applying correspondingly longer scaffold planks. Decks are then reliably secured against lift and slip.

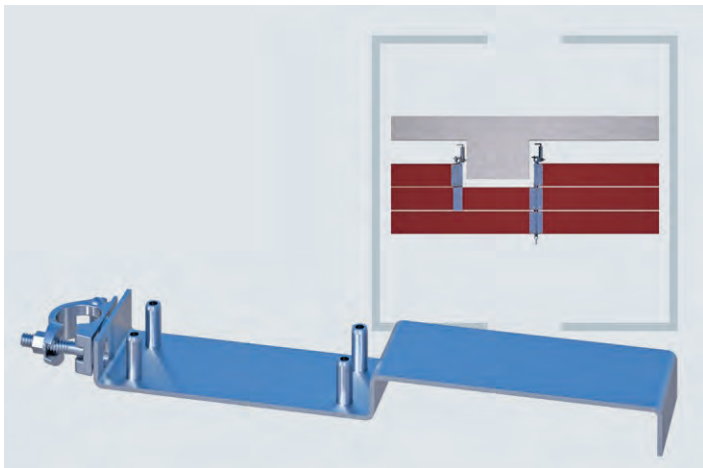**Bay shortener SUPER 65/100**

Allows wall-side scaffolding of recesses outside the bay lengths. From scaffold class 5, the bay shortener may only be used with aluminium or steel decks up to a length of 2.00 m and with wooden planks up to a length of 1.50 m. Fitting on vertical scaffold tubes reaching to the ground.


Info	H/L x B (m)	kg	Pack	Part No.	€/each
AF 19	0.65	4.60	20	00604_19	<b>67.20</b>
AF 22	0.65	4.60	20	00604_22	<b>67.20</b>



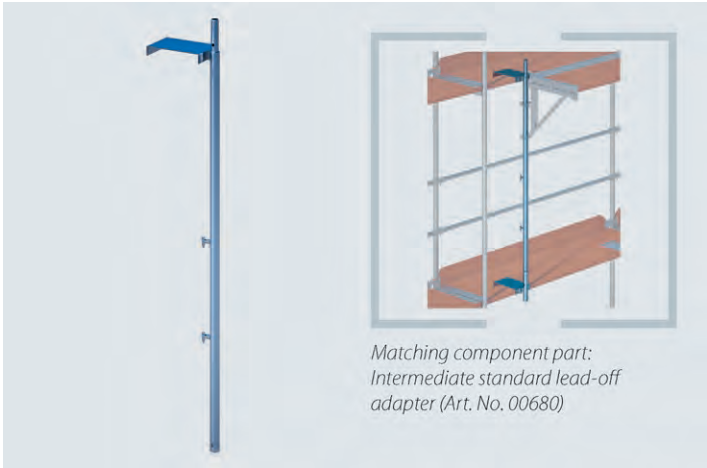

**Intermediate standard**  
Intermediate standards together with the relevant lead-off adapter enable overhangs outside the prescribed modular dimensions. Is used for bay windows, balconies or other wall protrusions.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	2.00 x 0.29	11.20	20	00683	64.00

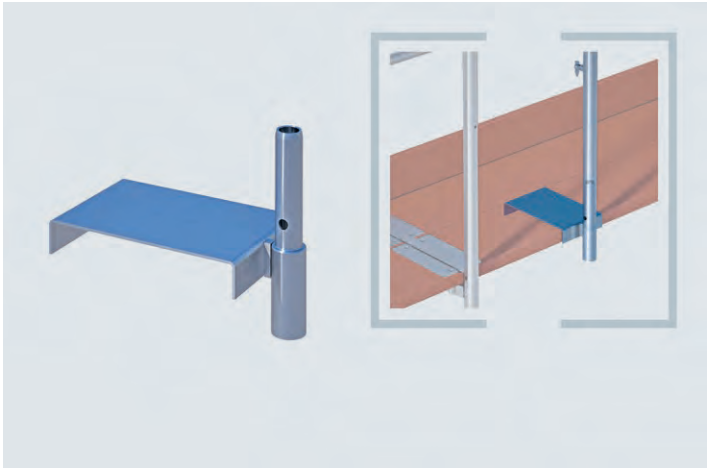

**Intermediate standard lead-off adapter**  
Enables overhangs at any position outside the prescribed modular dimensions when used together with intermediate standards. Is used for bay windows, balconies or other wall protrusions.


Info	H/L x B (m)	kg	Pack	Part No.	€/each
	0.15 x 0.29	4.20	20	00680	26.90



#### Front guardrail frame

Front-end concluding section for the uppermost level of a façade scaffolding. Double side protection and deck retainer in one.


Info	H/L x B (m)	kg	Pack	Part No.	€/each
	1.00 x 0.65	11.00	25	01544	<b>67.80</b>
	1.00 x 1.00	12.60	25	01558	<b>73.20</b>

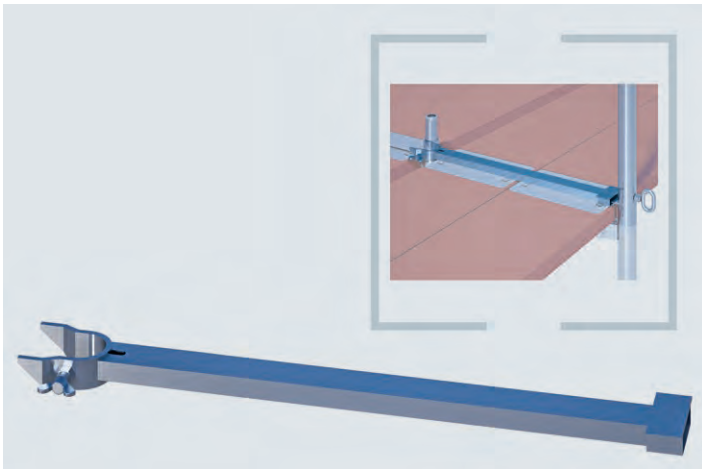

#### Deck holder

Secures the decks in the uppermost level. Necessary when using guardrail posts without transoms. It is simply mounted over the flat bar in the floor area and affixed on the other side by means of a wing nut, tool-free.


Info	H/L x B (m)	kg	Pack	Part No.	€/each
	0.65	1.40		00644	<b>38.40</b>
	1.00	1.80		00647	<b>42.20</b>

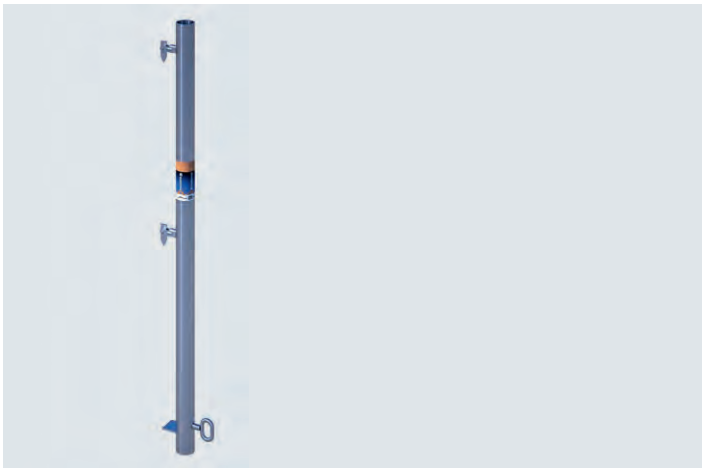

#### Guardrail post

For creating the three-piece, all-round side protection in the uppermost level. Not suitable for safety catch scaffolds. The welded-on flat bar serves as a deck retainer and for attachment of the deck holders. Comes with ring bolt M14. Guardrail post 2.05 (Art. No. 00689) can also be used for catch scaffolds in conjunction with guardrail post holder (Art. No. 06689 and Art. No. 06690).


Info	H/L x B (m)	kg	Pack	Part No.	€/each
	1.05	4.00	50	00686	<b>25.90</b>
Can also be used for safety scaffolds in conjunction with the guard-railing post (part no. 06689 and part no. 06690).	2.05	8.00	50	00689	<b>49.80</b>

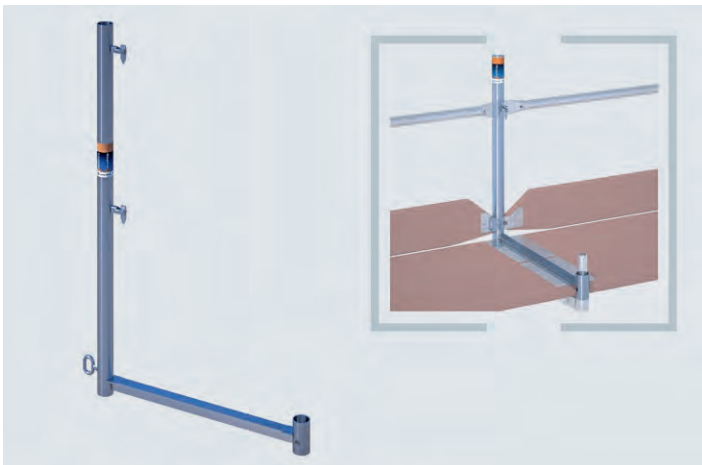

#### Guardrail post with transom

Identical function to the guardrail posts but with an integrated transom for securing the decks. Tool-free fitting with ring bolt M14.


Info	H/L x B (m)	kg	Pack	Part No.	€/each
	1.00 x 0.65	5.00	50	01546	<b>41.00</b>
	1.00 x 1.00	6.00	50	01560	<b>49.80</b>

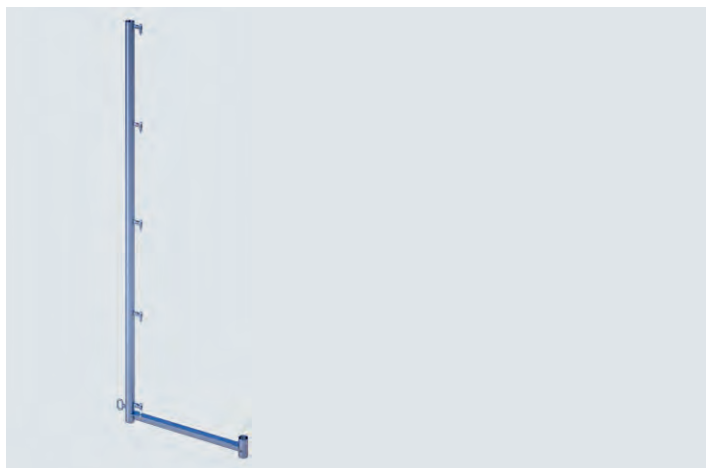

#### Guardrail post with transom for safety net

One product, three solutions for the uppermost scaffold level. Can be used as a deck retainer, for attachment of the three-piece side protection and for the fitting of protective nets. Tool-free fitting with ring bolt M14.


Info	H/L x B (m)	kg	Pack	Part No.	€/each
	2.00 x 0.65	9.00	50	01548	69.50
	2.00 x 1.00	10.00	50	01561	83.00

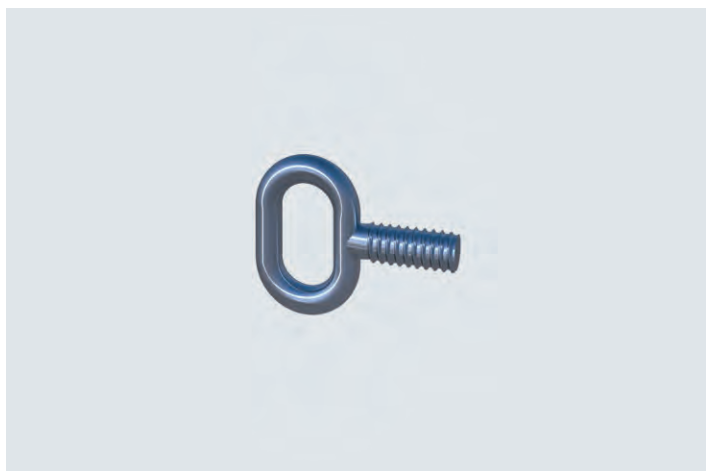

#### Ring bolt M14

For attaching and securing guardrail posts in the uppermost scaffold level.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
		0.12		00567	2.80

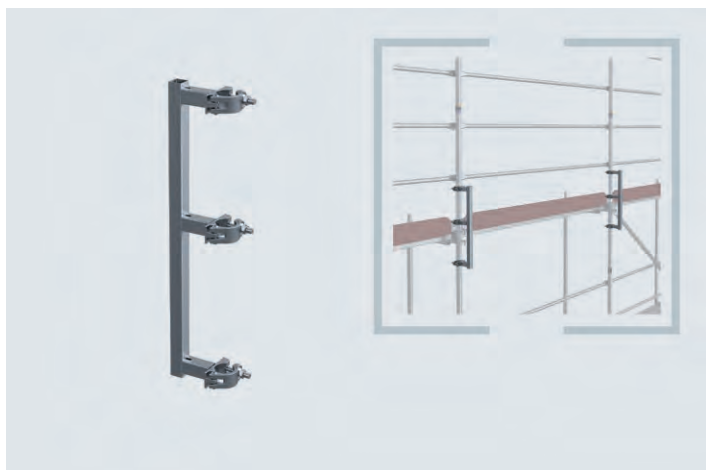


#### Guardrail post holder for safety nets, straight

For securing guardrail posts by coupler connection.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	2.00	4.19		06690	47.00 ②

NEW

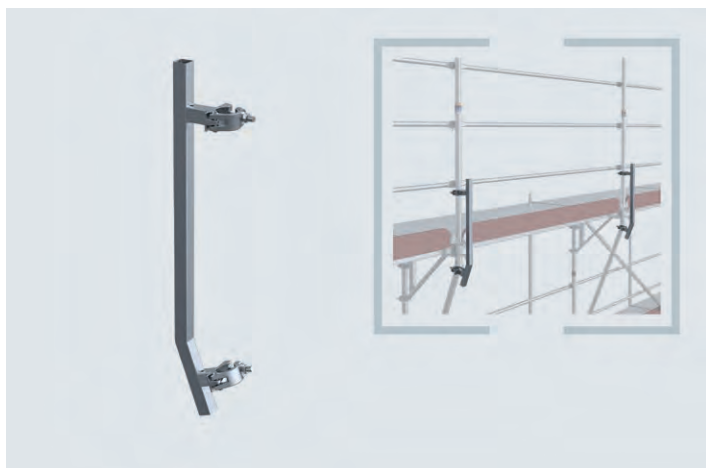


#### Guardrail post holder for safety nets, curved

For securing guardrail posts by coupler connection when using brackets.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	2.00	3.50		06689	49.50 ②


NEW

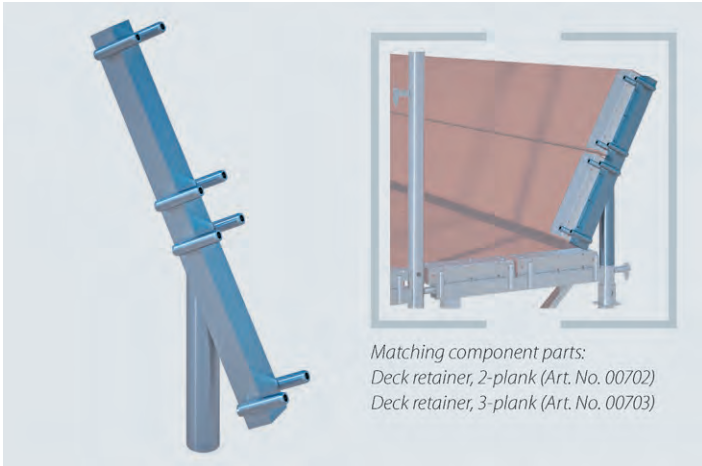

**Protective roof extension arm**

Secures passers-by and staff against falling objects. Particularly important for building sites in inner-city areas. Suitable for cantilever brackets, two or three-deck, with supports, in combination with RUX-SUPER system decks out of wood, steel or aluminium.


Info	H/L x B (m)	kg	Pack	Part No.	€/each
	0.64	3.00		00701	47.50

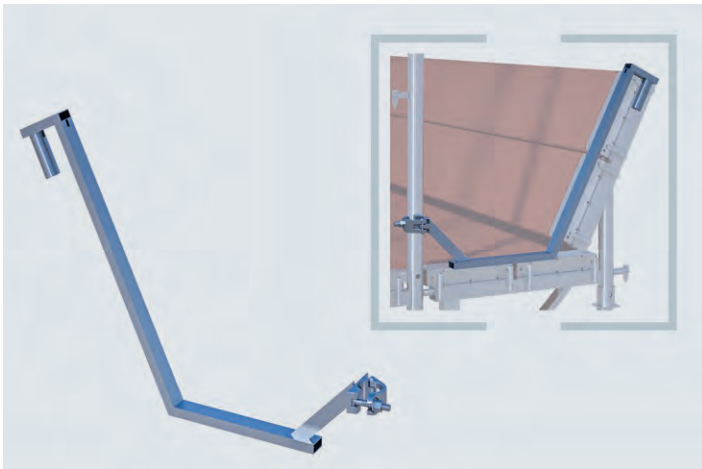**Deck retainer for protective roof extension arm**

Suitable for the protective roof extension arm.

Secures the decks in the uppermost level, both the decks on the protective roof extension arm (00701) as well as those on the brackets. One side is inserted into the shaft of the protective roof extension arm, the other is attached with the semi-coupler to the frame.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
2-planked AF 19		2.80		00702_19	46.60
2-planked AF 22		2.80		00702_22	46.60
3-planked AF 19		3.40		00703_19	51.10 ①
3-planked AF 22		3.40		00703_22	51.10 ①

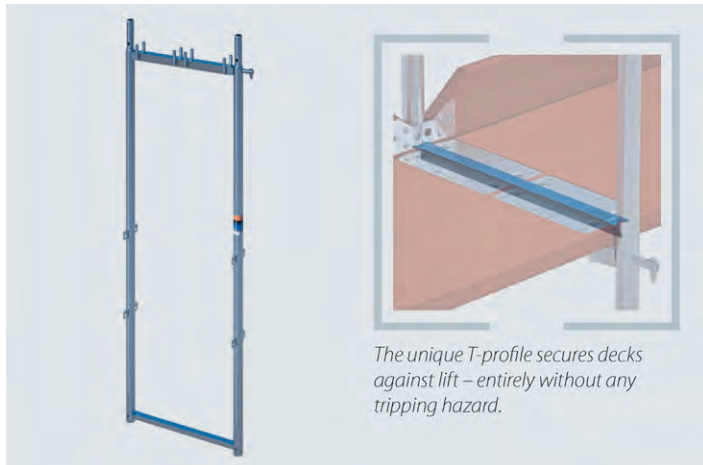

#### Vertical steel frame SUPER 65 ULTRA-O


Tube profile Ø 48.3 x 2.7 mm.

The classic basic element of the SUPER 65 façade scaffolding. Comes with pins to take up two decks with a width of 0.29 m. The base transom with T profile serves as a deck retainer and additionally for the take-up of horizontal loads. Comes with three gravity locks for the screw-free attachment of primary guardrails and diagonals. Drilled at top and bottom to enable interconnection.

Lug scaffold version with welded-on lugs for the attachment of the toggle guardrail.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	2.00 x 0.65	16.50	25	01566U	<b>95.80</b>

Lug

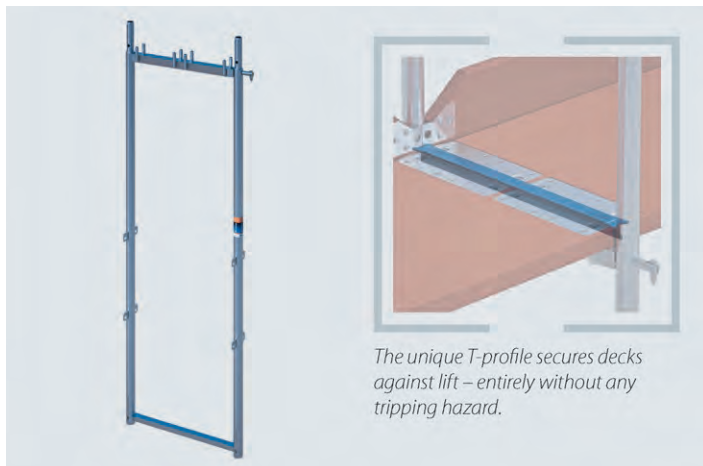

#### Vertical steel frame SUPER 65-0

Tube profile Ø 48.3 x 3.2 mm.

The classic basic element of the SUPER 65 façade scaffolding. Comes with pins to take up two decks with a width of 0.29 m. The base transom with T profile serves as a deck retainer and additionally for the take-up of horizontal loads. Comes with three gravity locks for the screw-free attachment of primary guardrails and diagonals. Drilled at top and bottom to enable interconnection. Lug scaffold version with welded-on lugs for the attachment of the toggle guardrail.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	0.50 x 0.65	8.40	25	01525	<b>72.00</b> ①
	1.00 x 0.65	12.00	25	01526	<b>78.00</b> ①
	1.50 x 0.65	16.70	25	01562	<b>88.50</b> ①
	2.00 x 0.65	19.00	20	01566	<b>95.80</b>

Lug




#### Vertical aluminium frame SUPER 65-0

Completely out of aluminium and technically designed like the steel frame, but more than 50 % lighter. Suitable for long transport distances and for various other ancillary construction trades.

Lug scaffold version with welded-on lugs.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	2.00 x 0.65	10.00	20	01563	<b>148.00</b>

Lug

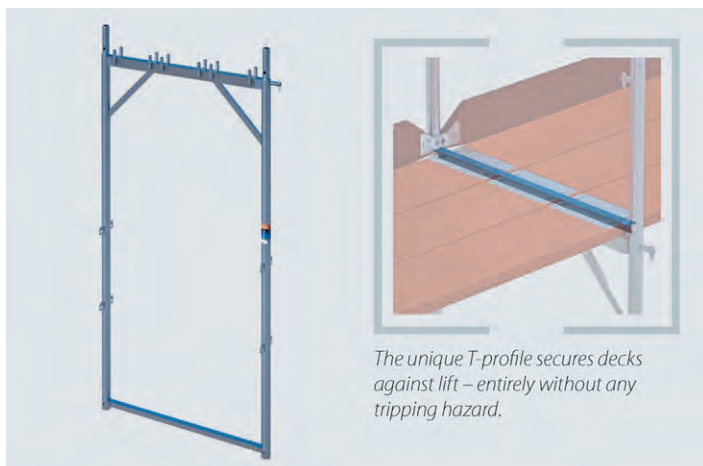


#### Vertical steel frame SUPER 100-0

Fundamental supporting element of the SUPER 100 façade scaffolding. Designed for three decks with a width of 0.29 m. Depending on the type of deck and the bay length, suitable for scaffolds up to group IV. Comes with five gravity locks for the screw-free attachment of primary guardrails and diagonals. The base transom with T profile serves as a deck retainer and provides for horizontal stability.

Lug scaffold version with welded-on lugs for the attachment of the toggle guardrail.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	0.50 x 1.00	11.20	25	01550	<b>89.00</b>
	1.00 x 1.00	15.40	25	01551	<b>93.50</b>
	1.50 x 1.00	20.70	25	01583	<b>112.00</b> ①
	2.00 x 1.00	23.50	20	01575	<b>127.00</b>

Lug

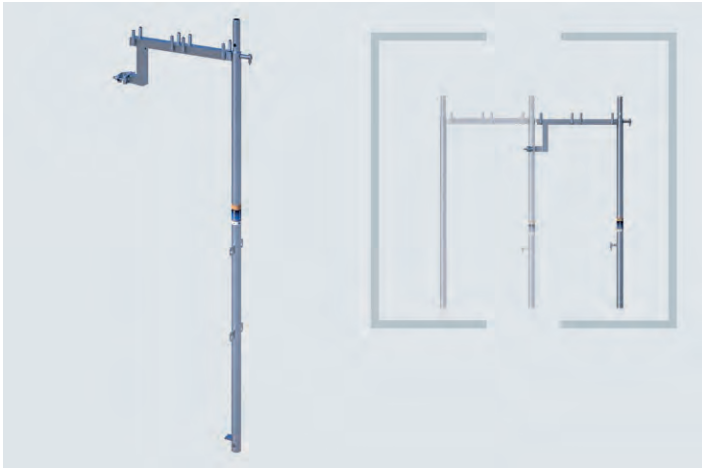**Stairway standard SUPER-O**


The simple and flexible solution for the outer stairway ascent in combination with the aluminium stairway with platform.

Much reduced gap between the stairway platform and the scaffold decking, less space needed and considerable material savings are the main advantages compared with a stair tower with vertical frames. Also suitable for scaffold bays in façade recesses on passage frames. Stair exit possible over front-mounted bracket.

Lug scaffold version with welded-on lugs for the attachment of the so-called toggle guardrail.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	2.00 x 0.65	11.60		06077	111.00


Lug

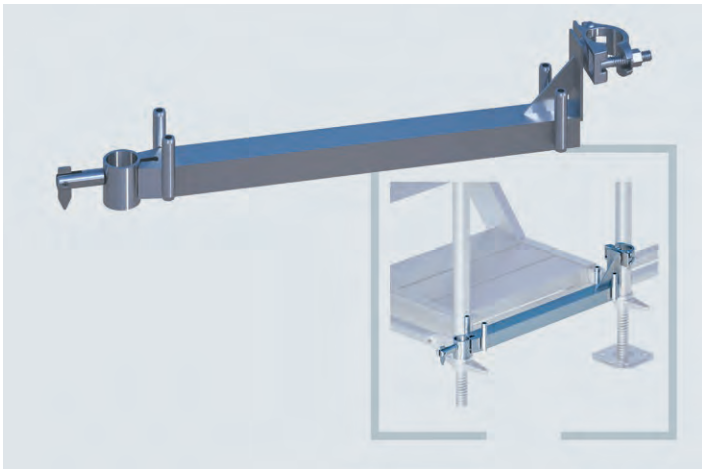**Lead-off adapter for stairway standard-O**

2 pieces are necessary. Suitable for the assembly of stairway standards (Art. No. 06077) as a starter transom for the attachment of the first aluminium platform stairway (Art. No. 01039).

Info	H/L x B (m)	kg	Pack	Part No.	€/each
AF 19	0.65	3.20		06074_19	62.40
AF 22	0.65	3.20		06074_22	62.40



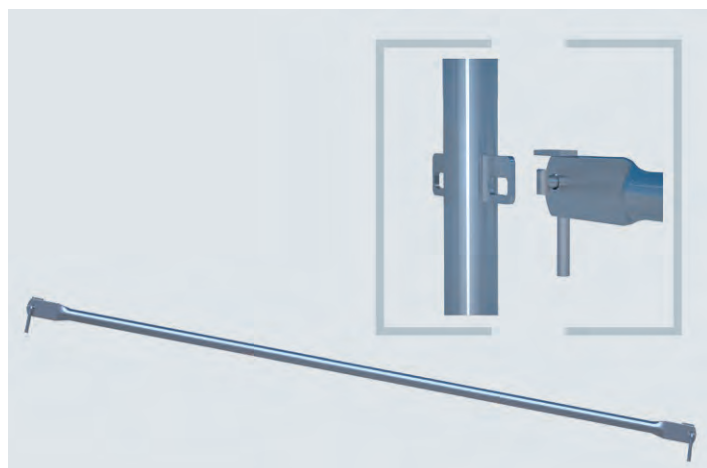


#### Toggle guardrail for lug scaffold

For the three-piece side protection on lug scaffolds. Fitting: simply insert the firmly attached toggle bolts into the lugs on the vertical frames.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
Tube-Ø 38 mm	0.65	1.40	100	00586	15.50
Tube-Ø 38 mm	1.00	2.10	100	00587	19.50
Tube-Ø 38 mm	1.50	3.20	100	00588	21.50
Tube-Ø 38 mm	2.00	4.20	100	00589	24.50
Tube-Ø 38 mm	2.50	5.20	100	00590	26.50
Tube-Ø 38 mm	3.00	5.80	100	00591	29.50
Tube-Ø 42.4 mm	4.00	8.00	100	00592	49.00

Lug

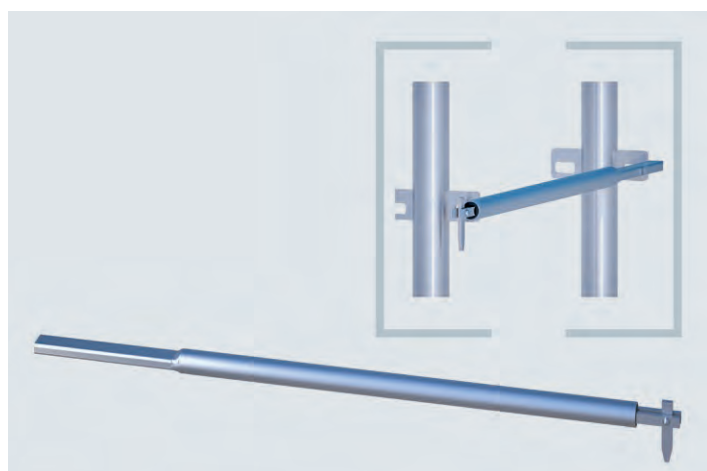

#### Front guardrail (basic) for lug scaffold

For the front-end fitting of the three-piece side protection. Simple, screw-free mounting by means of the lugs on the vertical frame. Two pieces are necessary for each end frame.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	0.65	1.40		01568	14.90
	1.00	2.10		01577	15.90

Lug

**Front guardrail frame for lug scaffold**

Used for the uppermost scaffold level as double side protection and deck retainer.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	1.00 x 0.65	11.00	25	01571	<b>67.80</b>
	1.00 x 1.00	12.60	25	01580	<b>73.20</b>

Lug

**Guardrail post for lug scaffold**

For the attachment of the toggle guardrail in the uppermost scaffold level, with welded-on flat bar as deck retainer. Tool-free fitting with ring bolt M14.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	1.05	4.00	50	00583	<b>34.90</b>
	2.05	8.00	50	00584	<b>62.40</b>


Lug

**Guardrail post with transom for lug scaffold**

For the attachment of the toggle guardrail and securing the uppermost decking. Tool-free fitting with ring bolt M14.


Info	H/L x B (m)	kg	Pack	Part No.	€/each
	1.00 x 0.65	5.20	50	01573	<b>46.80</b> ①
	1.00 x 1.00	6.50	50	01582	<b>54.70</b>

Lug

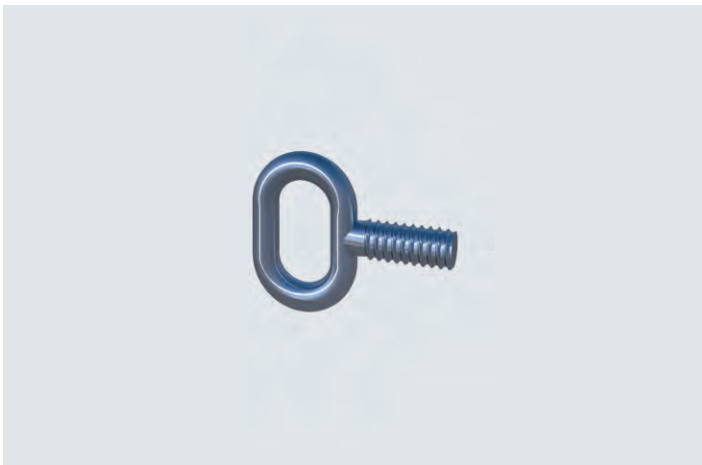**Ring bolt M14**

For attaching and securing guardrail posts in the uppermost scaffold level.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
		0.12		00567	<b>2.80</b>

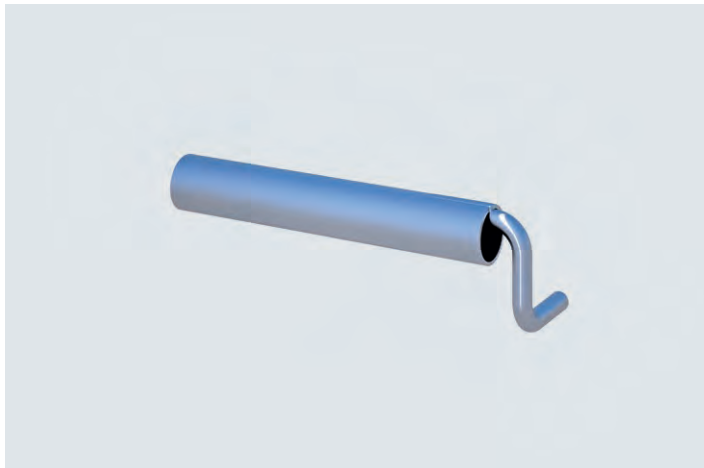

#### Steel shore tube

New: comes with inner anchor hook. Wall plugs, eyelets, steel shore tube and standard couplers form the unit that ensures tight and pressure-resistant anchorage of the scaffolding to the building structure.

H/L x B (m)	kg	Pack	Part No.	for order volume of: €/each		
0.30	1.40	500	00367	1: 9.15	50: 6.90	100: 6.50
0.40	1.80	500	00368	1: 9.90	50: 7.30	100: 6.90
0.60	2.50	400	00369	1: 11.00	50: 9.20	100: 8.20
1.00	4.00	200	00370	1: 14.30	50: 10.70	100: 10.20
1.40	5.40	150	00372	1: 15.65	50: 14.90	100: 12.40

SNP

NEW



#### Ring screw

For the standard scaffold anchorage. Galvanised design for frequent use. Welded eyelet, screw shaft with installation marking, suitable for 14 mm wall plugs, eyelet outer diameter 40 mm, inner diameter 23 mm, shaft diameter 12 mm. The length indicated refers to the shaft including thread from lower edge of eyelet. Tested quality: Made in Germany.

Info	kg	Pack	Part No.	for order volume of: €/each		
L: 90 mm	0.16	150	00290	1: 0.85	300: 0.70	1200: 0.65
L: 120 mm	0.18	100	00291	1: 0.90	300: 0.75	1200: 0.70
L: 160 mm	0.21	100	00292	1: 1.00	300: 0.85	1200: 0.80
L: 190 mm	0.24	100	00293	1: 1.20	300: 0.95	1200: 0.90
L: 230 mm	0.27	100	00294	1: 1.35	300: 1.05	1200: 1.00
L: 300 mm	0.33	50	00295	1: 1.60	150: 1.30	600: 1.20
L: 350 mm	0.37	25	00296	1: 1.80	100: 1.40	300: 1.30

Weitere Ausführungen auf Anfrage



#### Nylon wall plug

Polyamide, Made in Germany. Ø 14 mm for 12 mm screws. Length 70 mm.

The weight indicated refers to 250 pieces.

H/L x B (m)	kg	Pack	Part No.	for order volume of: €/each		
0.07 x 0.02	1.45	250	01226	1: 0.15	250: 0.10	500: 0.09

SNP

Other models on request



#### Covering cap white/transparent

Circular lamellas, length 40 mm for 14 mm wall plug. The weight indicated refers to 100 pieces.


Info	kg	Pack	Part No.	for order volume of: €/each		
white-transparent	0.20	100	01178	1: 0.10	100: 0.07	1000: 0.06

SNP

Other models on request



Matching Keder tarpaulins on request.

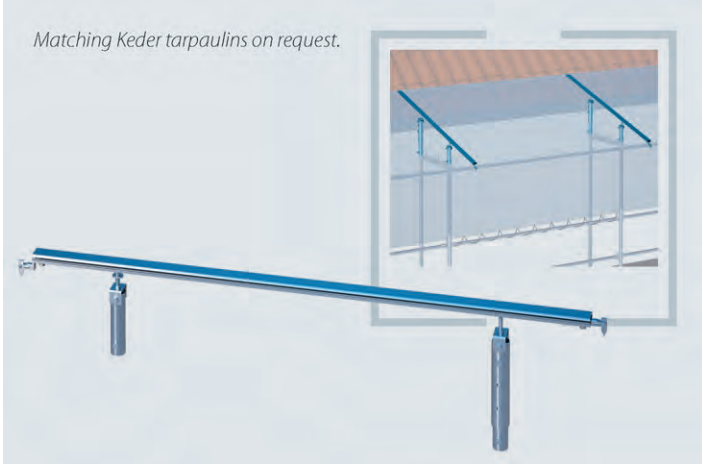


#### Weather protection transom with telescopic tube

Optimal weather protection solution for the uppermost scaffold level. Simple to fit using adjustable extension tubes. Flexible fitting to suit various circumstances prevailing around the roof and eaves of buildings. Fits for all scaffolding systems and widths in combination with simple scaffold sheeting or special PVC Keder tarpaulins. Back guardrails are necessary for stabilisation (see RUX-SUPER façade scaffolding system price list).

H/L x B (m)	kg	Pack	Part No.	for order volume of: €/each		
1.80	4.50	1	05508	1: 142.50	5: 135.00	10: 118.50 ②

SNP

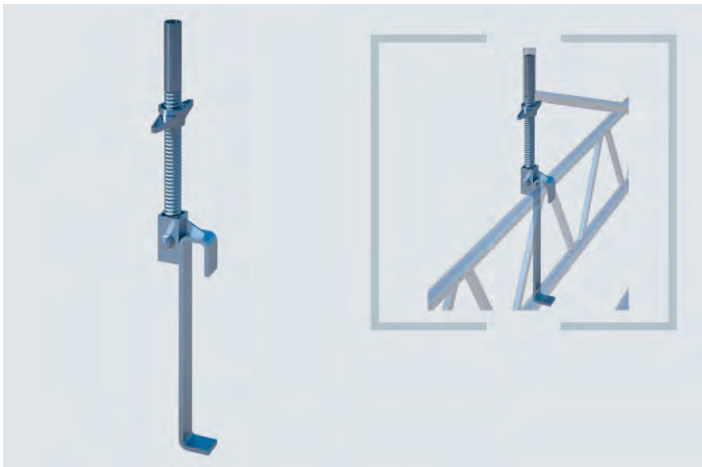


#### Adapter for vertical frames on lattice girder bridges

For the safe and rapid assembly of vertical frames or modular standards on lattice girders. Suitable for all conventional scaffolding systems and lattice girders with an installation height of 0.45 m. Self-securing structure with threaded spindle for height adjustment. Diameter of the spindle: 38 mm; length of the spindle: 500 mm.

H/L x B (m)	kg	Pack	Part No.	for order volume of: €/each		
	5.90	1	00638	1: 50.10	4: 35.40	12: 32.70

SNP

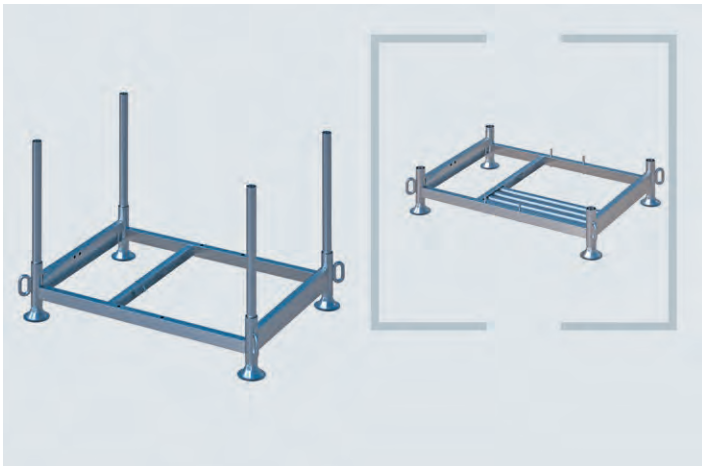

#### Duralok stacking rack, collapsible


Simple principle – numerous uses. Space-saving when not in use as it is collapsible. Consists of a base frame and four insertion tubes (diameter 48.3 mm). The insertion tubes can be substituted by longer ones when need be. Designed for fork-lift loading and crane transport. Stackable thanks to the large circular feet that also prevent any sinking into soft ground and offer protection for the contact surface. Payload 1,500 kg; with 4 crane lugs.

Rollers 10 kN (Art. No. 05507) can be used to make the rack manoeuvrable.

Duralok side sections (Art. No. E08SR0035) for small parts available as an option.

H/L x B (m)	kg	Pack	Part No.	for order volume of: €/each		
1.25 x 0.85	45.60	20	E08SR0032	1: 240.00	10: 149.50	50: 139.50

SNP

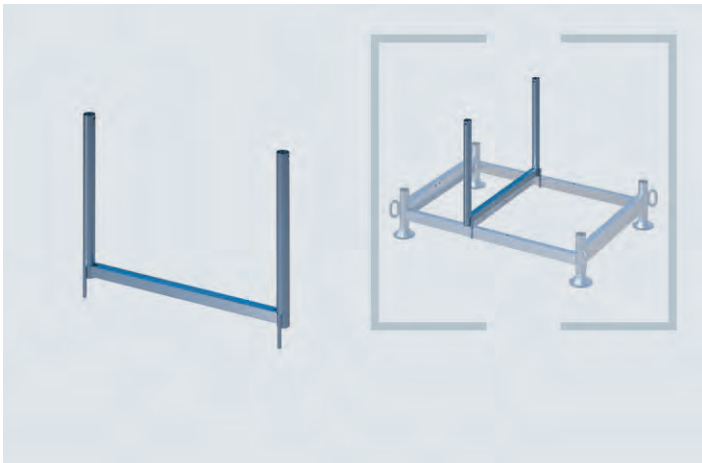

#### Central insertion frame

An intermediate element for the Duralok stacking rack for the storage and secure transport of short scaffold parts.

H/L x B (m)	kg	Pack	Part No.	for order volume of: €/each		
0.85	7.00	1	E08SR0034	1: 28.00	5: 23.80	10: 21.40 ①


SNP



#### Euro-Pool DB mesh box pallet

Europe-wide exchangeable standard mesh box with wooden floor (EPAL guidelines). 2 side flaps for individual removal. Colour: grey.

H/L x B (m)	kg	Pack	Part No.	for order volume of: €/each		
1.24 x 0.84	70.00	1	04856	1: 248.00	5: 189.00	10: 175.00 ②

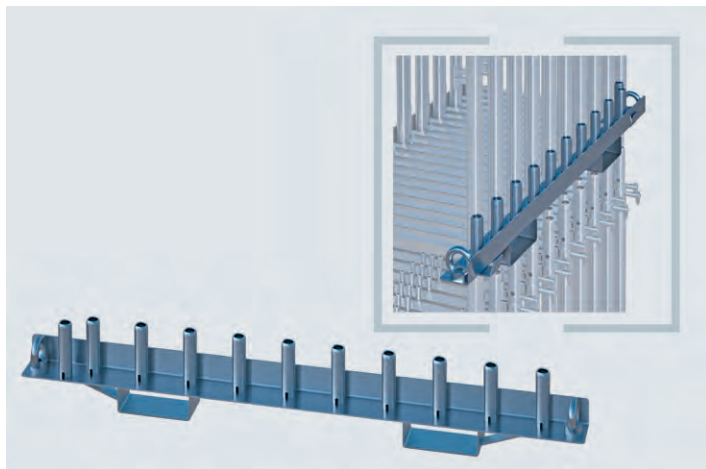

#### Stacking grid for all scaffolding systems

For 20 vertical frames. Establishes order and provides for a clear overview in terms of storage and transport. Suitable for cranes as well as fork-lifts. Fits for all vertical frames with a tube diameter of 48.3 mm. 2 pieces are required at all times.

H/L x B (m)	kg	Pack	Part No.	for order volume of: €/each		
1.57 x 0.10	16.80	2	01533	1: 120.20	10: 104.75	20: 98.40 ②

SNP



#### Support profile for stacking grid

In combination with the stacking grids, this article allows 2 or 3 units to be stacked on top of each other. Four pieces are required and they are positioned at the corners and attached to the tube connectors on the vertical frames.

H/L x B (m)	kg	Pack	Part No.	for order volume of: €/each		
1.50	1	01534	1: 19.50	20: 17.90	100: 16.90	②

SNP

Other models on request



### Blocks of concrete ballast

Enormous diversity, looks good, perfect product design.

Uses: scaffold ballast, protective barrier, cable bridge, advertising medium, building-site safety etc.

The numerous connection alternatives as well as the product design, allowing for a combination of several blocks to a much larger unit, enable a diverse range of applications for events and construction sites. Optimally used as a ballast for freestanding scaffold structures. Here, too, given the many connection possibilities, new options present themselves for making effective use of ballast.

Blocks are available in 600 kg and 1,000 kg alternatives.

Concrete quality: high-performance min. C55/67

Density of normal concrete: 2.4 kg/dm

Surface: exposed concrete

Recommendation: combine a max. of 3 blocks vertically

#### Features:

Crane lugs, fork-lift capability

Spindles or castors can be fitted

Vertical combination since the blocks interlock with one another or from inserting scaffold tubes through the central scaffold tube opening

Horizontal connection with scaffold tubes

Combinable with scaffolding elements such as e.g. lattice girders

An adapter plate for the central attachment of square elements is optionally available

#### Advertising:

Can be supplied in RAL colours


Stickers with company logo available

H/L x B (m)	kg	Pack	Part No.	for order volume of: €/each		
0.80 x 0.80	600.00	1	07047	1: 645.00	10: 489.00	20: 449.00 ①
0.90 x 0.90	1,000.00	1	07053	1: 744.60	10: 595.00	20: 525.00

SNP

NEW

### SMART DETAILS



**Modular** – The blocks ideally interlock with one another and can be combined vertically or horizontally to form stable units by using the integrated tube holding fixtures.



**Practical** – Blocks can be adapted to every scaffolding situation thanks to their many connection options and add-on possibilities – fork-lift optimised. Blocks have a weight

of one tonne and can be perfectly integrated into a company's corporate design through stickers bearing the company's logo or by applying individual colouring.



### K++ proof of ownership

Individual and simple proof of ownership for new and existing material. Most stickers can be removed from smooth surfaces quite simply, which makes them unsuitable as proof of ownership.

By contrast, our K++ sticker adheres extremely well to the substrate. Moreover, it cannot be removed in one piece, but only in mini shreds. Please request our print requirements should you be interested:

4-colour digital print (CMYK)

160 mm x 50 mm (min. quantity 3,000 pieces)

160 mm x 100 mm (min. quantity 5,000 pieces)

Approx. 5 years UV-resistant

Info	H/L x B (m)	kg	Pack	Part No.	€/each
	0.16 x 0.05	0.01	3000	07241	①
	0.16 x 0.10	0.01	5000	07242	①

NEW





#### Kask helmet Plasma AQ

Comfortable work safety helmet:

- High-density, impact-resistant outer shell with drip edge
- 390 g light
- 10 air slits for particularly good ventilation
- Protected by a high-strength, aluminium mesh
- Adjustment by means of hand wheel with rubberised outer ring for enhanced grip
- Adapter clips on the outer shell for the attachment of accessories such as headlamps and various visors
- Internal padding can be washed at 30°
- Anti-allergic fabric with polygiene treatment prevents the growth of bacteria and bad odours
- Individually adjustable chinstrap with 4 anchor points
- Ring on chinstrap for attachment to belt or work gear
- Universally adjustable from 51 - 63 cm
- Corresponds to EN 397

Info	H/L x B (m)	kg	Pack	Part No.	€/each
white		0.56	1	07133	63.00 ②
yellow		0.56	1	07170	63.00 ②
orange		0.56	1	07171	63.00 ②
red		0.56	1	07172	63.00 ②
green		0.56	1	07173	63.00 ②
british green		0.56	1	07175	63.00 ②
light blue		0.56	1	07176	63.00 ②
blue		0.56	1	07177	63.00 ②
black		0.56	1	07178	63.00 ②

SNP




#### HF-Scaff pro PSA set Höhenfreak

Designed for scaffolding construction. Consisting of: safety harness, lanyard 2.0 m, back extension 0.60 m, stowage bag.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
				06210	249.00

SNP

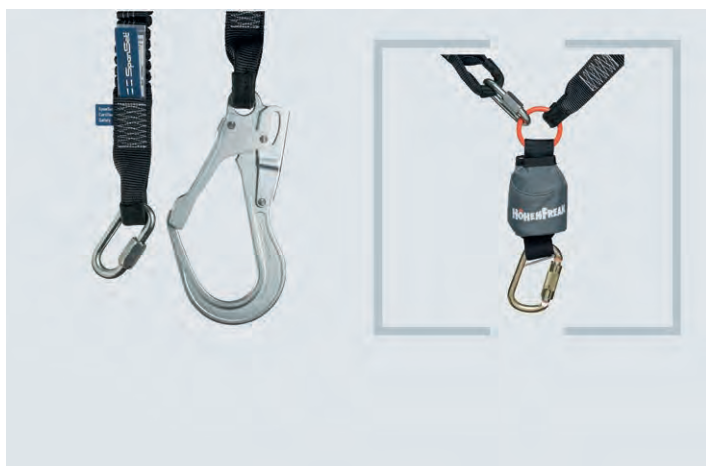

#### HF-Scaff pro Y-connector

Attaches to the lanyard's connecting ring with a screw snap hook Easy to retrofit to a Y-solution.

Info	H/L x B (m)	kg	Pack	Part No.	€/each
				06215	49.00





Many safety harness solutions on the market have been developed as a universal solution for very different occupational groups and applications. Scaffolding then somehow fitted into the concept - or not.

The result was often products that worked, but were hardly ever adapted to the needs of scaffolders.

**This Höhenfreak-harness ticks differently - conceived and designed for scaffolding!**

This harness combines many useful details for scaffolding construction and the cool design is only available from Scafom-rux.

DESIGNED FOR SCAFFOLDING


# HF-140 SAFETY HARNESS

PRODUCT ON PAGE 54



## PRICE EXAMPLE:

SUPER 65  
 SCAFFOLD BAY  
 LENGTH 2.50 M

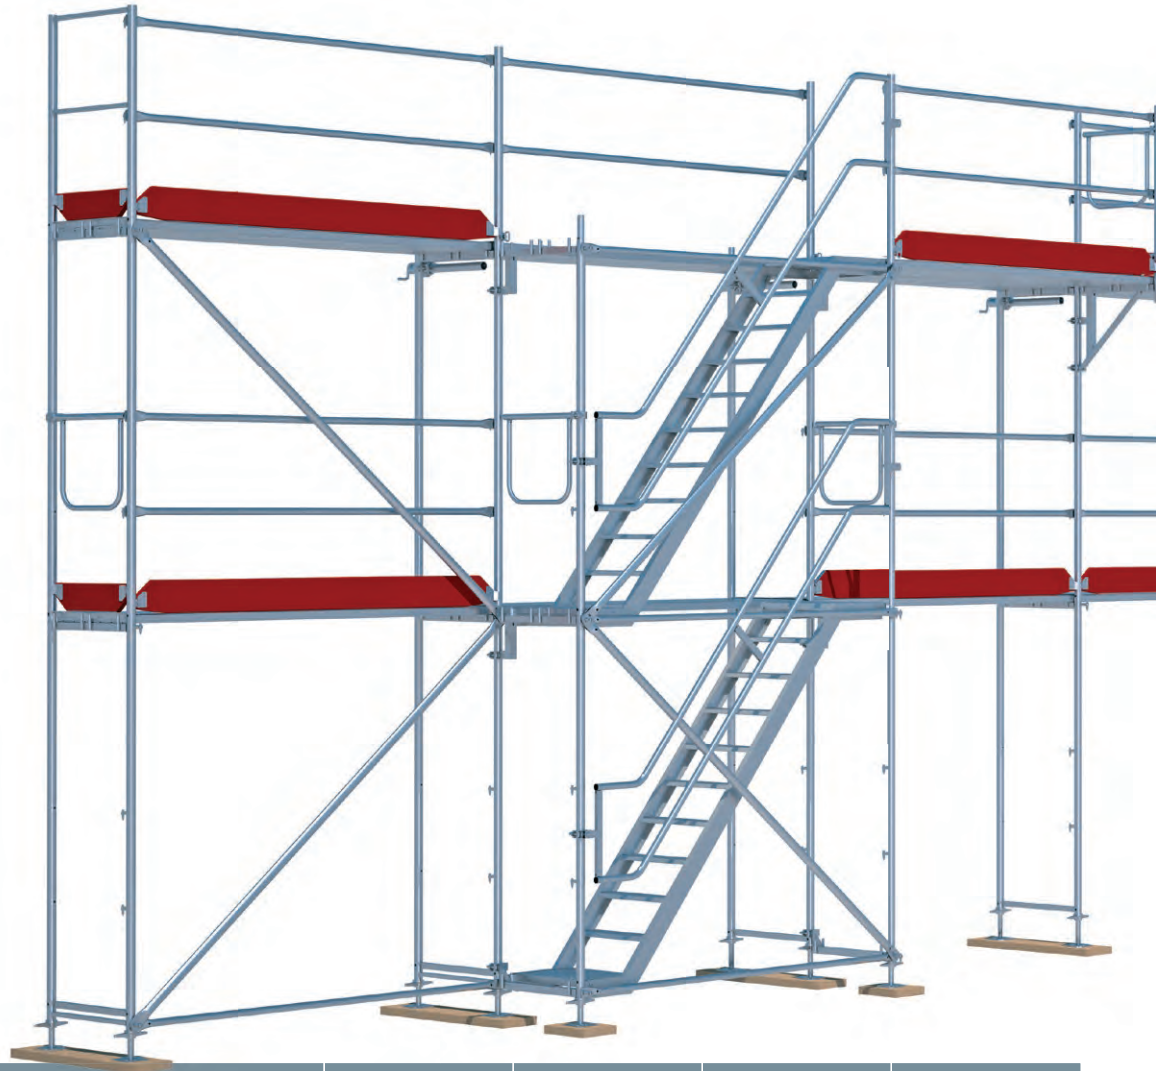

Scaffold area				
Scaffold area in m <sup>2</sup>		1.020	510	103
Scaffold length x working height in m		100.00 x 10.20	50.00 x 10.20	12.50 x 8.20



Basic equipment	Article No.			
Vertical steel frame 2.00 x 0.65 m	01538	164	84	18
Wooden plank 2.50 x 0.29 m	01141	320	160	30
Diagonal 3.20 m for 2.50 m bay	00610	32	16	3
Back guardrail, 2.50 m, double, for 2 levels	E04AG0010	168	84	21
Toe board, 2.50 m, for 2 levels	01063	80	40	10
Toe board, 0.65 m, for 2 levels	01058	4	4	4
Front guardrail, double, 0.65 m, for 2 levels	01543	2	2	2
Guardrail post	00686	39	19	4
Front guardrail frame 0.65 m	01544	2	2	2
Base transom 0.65 m	00662	16	8	2
Base jack 0.60 m	08358	82	42	12
Total price in EURO		48.013,60	24.322,80	5.238,20
Price per m <sup>2</sup> in EURO		47,07	47,69	51,10

Additional equipment	Article No.			
Back guardrail 2.50 m, double, for all levels	E04AG0010	160	80	10
Toe board 2.50 m for all levels	01063	80	40	5
Toe board 0.65 m for all levels	01058	4	4	2
Front guardrail, double, 0.65 m for all levels	01543	4	4	2
Aluminium ladder frame - robust, 2.50 m with ladder	04741	4	4	3
Total price in EURO		54.418,80	28.080,00	6.354,20
with the deduction of 2 decking planks for each aluminium ladder frame				
Weight in kg		11.908,20	6.061,00	1.275,30



**PRICE EXAMPLE:**


SUPER 65  
SCAFFOLD BAY LENGTH 3.00 M

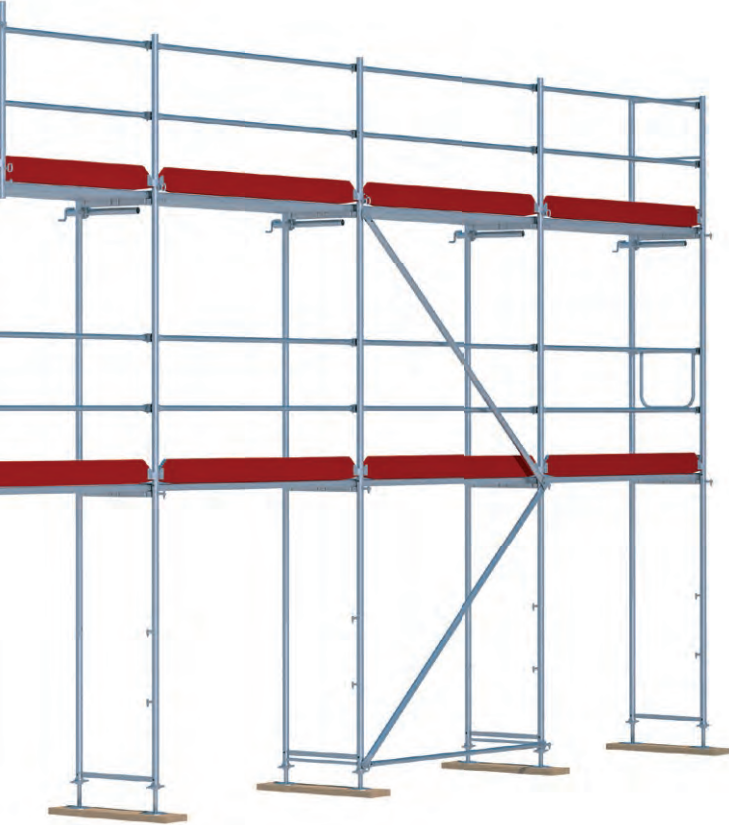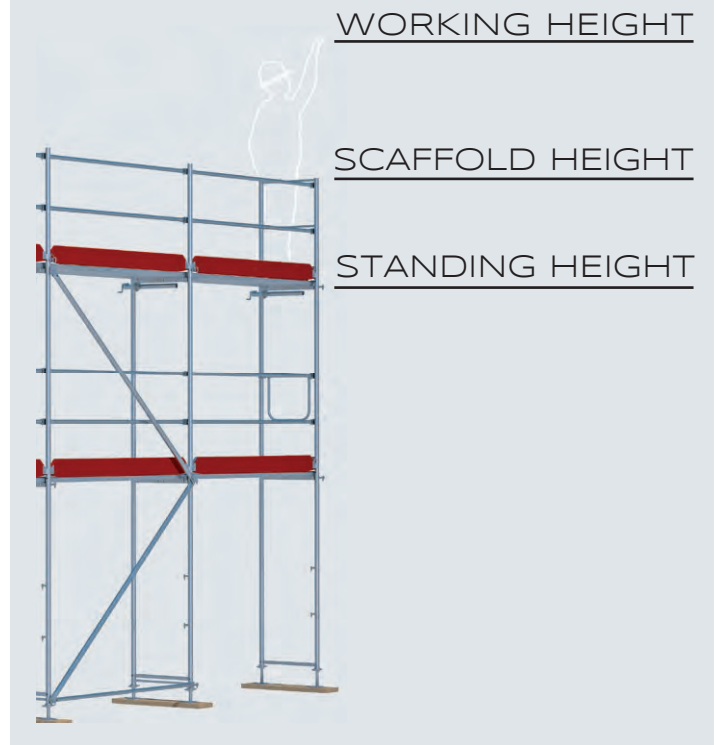**MEASURE CORRECTLY:**

Scaffold area				
Scaffold area in m <sup>2</sup>		1.010	520	98
Scaffold length x working height in m		99.00 x 10.20	51.00 x 10.20	12.00 x 8.20


Basic equipment	Article No.			
Vertical steel frame 2.00 x 0.65 m	01538	136	72	15
Wooden plank 3.00 x 0.29 m	01142	264	136	24
Diagonal 3.60 m for 3.00 m bay	00611	28	16	3
Back guardrail, 3.00 m, double, for 2 levels	E04AG0017	139	72	17
Toe board, 3.00 m, for 2 levels	01064	66	34	8
Toe board, 0.65 m, for 2 levels	01058	4	4	4
Front guardrail, double, 0.65 m, for 2 levels	01543	2	2	2
Guardrail post	00686	32	16	3
Front guardrail frame 0.65 m	01544	2	2	2
Base transom 0.65 m	00662	14	8	2
Base jack 0.60 m	08358	68	36	10
Total price in EURO		36,817.30	18,659.30	4,042.90
Price per m <sup>2</sup> in EURO		36.10	36.59	39.25

Additional equipment	Article No.			
Back guardrail, 3.00 m, double, for all levels	E04AG0017	132	68	8
Toe board, 3.00 m, for all levels	01064	66	34	4
Toe board, 0.65 m, for all levels	01058	4	4	2
Front guardrail, double, 0.65 m, for all levels	01543	4	4	2
Aluminium ladder frame - robust, with ladder	04742	4	4	3
Total price in EURO		49.194,50	26.306,60	5.787,00
with the deduction of 2 decking planks for each aluminium ladder frame				
Weight in kg		11.074,00	5.836,40	1.181,70

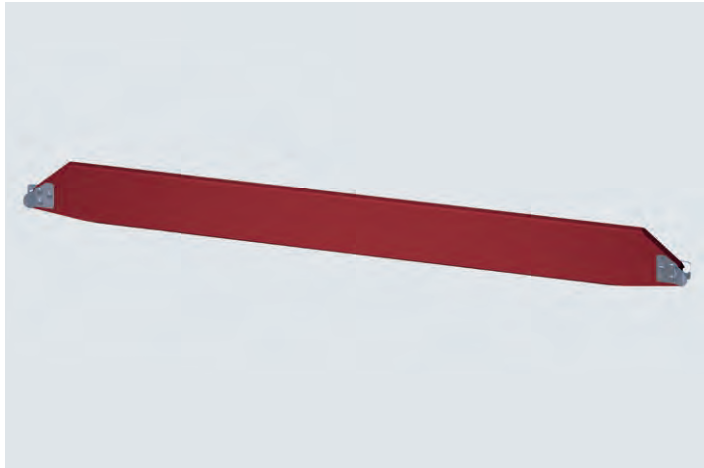


**Spare parts: toe boards**

Art. No.	Article designation	Quantity per toe board	Prices on request
00527	Toe board fittings, galvanised, angled to left inside	1	①
00528	Toe board fittings, galvanised, angled to right inside	1	①
00529	Toe board fittings, galvanised, angled to left outside	1	①
00530	Toe board fittings, galvanised, angled to right outside	1	①
00535	Rivet for toe board fittings 8 x 40 mm DIN 660	6	①

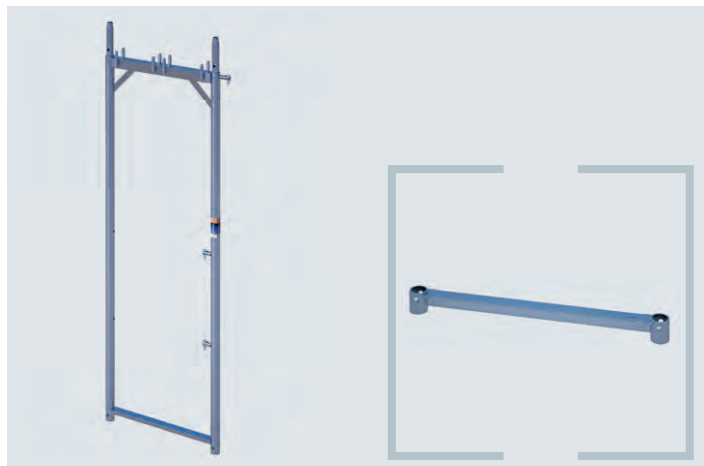


**Spare parts: vertical frames / back guardrail / diagonals with gravity lock**

Article No.	Article designation	Prices on request
00551	Back guardrail gravity lock plate, untreated	
00564	Tongue for diagonal gravity lock bolt and back guardrail gravity lock plate	
00546	Blind rivet 5 x 18 mm for tongue for back guardrail gravity lock plate	
00557	Screw, self-cutting, M6 x 16 semi-circular head for back guardrail gravity lock plate	
00547	Diagonal gravity lock bolt 20 x 60 mm, untreated	
05492	Spring pin 6 x 18 mm for tongue for diagonal gravity lock bolt and back guardrail gravity lock plate	
00549	Back guardrail gravity lock, complete, for screw-mounting	
00555	Pins for deck attachment, untreated	
00825	T-profile 0.65 m, untreated, for vertical frame (cross bar)	
00822	T-profile 1.00 m, untreated, for vertical frame (cross bar)	
01540	Repair transom for vertical frame SUPER 65	
01555	Repair transom for vertical frame SUPER 100	

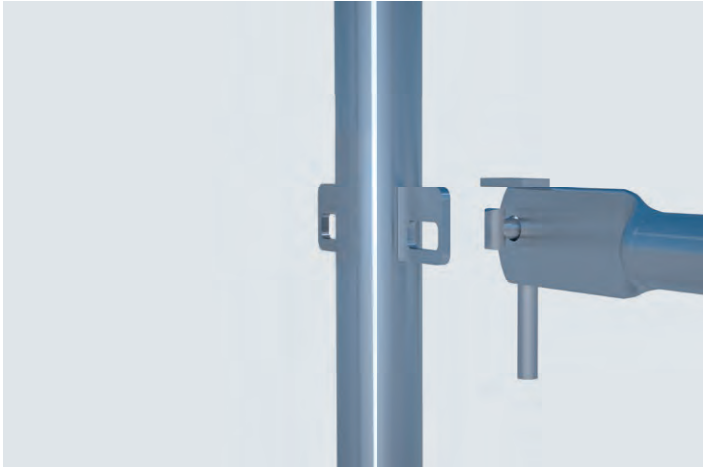
**Spare parts: vertical frames / guardrails with lugs**

Art. No.	Article designation	Prices on request
00541	Toggle bolt	
00544	Spring pin 5 x 28 mm for toggle bolt	
00573	Guardrail lug, untreated	
01030	Aluminium guardrail lug	
00563	Tongue for front guardrail, basic	
00542	Semi-circular head rivet 5 x 20 mm DIN 660 for front guardrail, basic	

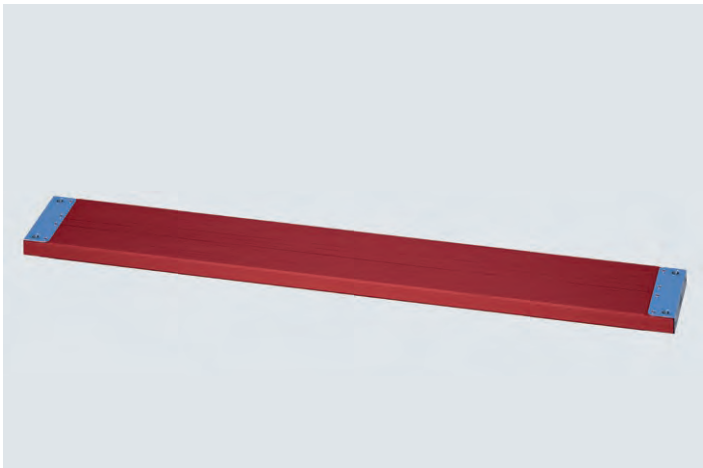**Spare parts: decks**


Article No.	Article designation	Quantity per deck	Prices on request	
00554	U-shaped fitting for wooden deck	2		①
00559	Sleeve for U-shaped fitting (small) 8 x 0.75 x 52 mm	8		①
00560	Sleeve for U-shaped fitting (large) 22 x 1 x 50 mm	4		①



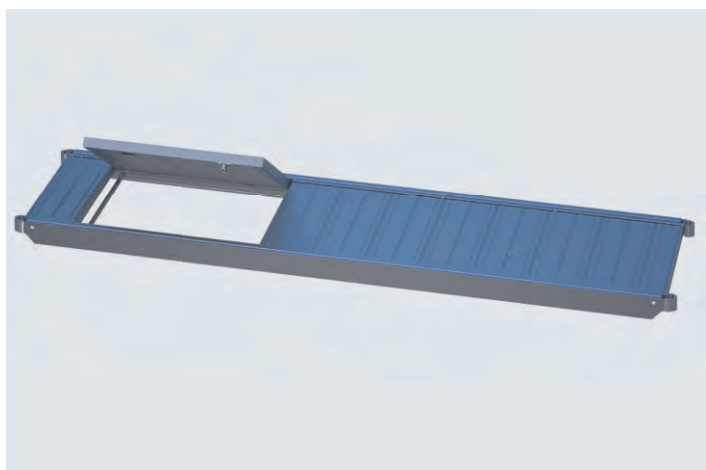

**Spare parts**  
**Aluminium ladder frames**  
**without ladder 2.00 m entirely out of aluminium**  
**Art. No. 04726**

Article No.	Article designation	Quantity per ladder frame	Prices on request	
04730E	Aluminium hatch 698 x 495 x 35 mm hollow box profile for aluminium ladder frame	1		①
05235E	Hinge 100 x 40.5 / 40.5 x 2 mm for aluminium ladder frame	2		①
05204N	Blind rivet 4,8 x 17 mm for mounting hinge for mounting panels for mounting retaining straps for mounting hatch latching mechanism	20 20 4 4		①
05530E	Hatch latching mechanism with grip hole for aluminium ladder frame	1		①
05025N	Retaining strap for ladder frame hatch	2		①

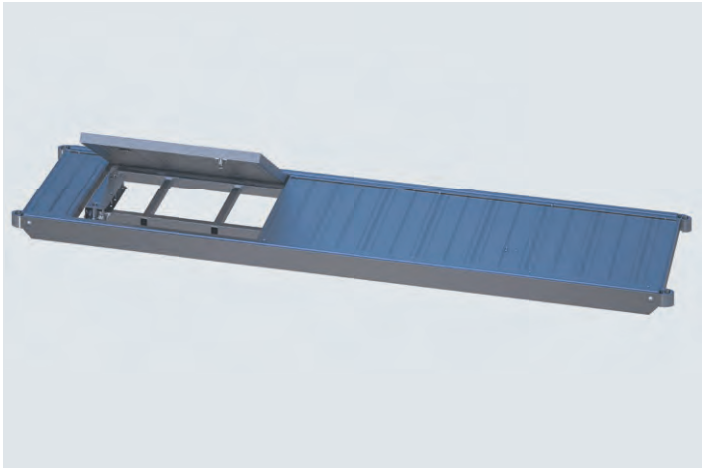


**Spare parts**  
**Aluminium ladder frame**  
**with ladder 2.50 m entirely out of aluminium**  
**Art. No. 04727**

Article No.	Article designation	Quantity per ladder frame	Prices on request	
04730E	Aluminium hatch 698 x 495 x 35 mm hollow box profile for aluminium ladder frame	1		①
05235E	Hinge 100 x 40.5 / 40.5 x 2 mm for aluminium ladder frame	2		①
05204N	Blind rivet 4.8 x 17 mm for mounting panels for mounting hinge for mounting retaining straps for mounting hatch latching mechanism for mounting ladder latching device	24 20 4 4 4		①
05303N	Blind rivet 6 x 25 mm for mounting ladder latching device	4		①
05530E	Hatch latching mechanism with grip hole for aluminium ladder frame	1		①
05067N	Aluminium support profile for aluminium ladder frame	1		①
00854N	Steel shaft Ø 17 mm for ladder Art. No. 04831	1		①
04831E	Aluminium access ladder for aluminium ladder frame	1		①
00856E	Ladder latching device for aluminium ladder frame with drill hole for rivets 4.8 mm	1		①
00856N	Ladder latching device for aluminium ladder frame with drill hole for rivets 6 mm	1		①
05299N	Ladder latching device for aluminium ladder frame with blue head caps in cover & with drill hole for rivets 4.8 mm	2		①
05025E	Retaining strap for ladder frame hatch	2		①

**Spare parts**  
**Aluminium ladder frame**  
**with ladder 3.00 m entirely out of aluminium**  
**Art. No. 04728**


Article No.	Article designation	Quantity per ladder frame	Prices on request	
04730E	Aluminium hatch 698 x 495 x 35 mm hollow box profile for aluminium ladder frame	1		①
05235E	Hinge 100 x 40.5 / 40.5 x 2 mm for aluminium ladder frame	2		①
05204N	Blind rivet: for affixing panels for affixing hinges for affixing straps for affixing hatch latches for affixing ladder latches	28 20 4 4 4		①
05303N	Blind rivet 6 x 25 mm for mounting ladder latching device	4		①
05530E	Hatch latching mechanism with grip hole for aluminium ladder frame	1		①
00854N	Steel shaft Ø 17 mm for ladder Art. No. 04831	1		①
04831E	Aluminium access ladder for aluminium ladder frame	1		①
00856E	Ladder latching device for aluminium ladder frame with drill hole for rivets 4.8 mm	1		①
00856N	Ladder latching device for aluminium ladder frame with drill hole for rivets 6 mm	1		①
05299N	Ladder latching device for aluminium ladder frame with blue head caps in cover & with drill hole for rivets 4.8 mm	1		①
05025E	Retaining strap for ladder frame hatch	2		①

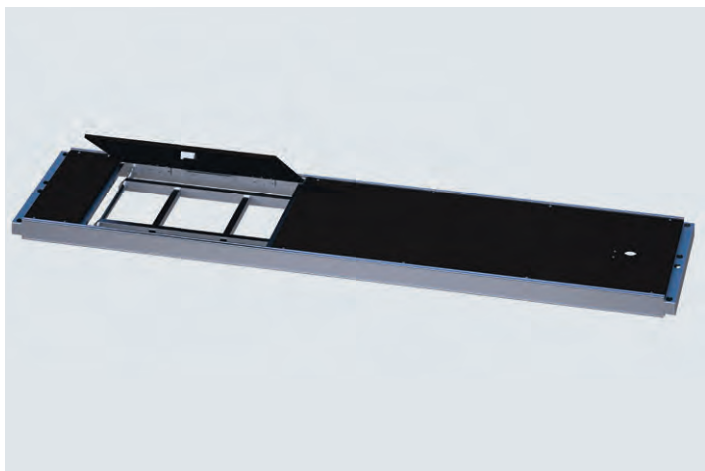

**Spare parts**  
**Aluminium ladder frame**  
**with ladder 2.50 m, plywood**  
**Art. No. 00862**


Article No.	Article designation	Quantity per ladder frame	Prices on request	
07186N	Plywood surface (platform) BFU100G 200 x 544 x 12 mm	1		①
07193N	Plywood surface (platform) BFU100G 200 x 515 x 12 mm	1		①
07184N	Plywood surface BFU100G 797 x 521 x 12 mm	1		①
07185N	Plywood hatch BFU100G 746 x 521 x 12 mm	1		①
04744E	Aluminium hatch out of chequered plate incl. latch and 2 retaining straps 518 x 746 mm	1		①
04747E	Aluminium hatch out of chequered plate incl. latch and 2 retaining straps 518 x 795 mm	1		①
07191N	Plywood hatch BFU100G 800 x 515 x 12 mm	1		①
07182N	Plywood surface BFU100G 1440 x 544 x 12 mm	1		①
07183N	Plywood surface BFU100G 1396 x 544 x 12 mm	1		①
07187N	Plywood surface BFU100G 1590 x 515 x 12 mm for ladder frame without platform	1		①
07188N	Plywood surface BFU100G 1335 x 515 x 12 mm for ladder frame with platform	1		①
05302N	Replacement profile out of aluminium, length 544 mm x 254.5 mm	7		①
05300N	Replacement profile out of aluminium, length 515 mm x 254.5 mm	7		①
00852E	Hinge 117 x 100 x 2.5 mm for aluminium ladder frame with plywood hatch	2		①
05203N	Blind rivet 4.8 x 25 mm for mounting hinge on frame for mounting panels for mounting replacement profile	10 12 16		①
05204N	Blind rivet 4.8 x 17 mm for mounting hinge on hatch for mounting ladder latching device for mounting hatch latching mechanism for mounting retaining strap	10 4 4 4		①
05303N	Blind rivet 6 x 25 mm for mounting ladder latching device	4		①
00861N	Hatch latching mechanism for ladder frame with plywood surface	1		①
05530E	Hatch latching mechanism with grip hole for ladder frame	1		①
05067N	Aluminium support profile for ladder frame	1		①
04746E	Aluminium shaft Ø 20 mm for aluminium access ladder incl. 2 washers and 2 locking pins	1		①
00854N	Steel shaft Ø 17 mm for ladder Art. No. 04831	1		①
04831E	Aluminium access ladder with welded rungs for ladder frame	1		①
04831N	Aluminium access ladder with compressed rungs for ladder frame	1		①
00856E	Ladder latching device for ladder frame with drill hole for rivets 4.8 mm	1		①
00856N	Ladder latching device for ladder frame with drill hole for rivets 6 mm	1		①
05025E	Retaining strap for ladder frame hatch	2		①



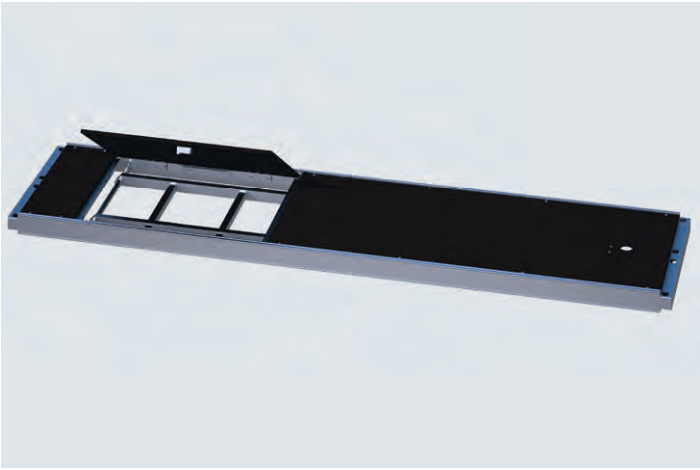

**Spare parts**  
**Aluminium ladder frame**  
**with ladder 3.00 m, plywood**  
**Art. No. 00865**


Article No.	Article designation	Quantity per ladder frame	Prices on request	
07186N	Plywood surface (platform) BFU100G 200 x 544 x 12 mm	1		①
07193N	Plywood surface (platform) BFU100G 200 x 515 x 12 mm	1		①
07184N	Plywood hatch BFU100G 797 x 521 x 12 mm	1		①
07185N	Plywood hatch BFU100G 746 x 521 x 12 mm	1		①
04744E	Aluminium hatch out of chequered plate incl. latch and 2 retaining straps 518 x 746 mm	1		①
04747E	Aluminium hatch out of chequered plate incl. latch and 2 retaining straps 518 x 795 mm	1		①
07191N	Plywood hatch BFU100G 800 x 514 x 12 mm	1		①
07180N	Plywood surface BFU100G 1896 x 544 x 12 mm	1		①
07181N	Plywood surface BFU100G 1940 x 544 x 12 mm	1		①
07189N	Plywood surface BFU100G 2090 x 515 x 12 mm for ladder frame without platform	1		①
07190N	Plywood surface BFU100G 1835 x 515 x 12 mm for ladder frame with platform	1		①
05302N	Replacement profile out of aluminium, length 544 mm x 254.5 mm	9		①
00852E	Hinge 117 x 100 x 2.5 mm for aluminium ladder frame with plywood hatch	2		①
05203N	Blind rivet 4.8 x 25 mm for mounting hinge on frame for mounting panels for mounting aluminium replacement profile 10x fastening hinge for mounting panels for mounting aluminium replacement profile	10 14 20 14 20		①
05204N	Blind rivet 4.8 x 17 mm for mounting hinge on hatch for mounting ladder latching device for mounting hatch latching mechanism for mounting retaining strap	10 4 4 4		①
05303N	Blind rivet 6 x 25 mm for mounting ladder latching device	4		①
00861N	Hatch latching mechanism for ladder frame with plywood surface	1		①
05530E	Hatch latching mechanism with grip hole for ladder frame	1		①
05068N	Ball studs with nut for plywood hatch	1		①
05069N	Spring for plywood hatch	1		①
05067N	Aluminium support profile for ladder frame	1		①
04746E	Aluminium shaft Ø 20 mm for access ladder incl. 2 washers and 2 locking pins	1		①
00854N	Steel shaft Ø 17 mm for ladder Art. No. 04831	1		①
04831E	Aluminium access ladder with welded rungs for ladder frame	1		①
04831N	Aluminium access ladder with crimped rungs for ladder frame	1		①
00856E	Ladder latching device for ladder frame with drill hole for rivets 4.8 mm	1		①
00856N	Ladder latching device for ladder frame with drill hole for rivets 6 mm	1		①
05025E	Retaining strap for ladder frame hatch	2		①
05039N	Flat aluminium bar 30 x 3 x 515 mm for reinforcement of 3 m plywood surface decks	1		①

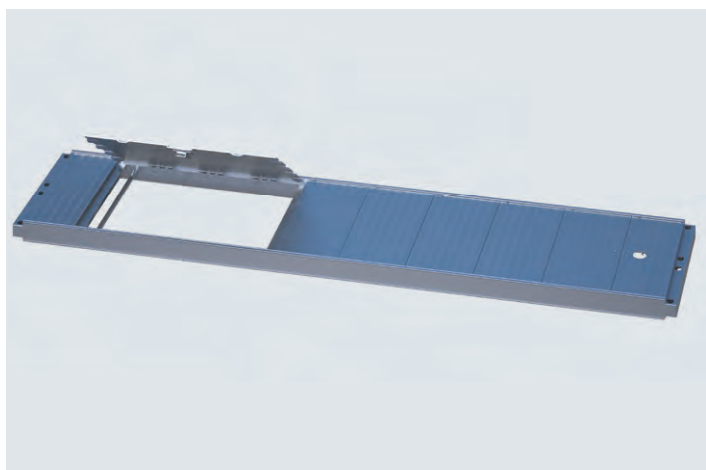

#### Spare parts

**Aluminium ladder frame 2.00 m, with aluminium profile surface and aluminium checker plate hatch, without ladder Art. No. 04743**

Article No.	Article designation	Quantity per ladder frame	Prices on request	
05302N	Replacement profile out of aluminium, length 544 mm x 254.5 mm, for ladder frame	5		①
04744E	Aluminium chequered plate hatch incl. latch and 2 retaining belts 518 x 746 mm	1		①
04747E	Aluminium chequered plate hatch incl. latch and 2 retaining belts 518 x 795 mm	1		①
05235E	Hinge 100 x 40.5 / 40.5 x 2 mm for aluminium ladder frame	3		①
05203N	Blind rivet 4.8 x 25 mm for mounting hinge for mounting panels	30 18		①
05204N	Blind rivet 4.8 x 17 mm for mounting hatch latching mechanism for mounting ladder latching device for mounting retaining strap	4 4 4		①
05530E	Hatch latching mechanism with grip hole for ladder frame	1		①
05025E	Retaining strap for ladder frame hatch	2		①

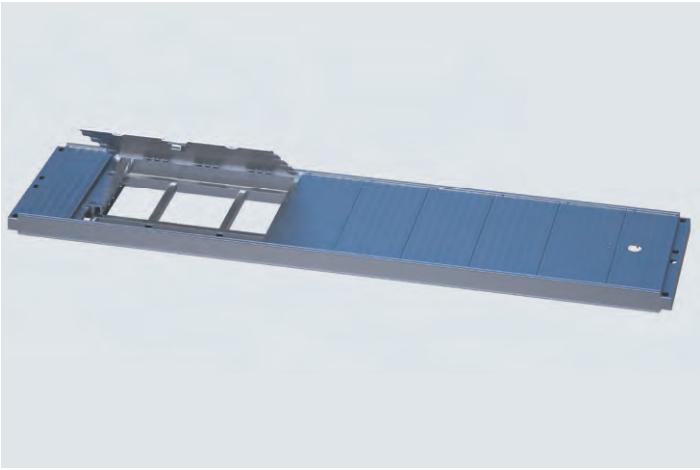**Spare parts**

**Aluminium ladder frame 2.50 m, with aluminium profile surface and aluminium checker plate hatch**

**Art. No. 04741**

Article No.	Article designation	Quantity per ladder frame	Prices on request	
05302N	Replacement profile out of aluminium, length 544 mm x 254.5 mm, for ladder frame	7		①
04744E	Aluminium chequered plate hatch incl. latch and 2 retaining belts 518 x 746 mm	1		①
04747E	Aluminium chequered plate hatch incl. latch and 2 retaining belts 518 x 795 mm	1		①
05235E	Hinge 100 x 40.5 / 40.5 x 2 mm for aluminium ladder frame	3		①
05203N	Blind rivet 4.8 x 25 mm for mounting hinge for mounting panels	30 18		①
05204N	Blind rivet 4.8 x 17 mm for hatch latching mechanism for ladder latching device for retaining strap	4 4 4		①
05303N	Blind rivet 6 x 25 mm for mounting ladder latching device	4		①
05530E	Hatch latching device with grip hole for ladder frame	1		①
04746E	Aluminium shaft Ø 20 mm for aluminium access ladder incl. 2 washers and 2 locking pins	1		①
04831E	Aluminium access ladder with welded rungs for ladder frame	1		①
00856E	Ladder latching device for ladder frame with drill hole for rivets 4.8 mm	1		①
00856N	Ladder latching device for ladder frame with drill hole for rivets 6 mm	1		①
05025E	Retaining strap for ladder frame hatch	2		①

**Spare parts**

**Aluminium ladder frame 3.00 m, with aluminium profile surface and aluminium checker plate hatch**

**Art. No. 04742**


Article No.	Article designation	Quantity per ladder frame	Prices on request	
05302N	Replacement profile out of aluminium, length 544 mm x 254.5 mm, for ladder frame	9		①
04744E	Aluminium chequered plate hatch incl. latch and 2 retaining belts 518 x 746 mm	1		①
04747E	Aluminium chequered plate hatch incl. latch and 2 retaining belts 518 x 795 mm	1		①
05235E	Hinge 100 x 40.5 / 40.5 x 2 mm for aluminium ladder frame	3		①
05203N	Blind rivet 4.8 x 25 mm for mounting hinge for mounting panels	30 22		①
05204N	Blind rivet 4.8 x 17 mm for hatch latching mechanism for ladder latching device for retaining strap	4 4 4		①
05303N	Blind rivet 6 x 25 mm for mounting ladder latching device	4		①
05530E	Hatch latching device with grip hole for ladder frame	1		①
04746E	Aluminium shaft Ø 20 mm for aluminium access ladder incl. 2 washers and 2 locking pins	1		①
04831E	Aluminium access ladder with welded rungs for ladder frame	1		①
00856E	Ladder latching device for ladder frame with drill hole for rivets 4.8 mm	1		①
00856N	Ladder latching device for ladder frame with drill hole for rivets 6 mm	1		①
05025E	Retaining strap for ladder frame hatch	2		①

## ASSEMBLY - FINISHED FAÇADE SCAFFOLDING MADE SIMPLE

Details on how to assemble and on the various applications can be seen in the currently valid versions of our SUPER-65 / SUPER-100 Instructions for Assembly and Use. These can be found in the download section of the **www.scafom-rux.de homepage**.

### FEW MEASUREMENTS, SMOOTH PROCESSES, TOOL-FREE


By resolutely dispensing with screw connections for the most important elements, the RUX SUPER scaffolding system is not only secure in terms of its assembly sequence; the time needed for assembly and disassembly is also considerably reduced. Weight-reduced components additionally safeguard and protect the working effort required by staff.

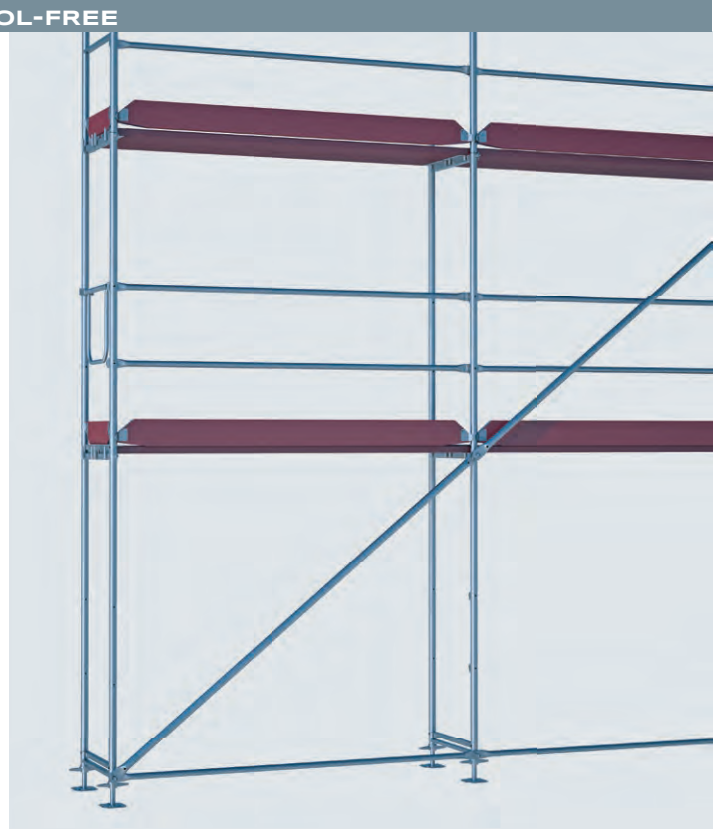

### STEP 1: THE BASIS IS ESTABLISHED

Base jacks are put into their exact positions and heights with the help of base transoms and longitudinal tubes.


The one-time, horizontal alignment of these two axes is already sufficient. The rest of the assembly is automatically perpendicular to this basic one-off levelling process.

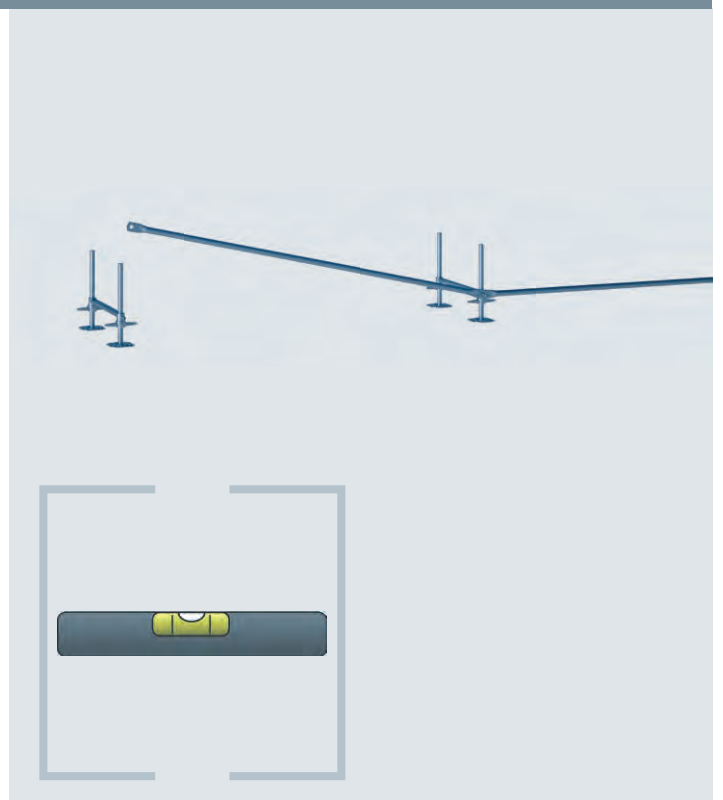




## STEP 2: THE FIRST VERTICAL FRAME

After inserting the vertical frame, it is then connected by means of a diagonal brace. This can be done by simply inserting the diagonal in the gravity lock of the vertical frame.

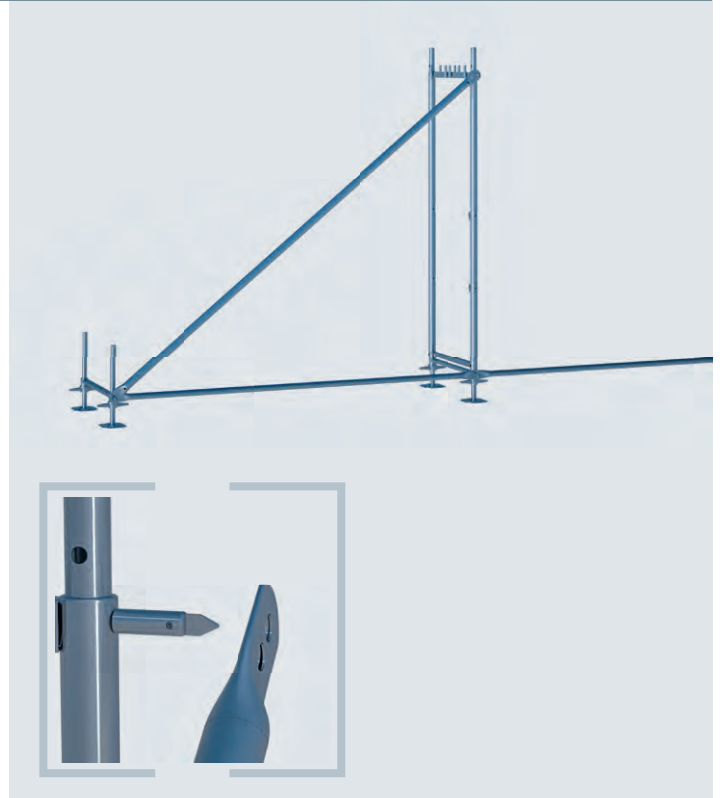

## STEP 3: THE FIRST BAY

After the decks have been inserted into the upper pins on the vertical frames, the scaffolding is already stable. The decks are securely fitted onto the pins of the vertical frames.

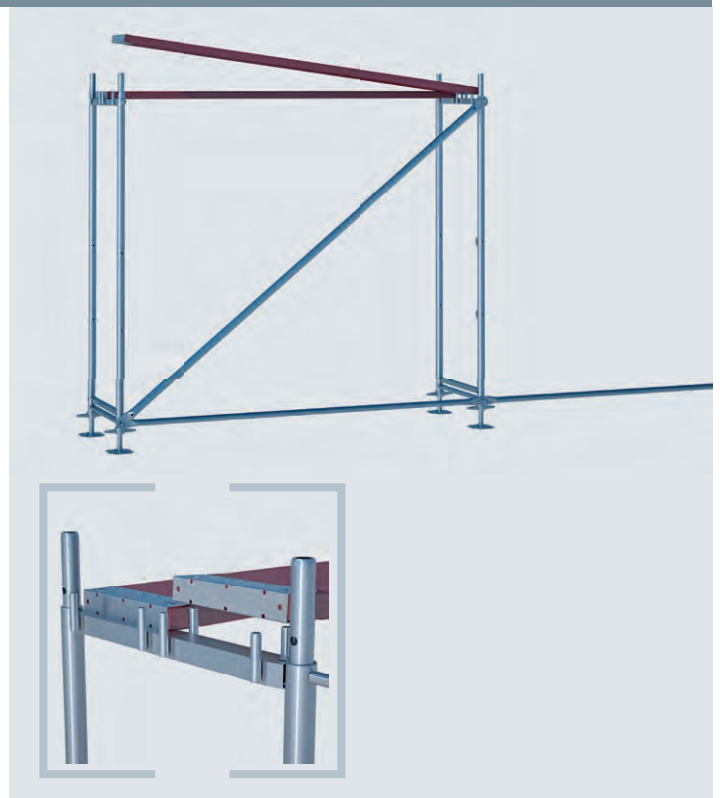

## ASSEMBLY - FINISHED FAÇADE SCAFFOLDING MADE SIMPLE

### STEP 4: ASSEMBLY OF THE SAFETY RAILINGS FOR THE NEXT LEVEL

The assembly of each new level begins with raising the assembly guardrail posts. With telescopic railings already hooked in, the posts are moved upwards over the entire length from the level below. This ensures that the top level already has side protection when stepped on.





### STEP 5: MOUNTING THE VERTICAL FRAMES

Subsequently, the vertical frames are fitted onto the connecting pieces of the frames positioned below. Thanks to the T-profile on the lower end of the vertical frame, the decks beneath are fixed in position and secured against lift.



## STEP 6: DIAGONALS AND SIDE PROTECTION

After fitting the back guardrails, the diagonals and the front guardrails, the front and side toe boards are inserted. Finally, the decks for the third scaffold level are fitted.

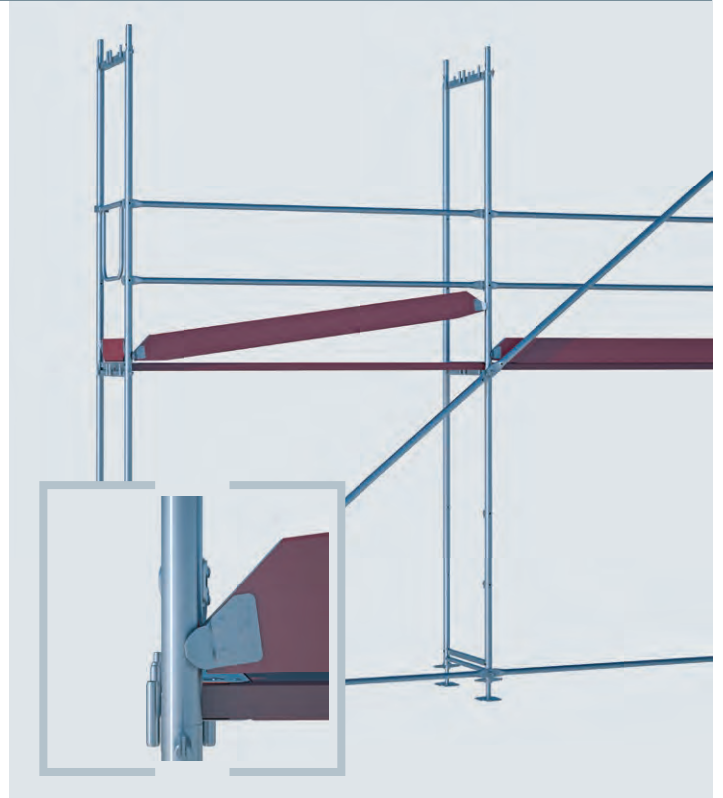

## CAN BE EXTENDED AS REQUIRED




## POSSIBLE USES OF RUX SYSTEM DECKS

### DECKS OUT OF WOOD, STEEL, ALUMINIUM OR AS LADDER FRAMES? **WHAT IS POSSIBLE WHEN!**

**Various materials for the decking** – but always one system. Which system deck can be used in which way is indicated on this double page. Details on the decks can be found in the price list section.


#### Legend

- Use possible
- Use not possible
- Evidenced by drop tests
- Evidenced for 6.00 kN/m<sup>2</sup>; not suitable for section load as per scaffold group 6
- \* Evidenced for 7.50 kN/m<sup>2</sup>; not suitable for section load as per scaffold group 6

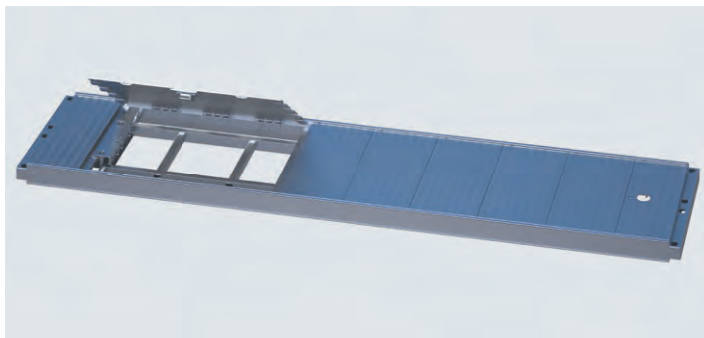


**Aluminium ladder frame - robust**

Dimensions in cm	Scaffold class as per DIN 12810/12811 ff						For catch scaffolds and roof safety systems
	1	2	3	4	5	6	
250 x 60 x 8.9	●	●	●	●	–	–	■
300 x 60 x 8.9	●	●	●	–	–	–	■

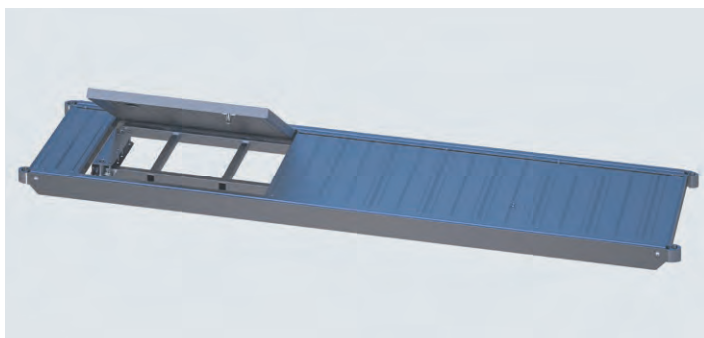


**Aluminium ladder frame**

Dimensions in cm	Scaffold class as per DIN 12810/12811 ff						For catch scaffolds and roof safety systems
	1	2	3	4	5	6	
250 x 60 x 8.9	●	●	●	●	–	–	■
300 x 60 x 8.9	●	●	●	–	–	–	■

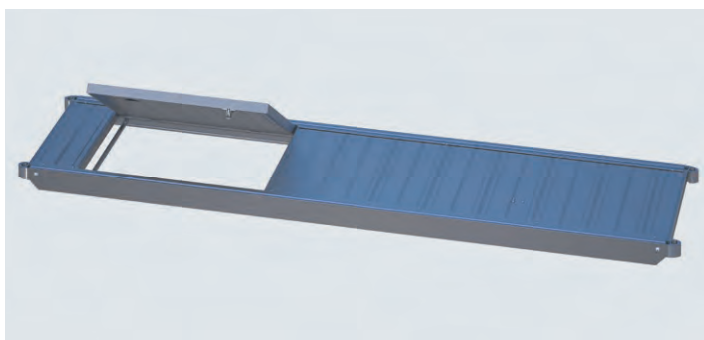

**Aluminium ladder frame**


Dimensions in cm	Scaffold class as per DIN 12810/12811 ff						For catch scaffolds and roof safety systems
	1	2	3	4	5	6	
200 x 60 x 8.9	●	●	●	●	–	–	■

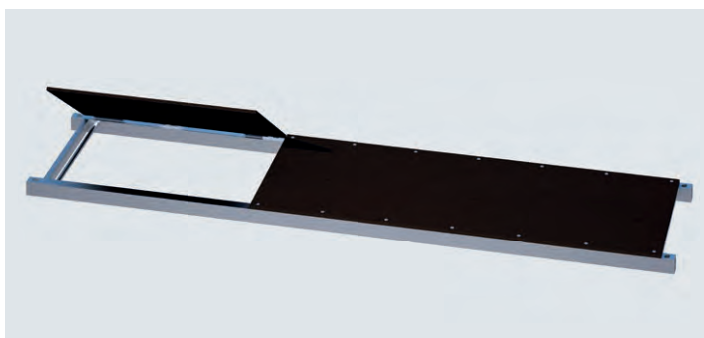


**Steel ladder frame**

Dimensions in cm	Scaffold class as per DIN 12810/12811 ff						For catch scaffolds and roof safety systems
	1	2	3	4	5	6	
250 x 59 x 5.2	●	●	●	●	–	–	■

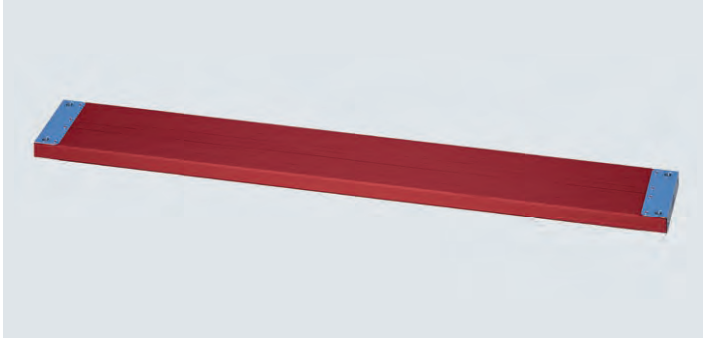


**Wooden plank**


Dimensions in cm	Scaffold class as per DIN 12810/12811 ff						For catch scaffolds and roof safety systems
	1	2	3	4	5	6	
150 x 29 x 4.8	●	●	●	●	●	●	■
200 x 29 x 4.8	●	●	●	●	●	–	■
250 x 29 x 4.8	●	●	●	●	–	–	■
300 x 29 x 4.8	●	●	●	–	–	–	■

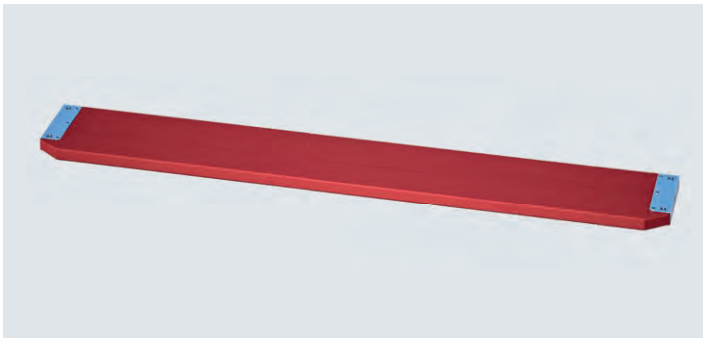**Wooden bracket plank**


Dimensions in cm	Scaffold class as per DIN 12810/12811 ff						For catch scaffolds and roof safety systems
	1	2	3	4	5	6	
100 x 35 x 4.8	●	●	●	–	–	–	■
150 x 35 x 4.8	●	●	●	–	–	–	■
200 x 35 x 4.8	●	●	●	–	–	–	■
250 x 35 x 4.8	●	●	●	–	–	–	■

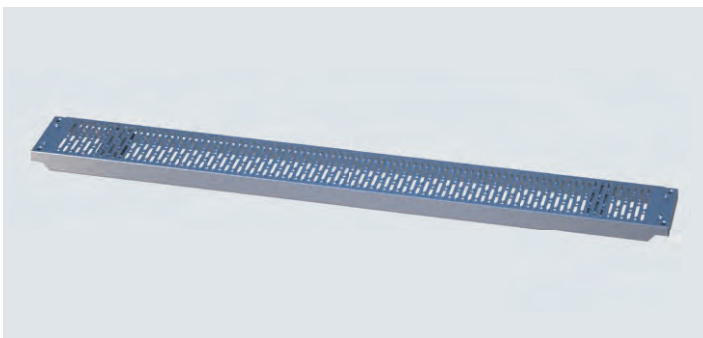**Steel deck**

Dimensions in cm	Scaffold class as per DIN 12810/12811 ff						For catch scaffolds and roof safety systems
	1	2	3	4	5	6	
150 x 29 x 7.0	●	●	●	●	●	●	■
200 x 29 x 7.0	●	●	●	●	●	●	■
250 x 29 x 7.0	●	●	●	●	●	(●)	■
300 x 29 x 7.0	●	●	●	●	–	–	■

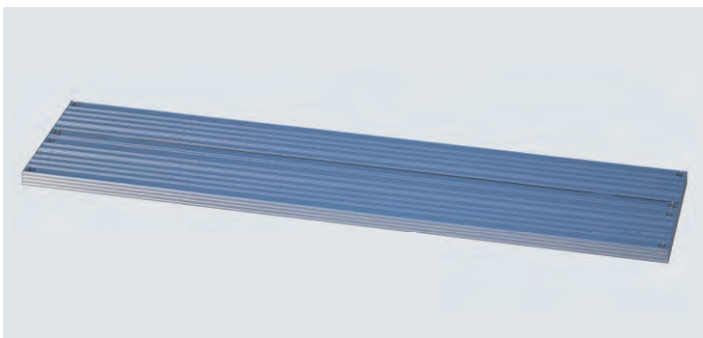**Aluminium floor panel**

Dimensions in cm	Scaffold class as per DIN 12810/12811 ff						For catch scaffolds and roof safety systems
	1	2	3	4	5	6	
150 x 59 x 4.8	●	●	●	●	●	●	■
200 x 59 x 4.8	●	●	●	●	●	(●)	■
250 x 59 x 4.8	●	●	●	●	–	–	■
300 x 59 x 4.8	●	●	●	●	–	–	■

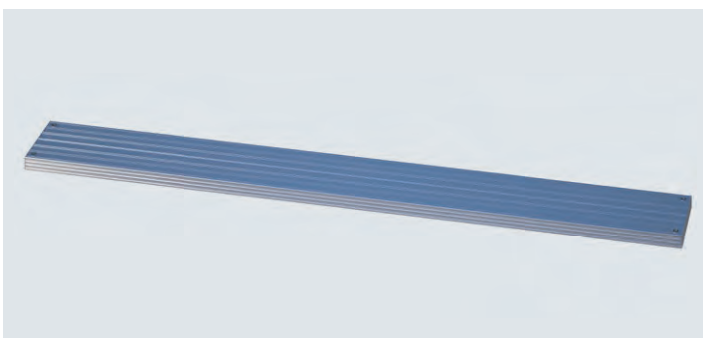**Aluminium plank**

Dimensions in cm	Scaffold class as per DIN 12810/12811 ff						For catch scaffolds and roof safety systems
	1	2	3	4	5	6	
150 x 29 x 4.8	●	●	●	●	●	●	■
200 x 29 x 4.8	●	●	●	●	●	●	■
250 x 29 x 4.8	●	●	●	●	●	●	■
300 x 29 x 4.8	●	●	●	●	–	–	■
400 x 29 x 4.8	●	●	●	–	–	–	■

## APPROVAL Z-8.1-185.1 FOR RUX SUPER 65

**2**

**Allgemeine bauaufsichtliche Zulassung / Allgemeine Bauartgenehmigung**

**1**

Deutsches Institut für Bautechnik **DIBt**

Eine vom Bund und den Ländern gemeinsam getragene Anstalt des öffentlichen Rechts

**Zulassungs- und Genehmigungsstelle für Bauprodukte und Bauarten**

Datum: 30.06.2023 Geschäftszahlen: I 37.1-1.8.1-35/20

**3** Nummer: **Z-8.1-185.1**

**4** Geltungsdauer vom: **30. Juni 2023** bis: **5. Januar 2027**

**5** Antragsteller: **Scafo-m-rux GmbH**  
 Neue Straße 7  
 58135 Hagen

**6** Gegenstand dieses Bescheides: **Gerüstbauteile für das Gerüstsystem "RUX Schnellbaugerüst Super 65"**

**7** Der oben genannte Regelungsgegenstand wird hiermit allgemein bauaufsichtlich zugelassen und genehmigt.  
 Dieser Bescheid umfasst 21 Seiten sowie Anlage A (Seiten 1 bis 129), Anlage B (Seiten 1 bis 12) und Anlage C (Seiten 1 bis 52).  
 Diese allgemeine bauaufsichtliche Zulassung / allgemeine Bauartgenehmigung ersetzt die allgemeine bauaufsichtliche Zulassung / allgemeine Bauartgenehmigung Nr. Z-8.1-185.1 vom 29. Januar 2021. Der Gegenstand ist erstmals am 25. Januar 1988 allgemein bauaufsichtlich zugelassen worden.

**DIBt**  
 DIBt | Kolonnenstraße 30 B | D 10829 Berlin | Tel.: +49 30 78730-0 | Fax: +49 30 78730-320 | E-Mail: dibt@dibt.de | www.dibt.de

- Deutsches Institut für Bautechnik (DIBt)  
 A public agency sponsored jointly by the federal and state governments  
 Authorisation and approval department for construction products and types of construction  
 Date: 30 June 2023, Reference: I 37.1-1.8.1-35/20
- General technical approval / general type approval
- Approval number: Z-8.1-185.1
- Validity: from 30 June 2023 to 5 January 2027
- Applicant: Scafo-m-rux GmbH  
 Neue Str. 7, 58135 Hagen
- Subject of approval:  
 Scaffolding components for the "Rux rapid-erection scaffolding system Super 65"
- The above-mentioned subject of approval is herewith provided with a general type approval. This general type approval comprises 21 pages and an Appendix A (pages 1 to 129), Appendix B (pages 1 to 12) as well as Appendix C (pages 1 to 52). This general technical approval / general type approval replaces the general technical approval / general type approval no. Z-8.1-185.1 dated 29 January 2021.  
 The subject was first given a general type approval on 25 January 1988.

**9**

**Bescheid**

**8**

Deutsches Institut für Bautechnik **DIBt**

Eine vom Bund und den Ländern gemeinsam getragene Anstalt des öffentlichen Rechts

**Zulassungs- und Genehmigungsstelle für Bauprodukte und Bauarten**

Datum: 23.01.2024 Geschäftszahlen: I 37.1-1.8.1-53/23

**10** Nummer: **Z-8.1-185.1**

**11** Geltungsdauer vom: **23. Januar 2024** bis: **5. Januar 2027**

**12** Antragsteller: **Scafo-m-rux GmbH**  
 Neue Straße 7  
 58135 Hagen

**13** Gegenstand des Bescheides: **Gerüstbauteile für das "RUX Schnellbaugerüst Super 65"**

**14** Dieser Bescheid ändert und ergänzt die allgemeine bauaufsichtliche Zulassung / allgemeine Bauartgenehmigung Nr. Z-8.1-185.1 vom 30. Juni 2023. Dieser Bescheid umfasst drei Seiten und neun Anlagen. Er gilt nur in Verbindung mit der oben genannten allgemeinen bauaufsichtlichen Zulassung / allgemeinen Bauartgenehmigung und darf nur zusammen mit dieser verwendet werden.

**DIBt**  
 DIBt | Kolonnenstraße 30 B | D 10829 Berlin | Tel.: +49 30 78730-0 | Fax: +49 30 78730-320 | E-Mail: dibt@dibt.de | www.dibt.de

- Deutsches Institut für Bautechnik (DIBt)  
 A public agency sponsored jointly by the federal and state governments  
 Authorisation and approval department for construction products and types of construction  
 Date: 23 January 2024  
 Reference: I 37.1-1.8.1-53/23
- Notification of the amendment and supplement to the general technical approval / general type approval dated 30 June 2023
- Approval number: Z-8.1-185.1
- Validity: from 23 January 2024 to 5 January 2027
- Applicant: Scafo-m-rux GmbH  
 Neue Str. 7, 58135 Hagen
- Subject of approval:  
 Scaffolding components for the "Rux rapid-erection scaffolding system Super 65"
- This decision amends and supplements the general technical approval / general type approval no. Z-8.1-185.1 dated 30 June 2023. This decision comprises 3 pages and 9 annexes. It is only valid in conjunction with the above-mentioned general technical approval / general type approval and may only be used in conjunction with the latter.

## APPROVAL Z-8.1-185.2 FOR RUX SUPER 100

**2** **Allgemeine bauaufsichtliche Zulassung / Allgemeine Bauartgenehmigung**

**1** **Deutsches Institut für Bautechnik** **DIBt**

Eine vom Bund und den Ländern gemeinsam getragene Anstalt des öffentlichen Rechts

**Zulassungs- und Genehmigungsstelle für Bauprodukte und Bauarten**

Datum: 20.02.2023      Geschäftszeichen: I 37.1-1.8.1-44/22

**3** **Nummer:**  
**Z-8.1-185.2**

**5** **Antragsteller:**  
**Scafom-rux GmbH**  
Neue Straße 7  
58135 Hagen

**4** **Geltungsdauer**  
vom: **13. Februar 2023**  
bis: **13. Februar 2028**

**6** **Gegenstand dieses Bescheides:**  
**Gerüstbauteile für das Gerüstsystem "RUX Schnellbaugerüst Super 100"**

**7** Der oben genannte Regelungsgegenstand wird hiermit allgemein bauaufsichtlich zugelassen und genehmigt.  
Dieser Bescheid umfasst 20 Seiten sowie Anlage A (Seiten 1 bis 107), Anlage B (Seiten 1 bis 13) und Anlage C (Seiten 1 bis 62).  
Der Gegenstand ist erstmals am 25. Januar 1988 allgemein bauaufsichtlich zugelassen worden.

**DIBt**

DIBt | Kolonnenstraße 30 B | D-10829 Berlin | Tel.: +49 30 78730-0 | Fax: +49 30 78730-320 | E-Mail: dibt@dibt.de | www.dibt.de

- 1** Deutsches Institut für Bautechnik (DIBt)  
A public agency sponsored jointly by the federal and state governments  
Authorisation and approval department for construction products and types of construction  
Date: 20 February 2023  
Reference: I 37.1-1.8.1-40/17
- 2** General technical approval / general type approval
- 3** Approval number: Z-8.1-185.2
- 4** Validity: from 13 February 2023 to 13 February 2028
- 5** Applicant:  
Scafom-rux GmbH  
Neue Str. 7, 58135 Hagen
- 6** Subject of approval:  
Scaffolding components for the "Rux rapid-erection scaffolding system Super 100"
- 7** The above-mentioned subject of approval is herewith provided with a general type approval. This general type approval comprises 20 pages and an Appendix A (pages 1 to 107), Appendix B (pages 1 to 13) as well as Appendix C (pages 1 to 62).  
The subject was first given a general type approval on 25 January 1988.





## SERVICE IS OUR HALLMARK, AND MARKING IS OUR SERVICE FOR YOU!

**Ownership marking is becoming increasingly important** – sometimes finance houses and insurers even demand this. But looking on the positive side: a professional external image and advertising impact should not be underestimated!

We offer various forms of material marking ranging from embossing and screen printing to solutions with stickers. Depending on the material, quantities involved and the motifs desired, there are a number of possible options which we would very much like to discuss with you in detail.



### COATING

The classic solution for scaffolding! Just get some paint on it. That is exactly what we do with our rental material, too. Also available in fashionable RAL colours for your new material.



### METAL EMBOSSING

We can supply individually embossed steel strip already affixed to the planks if desired. Individually embossed U-shaped caps are also available for SUPER planks.



### OUR K++ STICKERS: YUCK!

Our K++ stickers are not quite as tasty as jelly babies, but they are just as colourful and a whole lot stickier – so at least it is two out of three points here! Moreover, they cannot be removed in a single piece, but only in shreds. And the best thing: they are available with your motif in small lot sizes!



### EMBOSSING, COATING, STICKERS: **LAST!**

Anyone knowing a little about the whole thing, knows that it is not quite so easy to find marking solutions that last for a long time – and that is what is needed, of course. We work together with suppliers that are extremely proficient in the areas of embossing, marking, coating, labelling, adhesion etc.

Ask us to provide you with an individual quotation!



The **technical information** on our K++ stickers can be found in the download section of the [scafom-rux.de](http://scafom-rux.de) homepage.





## CALCULATOR, NEWS + MANUALS

You can access approval documents, technical details and manuals on our website with the APP. Our animations and current scafom-rux news are also available there.

So it is probably a good idea to surf over to the iOS or Android store and download the scaffold APP from there! Free of charge and without any in-app purchases.

## QUICK ON-THE-SPOT ESTIMATE? APP-SOLUTELY NO PROBLEM!

**Who doesn't know the situation: an impromptu enquiry** and the customer is located along the way, so drive over quickly and have a look at the situation. Then the typical question: "Well, what sort of price can I expect?"

You will always have the answer right in your pocket: namely your smartphone with our scaffold APP. **This enables you to quickly calculate the parts needed for a façade or modular scaffolding as well as stair towers.** A few seconds later the customer has a general idea of the cost and you already have a rough parts list. You could even email us this list directly and make an order out of it. Not exactly unselfish, but still ingenious, isn't it?



## NUMEROUS IMAGES, FEW WORDS: SCAFOM-RUX FILMS AND ANIMATIONS

**Moving images providing information on the application, assembly and benefits** of proven or new scafom-rux products? "Can't do any harm", we thought some years ago. In the meantime, the video library has grown to some 100 clips and the feedback from users proves that they are being readily used.


Our movies are available on **Youtube.de** and **Vimeo.com**. And when things get really tough, you can always use them to keep your interns quiet and happy for a while...

## SORTED BY PRODUCT GROUPS, OPTIMISED FOR ALL DEVICES: [WWW.SCAFOM-RUX.DE/EN/RECOURES/VIDEOS](http://WWW.SCAFOM-RUX.DE/EN/RECOURES/VIDEOS)



### E.g. SCAFFPLANK building site protection:

Protection against vandalism and noise as well as for passers-by during demolition work can be simply implemented through the use of standard planking that is just inserted into the system-independent SCAFFPLANK rails.

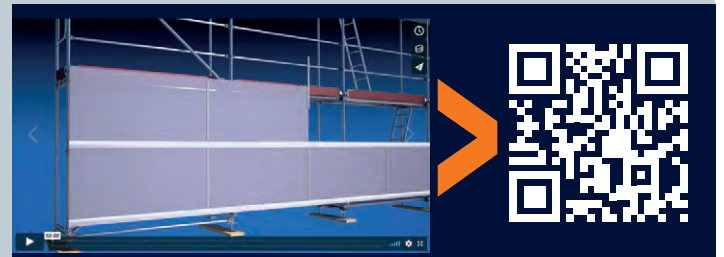

### E.g. SCAFFGUARD scaffold cladding:

Economic, system-independent enclosures – and that with a minimal storage requirement. Building sites with scaffolding can be cladded very simply using SCAFFGUARD. System-independent!

## MORE THAN 60 YEARS' EXPERIENCE

We have been involved in the manufacture of scaffolding for quite some time now. So it is not really surprising that our product ranges have been consistently adapted to meet market requirements and correspondingly enlarged.

But for all this, we have never lost sight of the fact that the user prefers specific components – namely those that are already in one's own stock. In other words, new products will always be confronted with the same question: "Is everything still compatible?".

Admittedly, we no longer have any parts in our ranges that are compatible with wooden ladder scaffolds... but otherwise we ensure economic product sustainability wherever it makes sense.

Our developments MULTI-ROOF and SCAFFPLANK are just two examples from many in this respect. The MULTI-ROOF solution can be accomplished using existing RINGSCAFF ledgers and in the case of SCAFFPLANK, existing decking can be used to protect the building site.



**An intensive exchange with scaffold users** additionally ensures that new developments really do make the daily work on the building sites easier: e.g. in terms of logistics, assembly and material optimisation and that they are, of course, needs-oriented. After all, you know best what you require in order to get the job done really well.

As an important part of the international scafom-rux group, we are more effective than ever: networked worldwide with specialists from development, manufacturing and application technology, we combine our profound expertise to go one step further in finding the best solution for your great projects. To put it in a nutshell:


## SMART DETAILS, GREAT SOLUTIONS!



### 02 Façade scaffolding

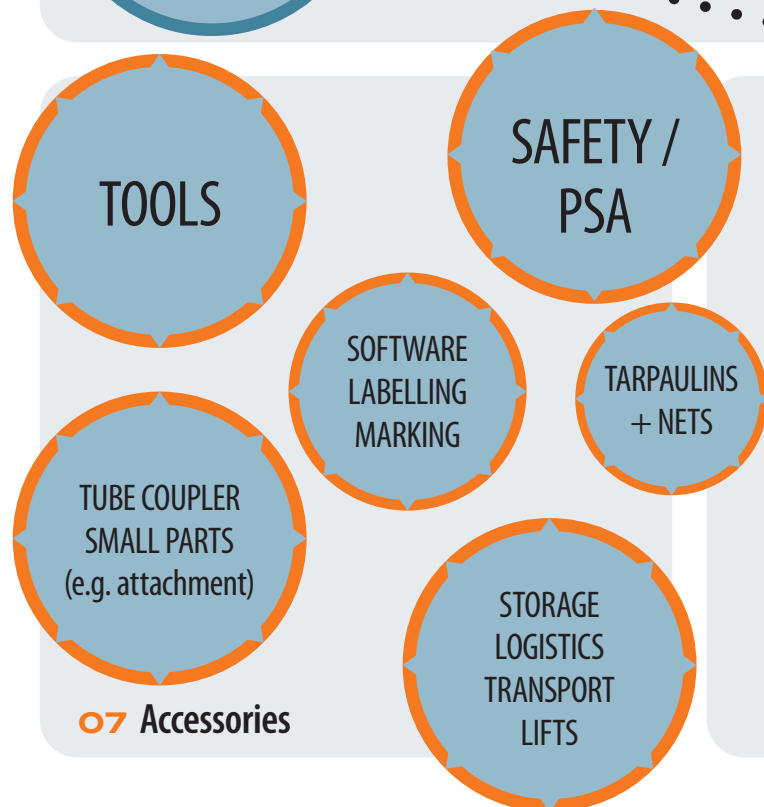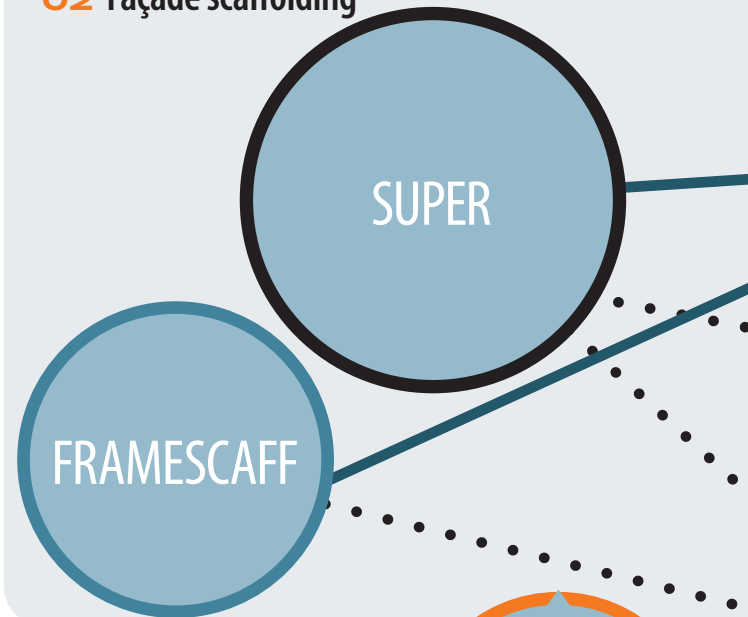

*This overview shows you just how wide our product range is and how well one thing interconnects with the other.*

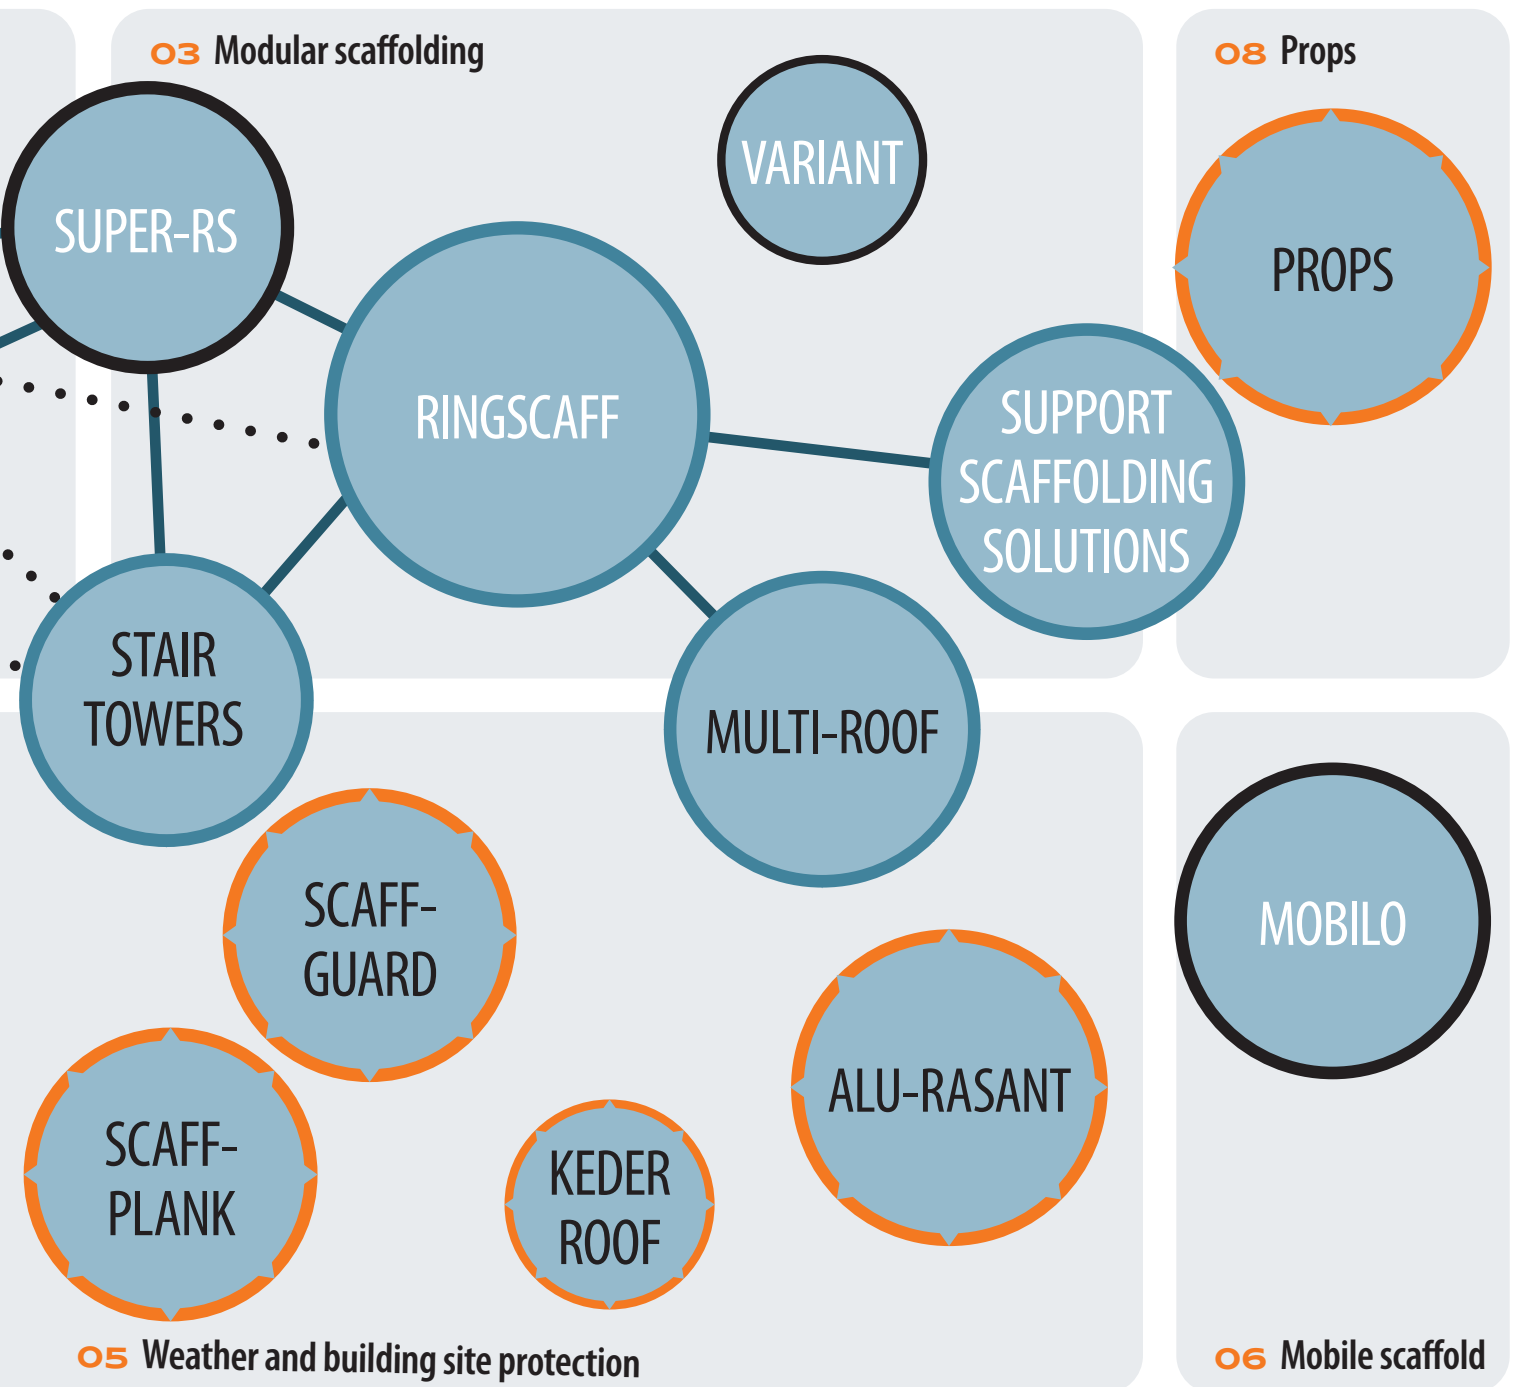

**99 Category**

**SYSTEM**

COMPATIBLE  
SYSTEM WITH  
MIXING  
APPROVAL

SYSTEM-  
INDEPENDENT  
APPLICATION

SYSTEM-  
ACCOMPANYING

CONNECTABLE

## SCAFOM-RUX RENTAL - THE CLEVER ALTERNATIVE



### RENTING INSTEAD OF BUYING - STAY LIQUID!

FAÇADE SCAFFOLDING, MODULAR SCAFFOLDING,  
ACCESSORIES, STAIR TOWERS, ROOFING, LIFTS

**In times like these, flexibility is absolutely essential** if you wish to stay competitive. Renting scaffold material is a real alternative to buying both in terms of material availability as well as when peak order demands have to be met.

Our rental specialists will gladly inform you about when and for whom rental is worthwhile.

**YOU HAVE THE PROJECT,  
WE SUPPLY THE MISSING  
PUZZLE PIECES**

- **Flexibility both financially and in terms of time**
- **Planning and calculation reliability**
- **Fixed, low monthly payments instead of high investments**
- **Original material in manufacturer quality**
- **Safeguarding of order peaks**
- **Closing investment gaps**





#### THE SCAFOM-RUX RENTAL-TEAM AVAILABLE FOR YOU

Phone +49 2331 47 09-333  
Fax +49 2331 47 09-222  
E-Mail [rental@scafom-rux.de](mailto:rental@scafom-rux.de)



### RENTAL AND COLLECTION DEPOTS IN GERMANY

#### Central Depot Hagen

Neue Str. 7  
58135 Hagen  
Telephone +49 (0) 2331 4709-333

#### Rental Depot Leipzig

An der Bahn 11  
04319 Leipzig-Engelsdorf  
Telephone +49 (0)341 251 38 05

#### Rental Depot Hamburg

Kulemannstieg 5  
22457 Hamburg  
Telephone +49 (0)40 54 80 57 48

#### Rental Depot Berlin

Zobtener Str. 73  
10317 Berlin-Lichtenberg  
Telephone +49 (0)30 51 58 88-22

#### Rental Depot Hannover

Entenfangweg 9  
30419 Hannover  
T +49 (0)511 450 100 00

#### Rental Depot Munich

Krautgartenstr. 36  
85241 Hebertshausen  
Telephone +49 (0)175 50 76 708

MODULAR SCAFFOLDING  
FAÇADE SCAFFOLDING  
WEATHER PROTECTION  
BUILDING SITE PROTECTION  
MOBILE SCAFFOLDS  
PROPS  
ACCESSORIES  
IDEAS

STRONGER.  
**TOGETHER.**



APP



Vimeo | YOUTUBE



FACEBOOK



LINKEDIN



**SCAFOM-RUX.DE**

**Scafom-rux GmbH**

Neue Str. 7 · 58135 Hagen · Germany  
T +49 2331 4709-0 · [info@scafom-rux.de](mailto:info@scafom-rux.de)

**scafom-rux**